

cpp-hocon

Generated by Doxygen 1.9.4



<b>1 C++ HOCON Parser</b>	<b>1</b>
1.1 Caveats	1
1.2 Build Requirements	1
1.3 Pre-Build	2
1.4 Building	2
1.5 Testing	2
<b>2 Namespace Index</b>	<b>3</b>
2.1 Namespace List	3
<b>3 Hierarchical Index</b>	<b>5</b>
3.1 Class Hierarchy	5
<b>4 Class Index</b>	<b>9</b>
4.1 Class List	9
<b>5 File Index</b>	<b>13</b>
5.1 File List	13
<b>6 Namespace Documentation</b>	<b>15</b>
6.1 hocon Namespace Reference	15
6.1.1 Detailed Description	19
6.1.2 Typedef Documentation	19
6.1.2.1 duration	19
6.1.2.2 shared_config	19
6.1.2.3 shared_container	19
6.1.2.4 shared_include_context	19
6.1.2.5 shared_includer	20
6.1.2.6 shared_list	20
6.1.2.7 shared_node	20
6.1.2.8 shared_node_array	20
6.1.2.9 shared_node_concatenation	20
6.1.2.10 shared_node_list	20
6.1.2.11 shared_node_object	21
6.1.2.12 shared_node_value	21
6.1.2.13 shared_object	21
6.1.2.14 shared_origin	21
6.1.2.15 shared_parseable	21
6.1.2.16 shared_string	21
6.1.2.17 shared_token	22
6.1.2.18 shared_value	22
6.1.2.19 token_list	22
6.1.2.20 unwrapped_value	22
6.1.3 Enumeration Type Documentation	22

6.1.3.1 config_include_kind . . . . .	22
6.1.3.2 config_string_type . . . . .	23
6.1.3.3 origin_type . . . . .	23
6.1.3.4 resolve_status . . . . .	23
6.1.3.5 time_unit . . . . .	23
6.1.3.6 token_type . . . . .	23
6.1.4 Function Documentation . . . . .	23
6.1.4.1 make_resolve_result() . . . . .	24
6.1.4.2 operator==( ) . . . . .	24
6.2 std Namespace Reference . . . . .	24
6.2.1 Detailed Description . . . . .	28
6.2.2 Function Documentation . . . . .	28
6.2.2.1 begin() . . . . .	28
6.2.2.2 end() . . . . .	28
<b>7 Class Documentation</b> . . . . .	<b>29</b>
7.1 hocon::abstract_config_node Class Reference . . . . .	29
7.1.1 Detailed Description . . . . .	29
7.1.2 Member Function Documentation . . . . .	29
7.1.2.1 render() . . . . .	29
7.2 hocon::abstract_config_node_value Class Reference . . . . .	30
7.2.1 Detailed Description . . . . .	30
7.2.2 Member Function Documentation . . . . .	30
7.2.2.1 render() . . . . .	30
7.3 hocon::bad_path_exception Struct Reference . . . . .	31
7.3.1 Detailed Description . . . . .	31
7.3.2 Constructor & Destructor Documentation . . . . .	31
7.3.2.1 bad_path_exception() [1/2] . . . . .	31
7.3.2.2 bad_path_exception() [2/2] . . . . .	32
7.4 hocon::bad_value_exception Struct Reference . . . . .	32
7.4.1 Detailed Description . . . . .	32
7.4.2 Constructor & Destructor Documentation . . . . .	32
7.4.2.1 bad_value_exception() [1/2] . . . . .	33
7.4.2.2 bad_value_exception() [2/2] . . . . .	33
7.5 hocon::bug_or_broken_exception Struct Reference . . . . .	33
7.5.1 Detailed Description . . . . .	34
7.5.2 Constructor & Destructor Documentation . . . . .	34
7.5.2.1 bug_or_broken_exception() . . . . .	34
7.6 hocon::comment Class Reference . . . . .	34
7.6.1 Detailed Description . . . . .	35
7.6.2 Member Function Documentation . . . . .	35
7.6.2.1 operator==( ) . . . . .	35

7.6.2.2 to_string()	35
7.7 hocon::config Class Reference	35
7.7.1 Detailed Description	38
7.7.2 Member Function Documentation	39
7.7.2.1 at_key()	39
7.7.2.2 at_path()	40
7.7.2.3 check_valid()	40
7.7.2.4 entry_set()	41
7.7.2.5 get_duration()	42
7.7.2.6 get_homogeneous_unwrapped_list()	42
7.7.2.7 get_is_null()	42
7.7.2.8 has_path()	43
7.7.2.9 has_path_or_null()	43
7.7.2.10 is_empty()	44
7.7.2.11 is_resolved()	44
7.7.2.12 origin()	45
7.7.2.13 parse_file_any_syntax() [1/2]	45
7.7.2.14 parse_file_any_syntax() [2/2]	46
7.7.2.15 parse_string() [1/2]	46
7.7.2.16 parse_string() [2/2]	47
7.7.2.17 resolve() [1/2]	47
7.7.2.18 resolve() [2/2]	48
7.7.2.19 resolve_with() [1/2]	48
7.7.2.20 resolve_with() [2/2]	49
7.7.2.21 root()	49
7.7.2.22 to_fallback_value()	49
7.7.2.23 with_fallback()	50
7.7.2.24 with_only_path()	50
7.7.2.25 with_value()	52
7.7.2.26 without_path()	52
7.7.3 Friends And Related Function Documentation	53
7.7.3.1 config_object	53
7.7.3.2 config_parseable	53
7.7.3.3 config_value	53
7.7.3.4 parseable	53
7.8 hocon::config_boolean Class Reference	54
7.8.1 Detailed Description	55
7.8.2 Member Enumeration Documentation	55
7.8.2.1 type	56
7.8.3 Member Function Documentation	56
7.8.3.1 at_key()	56
7.8.3.2 at_path()	56

7.8.3.3 equals()	57
7.8.3.4 new_copy()	57
7.8.3.5 operator==()	57
7.8.3.6 origin()	57
7.8.3.7 relativized()	57
7.8.3.8 render() [1/2]	58
7.8.3.9 render() [2/2]	58
7.8.3.10 to_fallback_value()	59
7.8.3.11 transform_to_string()	59
7.8.3.12 type_name()	59
7.8.3.13 unwrapped()	59
7.8.3.14 value_type()	60
7.8.3.15 value_type_name()	60
7.8.3.16 with_fallback()	60
7.8.3.17 with_origin()	61
7.9 hocon::config_concatenation Class Reference	61
7.9.1 Detailed Description	63
7.9.2 Member Enumeration Documentation	63
7.9.2.1 type	64
7.9.3 Member Function Documentation	64
7.9.3.1 at_key()	64
7.9.3.2 at_path()	64
7.9.3.3 equals()	65
7.9.3.4 get_resolve_status()	65
7.9.3.5 has_descendant()	65
7.9.3.6 ignores_fallbacks()	65
7.9.3.7 new_copy()	65
7.9.3.8 operator==()	66
7.9.3.9 origin()	66
7.9.3.10 relativized()	66
7.9.3.11 render() [1/3]	66
7.9.3.12 render() [2/3]	67
7.9.3.13 render() [3/3]	67
7.9.3.14 replace_child()	68
7.9.3.15 resolve_substitutions()	68
7.9.3.16 to_fallback_value()	68
7.9.3.17 type_name()	68
7.9.3.18 unmerged_values()	69
7.9.3.19 unwrapped()	69
7.9.3.20 value_type()	69
7.9.3.21 value_type_name()	69
7.9.3.22 with_fallback()	70

7.9.3.23 with_origin()	70
7.10 hocon::config_delayed_merge Class Reference	72
7.10.1 Detailed Description	74
7.10.2 Member Enumeration Documentation	74
7.10.2.1 type	74
7.10.3 Member Function Documentation	74
7.10.3.1 at_key()	74
7.10.3.2 at_path()	75
7.10.3.3 equals()	75
7.10.3.4 get_resolve_status()	75
7.10.3.5 has_descendant()	75
7.10.3.6 ignores_fallbacks()	76
7.10.3.7 make_replacement()	76
7.10.3.8 new_copy()	76
7.10.3.9 operator==()	76
7.10.3.10 origin()	76
7.10.3.11 relativized()	76
7.10.3.12 render() [1/4]	77
7.10.3.13 render() [2/4]	77
7.10.3.14 render() [3/4]	78
7.10.3.15 render() [4/4]	78
7.10.3.16 replace_child()	78
7.10.3.17 resolve_substitutions()	79
7.10.3.18 to_fallback_value()	79
7.10.3.19 type_name()	79
7.10.3.20 unmerged_values()	79
7.10.3.21 unwrapped()	79
7.10.3.22 value_type()	80
7.10.3.23 value_type_name()	80
7.10.3.24 with_fallback()	80
7.10.3.25 with_origin()	81
7.11 hocon::config_delayed_merge_object Class Reference	81
7.11.1 Detailed Description	83
7.11.2 Member Typedef Documentation	84
7.11.2.1 iterator	84
7.11.3 Member Enumeration Documentation	84
7.11.3.1 type	84
7.11.4 Member Function Documentation	84
7.11.4.1 at_key()	84
7.11.4.2 at_path()	85
7.11.4.3 attempt_peek_with_partial_resolve()	85
7.11.4.4 begin()	85

7.11.4.5 construct_delayed_merge()	86
7.11.4.6 end()	86
7.11.4.7 entry_set()	86
7.11.4.8 equals()	86
7.11.4.9 get()	86
7.11.4.10 get_resolve_status()	87
7.11.4.11 has_descendant()	87
7.11.4.12 ignores_fallbacks()	87
7.11.4.13 is_empty()	87
7.11.4.14 key_set()	87
7.11.4.15 make_replacement()	88
7.11.4.16 new_copy() [1/2]	88
7.11.4.17 new_copy() [2/2]	88
7.11.4.18 operator==()	88
7.11.4.19 operator[]()	88
7.11.4.20 origin()	89
7.11.4.21 relativized()	89
7.11.4.22 render() [1/4]	89
7.11.4.23 render() [2/4]	90
7.11.4.24 render() [3/4]	90
7.11.4.25 render() [4/4]	90
7.11.4.26 replace_child()	91
7.11.4.27 resolve_substitutions()	91
7.11.4.28 size()	91
7.11.4.29 to_config()	91
7.11.4.30 to_fallback_value()	92
7.11.4.31 type_name()	92
7.11.4.32 unmerged_values()	92
7.11.4.33 unwrapped()	92
7.11.4.34 value_type()	92
7.11.4.35 value_type_name()	93
7.11.4.36 with_fallback()	93
7.11.4.37 with_only_path()	94
7.11.4.38 with_only_path_or_null()	94
7.11.4.39 with_origin()	94
7.11.4.40 with_value() [1/2]	95
7.11.4.41 with_value() [2/2]	95
7.11.4.42 without_path()	95
7.12 hocon::config_document Class Reference	95
7.12.1 Detailed Description	96
7.12.2 Member Function Documentation	96
7.12.2.1 has_path()	96



7.12.2.2 render()	97
7.12.2.3 with_value()	97
7.12.2.4 with_value_text()	97
7.12.2.5 without_path()	98
7.13 hocon::config_double Class Reference	99
7.13.1 Detailed Description	101
7.13.2 Member Enumeration Documentation	101
7.13.2.1 type	101
7.13.3 Member Function Documentation	101
7.13.3.1 at_key()	101
7.13.3.2 at_path()	101
7.13.3.3 double_value()	102
7.13.3.4 equals()	102
7.13.3.5 long_value()	102
7.13.3.6 new_copy()	102
7.13.3.7 operator==()	103
7.13.3.8 origin()	103
7.13.3.9 relativized()	103
7.13.3.10 render() [1/2]	104
7.13.3.11 render() [2/2]	104
7.13.3.12 to_fallback_value()	104
7.13.3.13 transform_to_string()	105
7.13.3.14 type_name()	105
7.13.3.15 unwrapped()	105
7.13.3.16 value_type()	105
7.13.3.17 value_type_name()	106
7.13.3.18 with_fallback()	106
7.13.3.19 with_origin()	107
7.13.4 Member Data Documentation	107
7.13.4.1 _original_text	107
7.14 hocon::config_exception Struct Reference	108
7.14.1 Detailed Description	108
7.14.2 Constructor & Destructor Documentation	108
7.14.2.1 config_exception() [1/3]	109
7.14.2.2 config_exception() [2/3]	109
7.14.2.3 config_exception() [3/3]	109
7.15 hocon::config_include_context Class Reference	109
7.15.1 Detailed Description	110
7.15.2 Constructor & Destructor Documentation	110
7.15.2.1 config_include_context()	110
7.15.3 Member Function Documentation	110
7.15.3.1 get_cur_dir()	110

7.15.3.2	<a href="#">parse_options()</a>	111
7.15.3.3	<a href="#">relative_to()</a>	111
7.15.3.4	<a href="#">set_cur_dir()</a>	111
7.15.4	<a href="#">Member Data Documentation</a>	112
7.15.4.1	<a href="#">_cur_dir</a>	112
7.16	<a href="#">hocon::config_includer Class Reference</a>	112
7.16.1	<a href="#">Detailed Description</a>	112
7.16.2	<a href="#">Member Function Documentation</a>	112
7.16.2.1	<a href="#">include()</a>	113
7.16.2.2	<a href="#">with_fallback()</a>	113
7.17	<a href="#">hocon::config_includer_file Class Reference</a>	114
7.17.1	<a href="#">Detailed Description</a>	114
7.17.2	<a href="#">Member Function Documentation</a>	114
7.17.2.1	<a href="#">include_file()</a>	114
7.18	<a href="#">hocon::config_int Class Reference</a>	115
7.18.1	<a href="#">Detailed Description</a>	117
7.18.2	<a href="#">Member Enumeration Documentation</a>	117
7.18.2.1	<a href="#">type</a>	117
7.18.3	<a href="#">Member Function Documentation</a>	117
7.18.3.1	<a href="#">at_key()</a>	117
7.18.3.2	<a href="#">at_path()</a>	118
7.18.3.3	<a href="#">double_value()</a>	118
7.18.3.4	<a href="#">equals()</a>	118
7.18.3.5	<a href="#">long_value()</a>	118
7.18.3.6	<a href="#">new_copy()</a>	119
7.18.3.7	<a href="#">operator==()</a>	119
7.18.3.8	<a href="#">origin()</a>	119
7.18.3.9	<a href="#">relativized()</a>	119
7.18.3.10	<a href="#">render()</a> [1/2]	120
7.18.3.11	<a href="#">render()</a> [2/2]	120
7.18.3.12	<a href="#">to_fallback_value()</a>	121
7.18.3.13	<a href="#">transform_to_string()</a>	121
7.18.3.14	<a href="#">type_name()</a>	121
7.18.3.15	<a href="#">unwrapped()</a>	121
7.18.3.16	<a href="#">value_type()</a>	121
7.18.3.17	<a href="#">value_type_name()</a>	122
7.18.3.18	<a href="#">with_fallback()</a>	122
7.18.3.19	<a href="#">with_origin()</a>	123
7.18.4	<a href="#">Member Data Documentation</a>	123
7.18.4.1	<a href="#">_original_text</a>	123
7.19	<a href="#">hocon::config_list Class Reference</a>	124
7.19.1	<a href="#">Detailed Description</a>	126

7.19.2 Member Typedef Documentation	126
7.19.2.1 iterator	126
7.19.3 Member Enumeration Documentation	126
7.19.3.1 type	126
7.19.4 Constructor & Destructor Documentation	126
7.19.4.1 config_list()	127
7.19.5 Member Function Documentation	127
7.19.5.1 at_key()	127
7.19.5.2 at_path()	127
7.19.5.3 equals()	128
7.19.5.4 origin()	128
7.19.5.5 relativized()	128
7.19.5.6 render() [1/2]	129
7.19.5.7 render() [2/2]	129
7.19.5.8 to_fallback_value()	129
7.19.5.9 type_name()	130
7.19.5.10 unwrapped()	130
7.19.5.11 value_type()	130
7.19.5.12 value_type_name()	130
7.19.5.13 with_fallback()	131
7.19.5.14 with_origin()	131
7.20 hocon::config_long Class Reference	133
7.20.1 Detailed Description	135
7.20.2 Member Enumeration Documentation	135
7.20.2.1 type	135
7.20.3 Member Function Documentation	135
7.20.3.1 at_key()	135
7.20.3.2 at_path()	136
7.20.3.3 double_value()	136
7.20.3.4 equals()	136
7.20.3.5 long_value()	136
7.20.3.6 new_copy()	137
7.20.3.7 operator==()	137
7.20.3.8 origin()	137
7.20.3.9 relativized()	137
7.20.3.10 render() [1/2]	138
7.20.3.11 render() [2/2]	138
7.20.3.12 to_fallback_value()	139
7.20.3.13 transform_to_string()	139
7.20.3.14 type_name()	139
7.20.3.15 unwrapped()	139
7.20.3.16 value_type()	139

7.20.3.17 value_type_name()	140
7.20.3.18 with_fallback()	140
7.20.3.19 with_origin()	141
7.20.4 Member Data Documentation	141
7.20.4.1 _original_text	141
7.21 hocon::config_mergeable Class Reference	142
7.21.1 Detailed Description	142
7.21.2 Member Function Documentation	143
7.21.2.1 to_fallback_value()	143
7.21.2.2 with_fallback()	143
7.21.3 Friends And Related Function Documentation	144
7.21.3.1 config_value	144
7.22 hocon::config_node Class Reference	144
7.22.1 Detailed Description	145
7.22.2 Member Function Documentation	145
7.22.2.1 render()	145
7.23 hocon::config_node_array Class Reference	145
7.23.1 Detailed Description	146
7.23.2 Member Function Documentation	146
7.23.2.1 get_tokens()	146
7.23.2.2 new_node()	146
7.23.2.3 render()	146
7.24 hocon::config_node_comment Class Reference	147
7.24.1 Detailed Description	147
7.24.2 Member Function Documentation	147
7.24.2.1 get_tokens()	147
7.24.2.2 render()	147
7.25 hocon::config_node_complex_value Class Reference	148
7.25.1 Detailed Description	148
7.25.2 Member Function Documentation	148
7.25.2.1 get_tokens()	148
7.25.2.2 render()	149
7.26 hocon::config_node_concatenation Class Reference	149
7.26.1 Detailed Description	149
7.26.2 Member Function Documentation	150
7.26.2.1 get_tokens()	150
7.26.2.2 new_node()	150
7.26.2.3 render()	150
7.27 hocon::config_node_field Class Reference	150
7.27.1 Detailed Description	151
7.27.2 Member Function Documentation	151
7.27.2.1 get_tokens()	151

7.27.2.2 render()	151
7.28 hocon::config_node_include Class Reference	152
7.28.1 Detailed Description	152
7.28.2 Member Function Documentation	152
7.28.2.1 get_tokens()	152
7.28.2.2 render()	153
7.29 hocon::config_node_object Class Reference	153
7.29.1 Detailed Description	154
7.29.2 Member Function Documentation	154
7.29.2.1 get_tokens()	154
7.29.2.2 new_node()	154
7.29.2.3 render()	154
7.30 hocon::config_node_path Class Reference	155
7.30.1 Detailed Description	155
7.30.2 Member Function Documentation	155
7.30.2.1 get_tokens()	155
7.30.2.2 render()	155
7.31 hocon::config_node_root Class Reference	156
7.31.1 Detailed Description	156
7.31.2 Member Function Documentation	156
7.31.2.1 get_tokens()	156
7.31.2.2 new_node()	157
7.31.2.3 render()	157
7.32 hocon::config_node_simple_value Class Reference	157
7.32.1 Detailed Description	158
7.32.2 Member Function Documentation	158
7.32.2.1 get_tokens()	158
7.32.2.2 render()	158
7.33 hocon::config_node_single_token Class Reference	158
7.33.1 Detailed Description	159
7.33.2 Member Function Documentation	159
7.33.2.1 get_tokens()	159
7.33.2.2 render()	159
7.34 hocon::config_null Class Reference	160
7.34.1 Detailed Description	161
7.34.2 Member Enumeration Documentation	161
7.34.2.1 type	162
7.34.3 Member Function Documentation	162
7.34.3.1 at_key()	162
7.34.3.2 at_path()	162
7.34.3.3 equals()	163
7.34.3.4 new_copy()	163

7.34.3.5 operator==()	163
7.34.3.6 origin()	163
7.34.3.7 relativized()	163
7.34.3.8 render() [1/3]	164
7.34.3.9 render() [2/3]	164
7.34.3.10 render() [3/3]	165
7.34.3.11 to_fallback_value()	165
7.34.3.12 transform_to_string()	165
7.34.3.13 type_name()	165
7.34.3.14 unwrapped()	166
7.34.3.15 value_type()	166
7.34.3.16 value_type_name()	166
7.34.3.17 with_fallback()	167
7.34.3.18 with_origin()	167
7.35 hocon::config_number Class Reference	169
7.35.1 Detailed Description	171
7.35.2 Member Enumeration Documentation	171
7.35.2.1 type	171
7.35.3 Member Function Documentation	171
7.35.3.1 at_key()	171
7.35.3.2 at_path()	172
7.35.3.3 equals()	172
7.35.3.4 operator==()	172
7.35.3.5 origin()	173
7.35.3.6 relativized()	173
7.35.3.7 render() [1/2]	173
7.35.3.8 render() [2/2]	174
7.35.3.9 to_fallback_value()	174
7.35.3.10 transform_to_string()	174
7.35.3.11 type_name()	174
7.35.3.12 value_type()	175
7.35.3.13 value_type_name()	175
7.35.3.14 with_fallback()	175
7.35.3.15 with_origin()	176
7.35.4 Member Data Documentation	176
7.35.4.1 _original_text	176
7.36 hocon::config_object Class Reference	177
7.36.1 Detailed Description	179
7.36.2 Member Typedef Documentation	179
7.36.2.1 iterator	179
7.36.3 Member Enumeration Documentation	179
7.36.3.1 type	179

7.36.4 Member Function Documentation	180
7.36.4.1 at_key()	180
7.36.4.2 at_path()	180
7.36.4.3 attempt_peek_with_partial_resolve()	180
7.36.4.4 construct_delayed_merge()	181
7.36.4.5 equals()	181
7.36.4.6 key_set()	181
7.36.4.7 new_copy()	182
7.36.4.8 origin()	182
7.36.4.9 relativized()	182
7.36.4.10 render() [1/2]	183
7.36.4.11 render() [2/2]	183
7.36.4.12 to_config()	183
7.36.4.13 to_fallback_value()	184
7.36.4.14 type_name()	184
7.36.4.15 value_type()	184
7.36.4.16 value_type_name()	184
7.36.4.17 with_fallback()	185
7.36.4.18 with_only_path_or_null()	185
7.36.4.19 with_origin()	186
7.36.5 Friends And Related Function Documentation	186
7.36.5.1 config	186
7.36.5.2 config_delayed_merge_object	186
7.36.5.3 config_value	186
7.36.5.4 resolve_source	187
7.36.5.5 simple_config_object	187
7.37 hocon::config_origin Class Reference	187
7.37.1 Detailed Description	188
7.37.2 Member Function Documentation	188
7.37.2.1 comments()	188
7.37.2.2 description()	188
7.37.2.3 line_number()	189
7.37.2.4 with_comments()	189
7.37.2.5 with_line_number()	189
7.38 hocon::config_parse_options Class Reference	190
7.38.1 Detailed Description	191
7.38.2 Constructor & Destructor Documentation	191
7.38.2.1 config_parse_options()	191
7.38.3 Member Function Documentation	191
7.38.3.1 append_includer()	191
7.38.3.2 defaults()	192
7.38.3.3 get_allow_missing()	192

7.38.3.4 <code>get_includer()</code>	192
7.38.3.5 <code>get_origin_description()</code>	193
7.38.3.6 <code>get_syntax()</code>	193
7.38.3.7 <code>prepend_includer()</code>	193
7.38.3.8 <code>set_allow_missing()</code>	193
7.38.3.9 <code>set_includer()</code>	194
7.38.3.10 <code>set_origin_description()</code>	194
7.38.3.11 <code>set_syntax()</code>	195
7.39 <code>hocon::config_parseable</code> Class Reference	195
7.39.1 Detailed Description	196
7.39.2 Member Function Documentation	196
7.39.2.1 <code>options()</code>	196
7.39.2.2 <code>origin()</code>	196
7.39.2.3 <code>parse()</code>	196
7.40 <code>hocon::config_reference</code> Class Reference	197
7.40.1 Detailed Description	199
7.40.2 Member Enumeration Documentation	199
7.40.2.1 <code>type</code>	199
7.40.3 Member Function Documentation	199
7.40.3.1 <code>at_key()</code>	199
7.40.3.2 <code>at_path()</code>	199
7.40.3.3 <code>equals()</code>	200
7.40.3.4 <code>get_resolve_status()</code>	200
7.40.3.5 <code>ignores_fallbacks()</code>	200
7.40.3.6 <code>new_copy()</code>	200
7.40.3.7 <code>operator==()</code>	201
7.40.3.8 <code>origin()</code>	201
7.40.3.9 <code>relativized()</code>	201
7.40.3.10 <code>render()</code> [1/3]	202
7.40.3.11 <code>render()</code> [2/3]	202
7.40.3.12 <code>render()</code> [3/3]	202
7.40.3.13 <code>resolve_substitutions()</code>	203
7.40.3.14 <code>to_fallback_value()</code>	203
7.40.3.15 <code>type_name()</code>	203
7.40.3.16 <code>unmerged_values()</code>	203
7.40.3.17 <code>unwrapped()</code>	204
7.40.3.18 <code>value_type()</code>	204
7.40.3.19 <code>value_type_name()</code>	204
7.40.3.20 <code>with_fallback()</code>	205
7.40.3.21 <code>with_origin()</code>	205
7.41 <code>hocon::config_render_options</code> Class Reference	207
7.41.1 Detailed Description	208



7.41.2 Constructor & Destructor Documentation	208
7.41.2.1 config_render_options()	208
7.41.3 Member Function Documentation	208
7.41.3.1 concise()	208
7.41.3.2 get_comments()	209
7.41.3.3 get_formatted()	209
7.41.3.4 get_json()	209
7.41.3.5 get_origin_comments()	209
7.41.3.6 set_comments()	209
7.41.3.7 set_formatted()	210
7.41.3.8 set_json()	210
7.41.3.9 set_origin_comments()	211
7.42 hocon::config_resolve_options Class Reference	211
7.42.1 Detailed Description	212
7.42.2 Constructor & Destructor Documentation	212
7.42.2.1 config_resolve_options()	212
7.42.3 Member Function Documentation	212
7.42.3.1 get_allow_unresolved()	213
7.42.3.2 get_use_system_environment()	213
7.42.3.3 set_allow_unresolved()	213
7.42.3.4 set_use_system_environment()	214
7.43 hocon::config_string Class Reference	214
7.43.1 Detailed Description	216
7.43.2 Member Enumeration Documentation	216
7.43.2.1 type	216
7.43.3 Member Function Documentation	216
7.43.3.1 at_key()	216
7.43.3.2 at_path()	217
7.43.3.3 equals()	217
7.43.3.4 new_copy()	217
7.43.3.5 operator==()	217
7.43.3.6 origin()	218
7.43.3.7 relativized()	218
7.43.3.8 render() [1/3]	218
7.43.3.9 render() [2/3]	219
7.43.3.10 render() [3/3]	219
7.43.3.11 to_fallback_value()	219
7.43.3.12 transform_to_string()	220
7.43.3.13 type_name()	220
7.43.3.14 unwrapped()	220
7.43.3.15 value_type()	220
7.43.3.16 value_type_name()	220

7.43.3.17 with_fallback()	221
7.43.3.18 with_origin()	221
7.44 hocon::config_value Class Reference	223
7.44.1 Detailed Description	225
7.44.2 Member Enumeration Documentation	225
7.44.2.1 type	226
7.44.3 Member Function Documentation	226
7.44.3.1 at_key()	226
7.44.3.2 at_path()	226
7.44.3.3 equals()	227
7.44.3.4 origin()	227
7.44.3.5 relativized()	227
7.44.3.6 render() [1/2]	228
7.44.3.7 render() [2/2]	228
7.44.3.8 to_fallback_value()	228
7.44.3.9 type_name()	229
7.44.3.10 value_type()	229
7.44.3.11 value_type_name()	229
7.44.3.12 with_fallback()	230
7.44.3.13 with_origin()	230
7.44.4 Friends And Related Function Documentation	231
7.44.4.1 config	231
7.44.4.2 config_concatenation	231
7.44.4.3 config_delayed_merge	231
7.44.4.4 config_delayed_merge_object	231
7.44.4.5 config_object	232
7.44.4.6 default_transformer	232
7.44.4.7 resolve_context	232
7.44.4.8 simple_config_list	232
7.44.4.9 simple_config_object	232
7.44.4.10 token	232
7.44.4.11 value	233
7.45 hocon::config_value_factory Class Reference	233
7.45.1 Detailed Description	233
7.45.2 Member Function Documentation	233
7.45.2.1 from_any_ref()	233
7.46 hocon::container Class Reference	234
7.46.1 Detailed Description	234
7.46.2 Member Function Documentation	234
7.46.2.1 has_descendant()	235
7.46.2.2 replace_child()	235
7.47 hocon::default_transformer Class Reference	235

7.47.1 Detailed Description	235
7.48 hocon::double_slash_comment Class Reference	236
7.48.1 Detailed Description	236
7.48.2 Member Function Documentation	236
7.48.2.1 operator==()	236
7.48.2.2 to_string()	236
7.48.2.3 token_text()	237
7.49 hocon::file_name_source Class Reference	237
7.49.1 Detailed Description	237
7.49.2 Member Function Documentation	237
7.49.2.1 context_initialized()	237
7.49.2.2 get_context()	238
7.49.2.3 name_to_parseable()	238
7.49.2.4 set_context()	238
7.50 hocon::full_includer Class Reference	238
7.50.1 Detailed Description	239
7.50.2 Member Function Documentation	239
7.50.2.1 include()	239
7.50.2.2 include_file()	239
7.50.2.3 with_fallback()	240
7.51 FwdListIter< T > Class Template Reference	240
7.51.1 Detailed Description	241
7.51.2 Constructor & Destructor Documentation	241
7.51.2.1 FwdListIter() [1/2]	241
7.51.2.2 FwdListIter() [2/2]	241
7.51.3 Member Function Documentation	241
7.51.3.1 operator!=(())	241
7.51.3.2 operator*()	241
7.51.3.3 operator++()	242
7.51.3.4 operator==(())	242
7.52 hocon::generic_exception Struct Reference	242
7.52.1 Detailed Description	242
7.52.2 Constructor & Destructor Documentation	243
7.52.2.1 generic_exception()	243
7.53 hocon::hash_comment Class Reference	243
7.53.1 Detailed Description	243
7.53.2 Member Function Documentation	243
7.53.2.1 operator==()	244
7.53.2.2 to_string()	244
7.53.2.3 token_text()	244
7.54 hocon::ignored_whitespace Class Reference	244
7.54.1 Detailed Description	245

7.54.2 Member Function Documentation	245
7.54.2.1 operator==()	245
7.54.2.2 to_string()	245
7.55 hocon::io_exception Struct Reference	245
7.55.1 Detailed Description	246
7.55.2 Constructor & Destructor Documentation	246
7.55.2.1 io_exception()	246
7.56 hocon::iterator Class Reference	246
7.56.1 Detailed Description	246
7.57 hocon::iterator_wrapper< iter > Class Template Reference	247
7.57.1 Detailed Description	247
7.57.2 Constructor & Destructor Documentation	247
7.57.2.1 iterator_wrapper()	247
7.57.3 Member Function Documentation	247
7.57.3.1 has_next()	247
7.57.3.2 next()	248
7.58 hocon::line Class Reference	248
7.58.1 Detailed Description	248
7.58.2 Member Function Documentation	248
7.58.2.1 operator==()	248
7.58.2.2 to_string()	249
7.59 List< T > Class Template Reference	249
7.59.1 Detailed Description	249
7.59.2 Constructor & Destructor Documentation	249
7.59.2.1 List() [1/3]	250
7.59.2.2 List() [2/3]	250
7.59.2.3 List() [3/3]	250
7.59.3 Member Function Documentation	250
7.59.3.1 forEach()	250
7.59.3.2 front()	250
7.59.3.3 headCount()	251
7.59.3.4 insertedAt()	251
7.59.3.5 isEmpty()	251
7.59.3.6 member()	251
7.59.3.7 popped_front()	251
7.59.3.8 pushed_front()	252
7.59.3.9 removed()	252
7.59.3.10 removed1()	252
7.59.3.11 take()	252
7.59.4 Friends And Related Function Documentation	252
7.59.4.1 FwdListIter< T >	252
7.60 hocon::missing_exception Struct Reference	253

7.60.1 Detailed Description	253
7.60.2 Constructor & Destructor Documentation	253
7.60.2.1 missing_exception()	253
7.60.3 Member Function Documentation	253
7.60.3.1 config_exception() [1/3]	254
7.60.3.2 config_exception() [2/3]	254
7.60.3.3 config_exception() [3/3]	254
7.61 hocon::config_value::modifier Class Reference	254
7.61.1 Detailed Description	255
7.62 hocon::name_source Class Reference	255
7.62.1 Detailed Description	255
7.62.2 Constructor & Destructor Documentation	255
7.62.2.1 name_source() [1/2]	255
7.62.2.2 name_source() [2/2]	256
7.62.3 Member Function Documentation	256
7.62.3.1 context_initialized()	256
7.62.3.2 get_context()	256
7.62.3.3 set_context()	256
7.63 hocon::config_value::no_exceptions_modifier Class Reference	256
7.63.1 Detailed Description	257
7.63.2 Member Function Documentation	257
7.63.2.1 modify_child_may_throw()	257
7.64 hocon::not_possible_to_resolve_exception Struct Reference	257
7.64.1 Detailed Description	258
7.64.2 Constructor & Destructor Documentation	258
7.64.2.1 not_possible_to_resolve_exception()	258
7.65 hocon::not_resolved_exception Struct Reference	258
7.65.1 Detailed Description	259
7.65.2 Constructor & Destructor Documentation	259
7.65.2.1 not_resolved_exception()	259
7.66 hocon::null_exception Struct Reference	259
7.66.1 Detailed Description	260
7.66.2 Constructor & Destructor Documentation	260
7.66.2.1 null_exception()	260
7.66.3 Member Function Documentation	260
7.66.3.1 config_exception() [1/3]	260
7.66.3.2 config_exception() [2/3]	260
7.66.3.3 config_exception() [3/3]	261
7.67 OutListIter< T > Class Template Reference	261
7.67.1 Detailed Description	261
7.67.2 Constructor & Destructor Documentation	261
7.67.2.1 OutListIter()	261

7.67.3 Member Function Documentation	262
7.67.3.1 getList()	262
7.67.3.2 operator*()	262
7.67.3.3 operator++()	262
7.68 hocon::config_document_parser::parse_context Class Reference	262
7.68.1 Detailed Description	262
7.68.2 Member Function Documentation	263
7.68.2.1 parse_single_value()	263
7.69 hocon::config_parser::parse_context Class Reference	263
7.69.1 Detailed Description	263
7.69.2 Member Data Documentation	263
7.69.2.1 array_count	263
7.70 hocon::parse_exception Struct Reference	264
7.70.1 Detailed Description	264
7.70.2 Constructor & Destructor Documentation	264
7.70.2.1 parse_exception()	264
7.71 hocon::parseable Class Reference	265
7.71.1 Detailed Description	265
7.71.2 Member Function Documentation	265
7.71.2.1 options()	266
7.71.2.2 origin()	266
7.71.2.3 parse()	266
7.72 hocon::parseable_file Class Reference	267
7.72.1 Detailed Description	267
7.72.2 Member Function Documentation	268
7.72.2.1 create_origin()	268
7.72.2.2 guess_syntax()	268
7.72.2.3 options()	268
7.72.2.4 origin()	268
7.72.2.5 parse()	268
7.72.2.6 reader()	269
7.73 hocon::parseable_not_found Class Reference	269
7.73.1 Detailed Description	270
7.73.2 Member Function Documentation	270
7.73.2.1 create_origin()	270
7.73.2.2 options()	270
7.73.2.3 origin()	270
7.73.2.4 parse()	270
7.73.2.5 reader()	271
7.74 hocon::parseable_resources Class Reference	271
7.74.1 Detailed Description	272
7.74.2 Member Function Documentation	272

7.74.2.1 create_origin()	272
7.74.2.2 options()	272
7.74.2.3 origin()	273
7.74.2.4 parse()	273
7.74.2.5 reader()	273
7.75 hocon::parseable_string Class Reference	273
7.75.1 Detailed Description	274
7.75.2 Member Function Documentation	274
7.75.2.1 create_origin()	274
7.75.2.2 options()	275
7.75.2.3 origin()	275
7.75.2.4 parse()	275
7.75.2.5 reader()	276
7.76 hocon::path Class Reference	276
7.76.1 Detailed Description	276
7.76.2 Member Function Documentation	277
7.76.2.1 has_funky_chars()	277
7.76.2.2 parent()	277
7.76.2.3 remainder()	277
7.76.2.4 render()	277
7.76.2.5 to_string()	277
7.77 hocon::path_builder Class Reference	278
7.77.1 Detailed Description	278
7.77.2 Member Function Documentation	278
7.77.2.1 result()	278
7.78 hocon::path_parser Class Reference	278
7.78.1 Detailed Description	278
7.79 hocon::problem Class Reference	279
7.79.1 Detailed Description	279
7.79.2 Member Function Documentation	279
7.79.2.1 operator==()	279
7.79.2.2 to_string()	279
7.80 hocon::problem_exception Class Reference	280
7.80.1 Detailed Description	280
7.81 hocon::relative_name_source Class Reference	280
7.81.1 Detailed Description	280
7.81.2 Member Function Documentation	281
7.81.2.1 context_initialized()	281
7.81.2.2 get_context()	281
7.81.2.3 name_to_parseable()	281
7.81.2.4 set_context()	281
7.82 hocon::replaceable_merge_stack Class Reference	281

7.82.1 Detailed Description	282
7.82.2 Member Function Documentation	282
7.82.2.1 has_descendant()	282
7.82.2.2 replace_child()	282
7.83 hocon::resolve_context Class Reference	283
7.83.1 Detailed Description	283
7.84 hocon::resolve_result< V > Struct Template Reference	283
7.84.1 Detailed Description	283
7.84.2 Constructor & Destructor Documentation	284
7.84.2.1 resolve_result()	284
7.84.3 Member Data Documentation	284
7.84.3.1 context	284
7.84.3.2 value	284
7.85 hocon::resolve_source Class Reference	284
7.85.1 Detailed Description	285
7.85.2 Member Typedef Documentation	285
7.85.2.1 node	285
7.86 hocon::resolve_source::result_with_path Struct Reference	285
7.86.1 Detailed Description	286
7.86.2 Member Data Documentation	286
7.86.2.1 path_from_root	286
7.86.2.2 result	286
7.87 hocon::simple_config_document Class Reference	286
7.87.1 Detailed Description	287
7.87.2 Member Function Documentation	287
7.87.2.1 has_path()	287
7.87.2.2 render()	287
7.87.2.3 with_value()	287
7.87.2.4 with_value_text()	288
7.87.2.5 without_path()	288
7.88 hocon::simple_config_list Class Reference	290
7.88.1 Detailed Description	292
7.88.2 Member Typedef Documentation	292
7.88.2.1 iterator	292
7.88.3 Member Enumeration Documentation	292
7.88.3.1 type	292
7.88.4 Member Function Documentation	293
7.88.4.1 at_key()	293
7.88.4.2 at_path()	294
7.88.4.3 begin()	294
7.88.4.4 contains()	294
7.88.4.5 end()	295



7.88.4.6 equals()	295
7.88.4.7 get()	295
7.88.4.8 get_resolve_status()	295
7.88.4.9 has_descendant()	295
7.88.4.10 index_of()	296
7.88.4.11 is_empty()	296
7.88.4.12 new_copy()	296
7.88.4.13 operator==()	296
7.88.4.14 operator[]()	296
7.88.4.15 origin()	297
7.88.4.16 relativized()	297
7.88.4.17 render() [1/3]	297
7.88.4.18 render() [2/3]	298
7.88.4.19 render() [3/3]	298
7.88.4.20 replace_child()	298
7.88.4.21 resolve_substitutions()	299
7.88.4.22 size()	299
7.88.4.23 to_fallback_value()	299
7.88.4.24 type_name()	299
7.88.4.25 unwrapped()	299
7.88.4.26 value_type()	300
7.88.4.27 value_type_name()	300
7.88.4.28 with_fallback()	300
7.88.4.29 with_origin()	301
7.89 hocon::simple_config_object Class Reference	301
7.89.1 Detailed Description	304
7.89.2 Member Typedef Documentation	304
7.89.2.1 iterator	304
7.89.3 Member Enumeration Documentation	304
7.89.3.1 type	304
7.89.4 Member Function Documentation	304
7.89.4.1 at_key()	304
7.89.4.2 at_path()	305
7.89.4.3 attempt_peek_with_partial_resolve()	305
7.89.4.4 begin()	306
7.89.4.5 construct_delayed_merge()	306
7.89.4.6 end()	306
7.89.4.7 entry_set()	306
7.89.4.8 equals()	306
7.89.4.9 get()	307
7.89.4.10 get_resolve_status()	307
7.89.4.11 has_descendant()	307

7.89.4.12 ignores_fallbacks()	307
7.89.4.13 is_empty()	307
7.89.4.14 key_set()	308
7.89.4.15 merged_with_object()	308
7.89.4.16 new_copy()	308
7.89.4.17 operator==()	308
7.89.4.18 operator[]()	308
7.89.4.19 origin()	309
7.89.4.20 relativized()	309
7.89.4.21 render() [1/3]	309
7.89.4.22 render() [2/3]	310
7.89.4.23 render() [3/3]	310
7.89.4.24 replace_child()	310
7.89.4.25 resolve_substitutions()	311
7.89.4.26 size()	311
7.89.4.27 to_config()	311
7.89.4.28 to_fallback_value()	311
7.89.4.29 type_name()	312
7.89.4.30 unwrapped()	312
7.89.4.31 value_set()	312
7.89.4.32 value_type()	312
7.89.4.33 value_type_name()	312
7.89.4.34 with_fallback()	313
7.89.4.35 with_fallbacks_ignored()	313
7.89.4.36 with_only_path()	314
7.89.4.37 with_only_path_or_null()	314
7.89.4.38 with_origin()	314
7.89.4.39 with_value() [1/2]	314
7.89.4.40 with_value() [2/2]	315
7.89.4.41 without_path()	315
7.90 hocon::simple_config_origin Class Reference	315
7.90.1 Detailed Description	316
7.90.2 Constructor & Destructor Documentation	316
7.90.2.1 simple_config_origin()	316
7.90.3 Member Function Documentation	316
7.90.3.1 comments()	316
7.90.3.2 description()	317
7.90.3.3 line_number()	317
7.90.3.4 with_comments()	317
7.90.3.5 with_line_number()	318
7.91 hocon::simple_include_context Class Reference	318
7.91.1 Detailed Description	319

7.91.2 Member Function Documentation	319
7.91.2.1 get_cur_dir()	319
7.91.2.2 parse_options()	319
7.91.2.3 relative_to()	319
7.91.2.4 set_cur_dir()	320
7.91.3 Member Data Documentation	320
7.91.3.1 _cur_dir	320
7.92 hocon::simple_includer Class Reference	320
7.92.1 Detailed Description	321
7.92.2 Member Function Documentation	321
7.92.2.1 include()	321
7.92.2.2 include_file()	322
7.92.2.3 with_fallback()	322
7.93 hocon::single_token_iterator Class Reference	323
7.93.1 Detailed Description	323
7.93.2 Member Function Documentation	323
7.93.2.1 has_next()	323
7.93.2.2 next()	324
7.94 hocon::substitution Class Reference	324
7.94.1 Detailed Description	324
7.94.2 Member Function Documentation	324
7.94.2.1 operator==()	324
7.94.2.2 to_string()	325
7.94.2.3 token_text()	325
7.95 hocon::substitution_expression Class Reference	325
7.95.1 Detailed Description	325
7.96 hocon::token Class Reference	326
7.96.1 Detailed Description	326
7.97 hocon::token_iterator Class Reference	326
7.97.1 Detailed Description	327
7.97.2 Member Function Documentation	327
7.97.2.1 has_next()	327
7.97.2.2 next()	327
7.98 hocon::token_list_iterator Class Reference	327
7.98.1 Detailed Description	327
7.98.2 Member Function Documentation	328
7.98.2.1 has_next()	328
7.98.2.2 next()	328
7.99 hocon::tokens Class Reference	328
7.99.1 Detailed Description	328
7.99.2 Member Function Documentation	329
7.99.2.1 start_token()	329

7.100 hocon::unmergeable Class Reference	329
7.100.1 Detailed Description	329
7.101 hocon::unquoted_text Class Reference	330
7.101.1 Detailed Description	330
7.101.2 Member Function Documentation	330
7.101.2.1 operator==()	330
7.101.2.2 to_string()	330
7.102 hocon::unresolved_substitution_exception Struct Reference	331
7.102.1 Detailed Description	331
7.102.2 Constructor & Destructor Documentation	331
7.102.2.1 unresolved_substitution_exception()	331
7.103 hocon::unsupported_exception Struct Reference	332
7.103.1 Detailed Description	332
7.104 hocon::validation_failed_exception Struct Reference	332
7.104.1 Detailed Description	333
7.104.2 Constructor & Destructor Documentation	333
7.104.2.1 validation_failed_exception()	333
7.104.3 Member Data Documentation	333
7.104.3.1 problems	333
7.105 hocon::validation_problem Struct Reference	333
7.105.1 Detailed Description	334
7.105.2 Constructor & Destructor Documentation	334
7.105.2.1 validation_problem()	334
7.105.3 Member Function Documentation	334
7.105.3.1 to_string()	334
7.105.4 Member Data Documentation	334
7.105.4.1 origin	335
7.105.4.2 path	335
7.105.4.3 problem	335
7.106 hocon::value Class Reference	335
7.106.1 Detailed Description	336
7.106.2 Member Function Documentation	336
7.106.2.1 operator==()	336
7.106.2.2 origin()	336
7.106.2.3 to_string()	336
7.107 hocon::wrong_type_exception Struct Reference	336
7.107.1 Detailed Description	337
7.107.2 Constructor & Destructor Documentation	337
7.107.2.1 wrong_type_exception()	337
7.107.3 Member Function Documentation	337
7.107.3.1 config_exception() [1/3]	337
7.107.3.2 config_exception() [2/3]	337

7.107.3.3 config_exception() [3/3]	338
<b>8 File Documentation</b>	<b>339</b>
8.1 config.hpp	339
8.2 config_exception.hpp	341
8.3 config_include_context.hpp	343
8.4 config_includer.hpp	343
8.5 config_includer_file.hpp	343
8.6 config_list.hpp	343
8.7 config_mergeable.hpp	344
8.8 config_object.hpp	344
8.9 config_origin.hpp	345
8.10 config_parse_options.hpp	345
8.11 config_parseable.hpp	346
8.12 config_render_options.hpp	346
8.13 config_resolve_options.hpp	347
8.14 config_syntax.hpp	347
8.15 config_value.hpp	347
8.16 config_value_factory.hpp	349
8.17 export.h	349
8.18 functional_list.hpp	350
8.19 config_document.hpp	354
8.20 config_document_factory.hpp	354
8.21 config_node.hpp	354
8.22 path.hpp	355
8.23 program_options.hpp	355
8.24 types.hpp	356
8.25 hocon/version.h File Reference	357
8.25.1 Detailed Description	357
8.25.2 Macro Definition Documentation	358
8.25.2.1 CPP_HOCON_VERSION	358
8.25.2.2 CPP_HOCON_VERSION_MAJOR	358
8.25.2.3 CPP_HOCON_VERSION_MINOR	358
8.25.2.4 CPP_HOCON_VERSION_PATCH	358
8.25.2.5 CPP_HOCON_VERSION_WITH_COMMIT	358
8.26 version.h	359
8.27 config_document_parser.hpp	359
8.28 config_parser.hpp	360
8.29 config_util.hpp	360
8.30 container.hpp	361
8.31 default_transformer.hpp	361
8.32 full_includer.hpp	361

8.33 abstract_config_node.hpp	361
8.34 abstract_config_node_value.hpp	362
8.35 config_node_array.hpp	362
8.36 config_node_comment.hpp	362
8.37 config_node_complex_value.hpp	362
8.38 config_node_concatenation.hpp	363
8.39 config_node_field.hpp	363
8.40 config_node_include.hpp	363
8.41 config_node_object.hpp	364
8.42 config_node_path.hpp	364
8.43 config_node_root.hpp	365
8.44 config_node_simple_value.hpp	365
8.45 config_node_single_token.hpp	365
8.46 parseable.hpp	366
8.47 path_builder.hpp	367
8.48 path_parser.hpp	367
8.49 replaceable_merge_stack.hpp	368
8.50 resolve_context.hpp	368
8.51 resolve_result.hpp	369
8.52 resolve_source.hpp	369
8.53 simple_config_document.hpp	370
8.54 simple_config_origin.hpp	371
8.55 simple_include_context.hpp	372
8.56 simple_includer.hpp	372
8.57 substitution_expression.hpp	373
8.58 token.hpp	374
8.59 tokenizer.hpp	374
8.60 tokens.hpp	376
8.61 unmergeable.hpp	377
8.62 config_boolean.hpp	378
8.63 config_concatenation.hpp	378
8.64 config_delayed_merge.hpp	379
8.65 config_delayed_merge_object.hpp	380
8.66 config_double.hpp	380
8.67 config_int.hpp	381
8.68 config_long.hpp	381
8.69 config_null.hpp	381
8.70 config_number.hpp	382
8.71 config_reference.hpp	382
8.72 config_string.hpp	383
8.73 simple_config_list.hpp	383
8.74 simple_config_object.hpp	384







# C++ HOCON Parser

The library provides C++ support for the HOCON configuration file format.

## 1.1 Caveats

- Include requires the location specifier, i.e. `include "foo"` won't work but `include file("foo")` will. URL is not yet implemented, and classpath won't be supported as it makes less sense outside of the JVM.
- Unicode testing is absent so support is unknown. There are likely things that won't work.

- OSX or Linux
- GCC  $\geq$  4.8 or Clang  $\geq$  3.4 (with libc++)
- CMake  $\geq$  3.2.2
- Boost Libraries  $\geq$  1.54
- **Leatherman**

## 1.3 Pre-Build

Prepare the cmake release environment:

```
$ mkdir release
$ cd release
$ cmake ..
```

Optionally, also prepare the debug environment:

```
$ mkdir debug
$ cd debug
$ cmake -DCMAKE_BUILD_TYPE=Debug ..
```

## 1.4 Building

1. Enter your build environment of choice, i.e. `cd release` or `cd debug`
2. `make`
3. (optional) install with `make install`

## 1.5 Testing

Run tests with `make test`.

## Chapter 2

# Namespace Index

### 2.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

<a href="#">hocon</a>	Factory for creating <a href="#">config_document</a> instances . . . . .	<a href="#">15</a>
<a href="#">std</a>	STL namespace . . . . .	<a href="#">24</a>



## Chapter 3

# Hierarchical Index

### 3.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

hocon::config_document . . . . .	95
hocon::simple_config_document . . . . .	286
hocon::config_include_context . . . . .	109
hocon::simple_include_context . . . . .	318
hocon::config_includer . . . . .	112
hocon::full_includer . . . . .	238
hocon::simple_includer . . . . .	320
hocon::config_includer_file . . . . .	114
hocon::full_includer . . . . .	238
hocon::simple_includer . . . . .	320
hocon::config_mergeable . . . . .	142
hocon::config . . . . .	35
hocon::config_value . . . . .	223
hocon::config_boolean . . . . .	54
hocon::config_concatenation . . . . .	61
hocon::config_delayed_merge . . . . .	72
hocon::config_list . . . . .	124
hocon::simple_config_list . . . . .	290
hocon::config_null . . . . .	160
hocon::config_number . . . . .	169
hocon::config_double . . . . .	99
hocon::config_int . . . . .	115
hocon::config_long . . . . .	133
hocon::config_object . . . . .	177
hocon::config_delayed_merge_object . . . . .	81
hocon::simple_config_object . . . . .	301
hocon::config_reference . . . . .	197
hocon::config_string . . . . .	214
hocon::config_node . . . . .	144
hocon::abstract_config_node . . . . .	29
hocon::abstract_config_node_value . . . . .	30
hocon::config_node_complex_value . . . . .	148
hocon::config_node_array . . . . .	145

hocon::config_node_concatenation . . . . .	149
hocon::config_node_object . . . . .	153
hocon::config_node_root . . . . .	156
hocon::config_node_field . . . . .	150
hocon::config_node_simple_value . . . . .	157
hocon::config_node_include . . . . .	152
hocon::config_node_path . . . . .	155
hocon::config_node_single_token . . . . .	158
hocon::config_node_comment . . . . .	147
hocon::config_origin . . . . .	187
hocon::simple_config_origin . . . . .	315
hocon::config_parse_options . . . . .	190
hocon::config_parseable . . . . .	195
hocon::parseable . . . . .	265
hocon::parseable_file . . . . .	267
hocon::parseable_not_found . . . . .	269
hocon::parseable_resources . . . . .	271
hocon::parseable_string . . . . .	273
hocon::config_render_options . . . . .	207
hocon::config_resolve_options . . . . .	211
hocon::config_value_factory . . . . .	233
hocon::container . . . . .	234
hocon::config_concatenation . . . . .	61
hocon::replaceable_merge_stack . . . . .	281
hocon::config_delayed_merge . . . . .	72
hocon::config_delayed_merge_object . . . . .	81
hocon::simple_config_list . . . . .	290
hocon::simple_config_object . . . . .	301
hocon::default_transformer . . . . .	235
std::enable_shared_from_this	
hocon::config . . . . .	35
hocon::config_value . . . . .	223
hocon::parseable . . . . .	265
hocon::simple_config_origin . . . . .	315
hocon::simple_includer . . . . .	320
hocon::substitution_expression . . . . .	325
std::exception	
std::runtime_error	
hocon::config_exception . . . . .	108
hocon::bad_path_exception . . . . .	31
hocon::bad_value_exception . . . . .	32
hocon::bug_or_broken_exception . . . . .	33
hocon::not_possible_to_resolve_exception . . . . .	257
hocon::not_resolved_exception . . . . .	258
hocon::generic_exception . . . . .	242
hocon::io_exception . . . . .	245
hocon::missing_exception . . . . .	253
hocon::null_exception . . . . .	259
hocon::parse_exception . . . . .	264
hocon::unresolved_substitution_exception . . . . .	331
hocon::validation_failed_exception . . . . .	332
hocon::wrong_type_exception . . . . .	336
hocon::problem_exception . . . . .	280
hocon::unsupported_exception . . . . .	332
hocon::iterator . . . . .	246
hocon::iterator_wrapper< iter > . . . . .	247

hocon::single_token_iterator . . . . .	323
hocon::token_iterator . . . . .	326
hocon::token_list_iterator . . . . .	327
std::iterator	
FwdListIter< T > . . . . .	240
OutListIter< T > . . . . .	261
List< T > . . . . .	249
List< shared_string > . . . . .	249
hocon::config_value::modifier . . . . .	254
hocon::config_value::no_exceptions_modifier . . . . .	256
hocon::name_source . . . . .	255
hocon::file_name_source . . . . .	237
hocon::relative_name_source . . . . .	280
hocon::config_document_parser::parse_context . . . . .	262
hocon::config_parser::parse_context . . . . .	263
hocon::path . . . . .	276
hocon::path_builder . . . . .	278
hocon::path_parser . . . . .	278
hocon::resolve_context . . . . .	283
hocon::resolve_result< V > . . . . .	283
hocon::resolve_result< shared_value > . . . . .	283
hocon::resolve_source . . . . .	284
hocon::resolve_source::result_with_path . . . . .	285
hocon::token . . . . .	326
hocon::comment . . . . .	34
hocon::double_slash_comment . . . . .	236
hocon::hash_comment . . . . .	243
hocon::ignored_whitespace . . . . .	244
hocon::line . . . . .	248
hocon::problem . . . . .	279
hocon::substitution . . . . .	324
hocon::unquoted_text . . . . .	330
hocon::value . . . . .	335
hocon::tokens . . . . .	328
hocon::unmergeable . . . . .	329
hocon::config_concatenation . . . . .	61
hocon::config_delayed_merge . . . . .	72
hocon::config_delayed_merge_object . . . . .	81
hocon::config_reference . . . . .	197
hocon::validation_problem . . . . .	333





## Chapter 4

# Class Index

### 4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">hocon::abstract_config_node</a>	29
<a href="#">hocon::abstract_config_node_value</a>	
This is used to classify certain <a href="#">abstract_config_node</a> subclasses	30
<a href="#">hocon::bad_path_exception</a>	
Exception indicating that a path expression was invalid	31
<a href="#">hocon::bad_value_exception</a>	
Exception indicating that a value was messed up, for example you may have asked for a duration and the value can't be sensibly parsed as a duration	32
<a href="#">hocon::bug_or_broken_exception</a>	
Exception indicating that there's a bug in something (possibly the library itself) or the runtime environment is broken	33
<a href="#">hocon::comment</a>	34
<a href="#">hocon::config</a>	
An immutable map from config paths to config values	35
<a href="#">hocon::config_boolean</a>	54
<a href="#">hocon::config_concatenation</a>	
A ConfigConcatenation represents a list of values to be concatenated (see the spec)	61
<a href="#">hocon::config_delayed_merge</a>	72
<a href="#">hocon::config_delayed_merge_object</a>	81
<a href="#">hocon::config_document</a>	
Represents an individual HOCON or JSON file, preserving all formatting and syntax details	95
<a href="#">hocon::config_double</a>	99
<a href="#">hocon::config_exception</a>	
All exceptions thrown by the library are subclasses of <a href="#">config_exception</a>	108
<a href="#">hocon::config_include_context</a>	
Context provided to a <a href="#">config_includer</a> ; this interface is only useful inside a <code>config_includer</code> implementation, and is not intended for apps to implement	109
<a href="#">hocon::config_includer</a>	
Implement this interface and provide an instance to <code>config_parse_options.set_includer()</code> to customize handling of <code>include</code> statements in config files	112
<a href="#">hocon::config_includer_file</a>	
Implement this <i>in addition to</i> <a href="#">config_includer</a> if you want to support inclusion of files with the <code>include file("filename")</code> syntax	114
<a href="#">hocon::config_int</a>	115
<a href="#">hocon::config_list</a>	
Subtype of <code>ConfigValue</code> representing a list value, as in JSON's <code>[1, 2, 3]</code> syntax	124

<a href="#">hocon::config_long</a>	133
<a href="#">hocon::config_mergeable</a>	142
<a href="#">hocon::config_node</a>	
A node in the syntax tree for a HOCON or JSON document	144
<a href="#">hocon::config_node_array</a>	145
<a href="#">hocon::config_node_comment</a>	147
<a href="#">hocon::config_node_complex_value</a>	148
<a href="#">hocon::config_node_concatenation</a>	149
<a href="#">hocon::config_node_field</a>	
A field represents a key-value pair of the format "key : value", where key is a quoted or unquoted string, and value can be any node type	150
<a href="#">hocon::config_node_include</a>	
Represents an include statement of the form "include include_kind(include_path)"	152
<a href="#">hocon::config_node_object</a>	153
<a href="#">hocon::config_node_path</a>	155
<a href="#">hocon::config_node_root</a>	156
<a href="#">hocon::config_node_simple_value</a>	157
<a href="#">hocon::config_node_single_token</a>	158
<a href="#">hocon::config_null</a>	
This exists because sometimes null is not the same as missing	160
<a href="#">hocon::config_number</a>	169
<a href="#">hocon::config_object</a>	177
<a href="#">hocon::config_origin</a>	
Represents the origin (such as filename and line number) of a <a href="#">config_value</a> for use in error messages	187
<a href="#">hocon::config_parse_options</a>	
A set of options related to parsing	190
<a href="#">hocon::config_parseable</a>	
An opaque handle to something that can be parsed, obtained from <a href="#">config_include_context</a>	195
<a href="#">hocon::config_reference</a>	197
<a href="#">hocon::config_render_options</a>	207
<a href="#">hocon::config_resolve_options</a>	
A set of options related to resolving substitutions	211
<a href="#">hocon::config_string</a>	214
<a href="#">hocon::config_value</a>	
An immutable value, following the <a href="#">JSON</a> type schema	223
<a href="#">hocon::config_value_factory</a>	233
<a href="#">hocon::container</a>	
An AbstractConfigValue which contains other values	234
<a href="#">hocon::default_transformer</a>	235
<a href="#">hocon::double_slash_comment</a>	236
<a href="#">hocon::file_name_source</a>	237
<a href="#">hocon::full_includer</a>	238
<a href="#">FwdListIter&lt; T &gt;</a>	240
<a href="#">hocon::generic_exception</a>	
Exception that doesn't fall into any other category	242
<a href="#">hocon::hash_comment</a>	243
<a href="#">hocon::ignored_whitespace</a>	244
<a href="#">hocon::io_exception</a>	
Exception indicating that there was an IO error	245
<a href="#">hocon::iterator</a>	246
<a href="#">hocon::iterator_wrapper&lt; iter &gt;</a>	247
<a href="#">hocon::line</a>	248
<a href="#">List&lt; T &gt;</a>	249
<a href="#">hocon::missing_exception</a>	
Exception indicates that the setting was never set to anything, not even null	253
<a href="#">hocon::config_value::modifier</a>	254

<a href="#">hocon::name_source</a>	255
<a href="#">hocon::config_value::no_exceptions_modifier</a>	256
<a href="#">hocon::not_possible_to_resolve_exception</a>	257
<a href="#">hocon::not_resolved_exception</a>	
Exception indicating that you tried to use a function that requires substitutions to be resolved, but substitutions have not been resolved (that is, <a href="#">config#resolve</a> was not called)	258
<a href="#">hocon::null_exception</a>	
Exception indicates that the setting was treated as missing because it was set to null	259
<a href="#">OutListIter&lt; T &gt;</a>	261
<a href="#">hocon::config_document_parser::parse_context</a>	262
<a href="#">hocon::config_parser::parse_context</a>	263
<a href="#">hocon::parse_exception</a>	
Exception indicating that there was a parse error	264
<a href="#">hocon::parseable</a>	265
<a href="#">hocon::parseable_file</a>	267
<a href="#">hocon::parseable_not_found</a>	269
<a href="#">hocon::parseable_resources</a>	271
<a href="#">hocon::parseable_string</a>	273
<a href="#">hocon::path</a>	276
<a href="#">hocon::path_builder</a>	278
<a href="#">hocon::path_parser</a>	278
<a href="#">hocon::problem</a>	279
<a href="#">hocon::problem_exception</a>	280
<a href="#">hocon::relative_name_source</a>	280
<a href="#">hocon::replaceable_merge_stack</a>	281
<a href="#">hocon::resolve_context</a>	283
<a href="#">hocon::resolve_result&lt; V &gt;</a>	283
<a href="#">hocon::resolve_source</a>	284
<a href="#">hocon::resolve_source::result_with_path</a>	285
<a href="#">hocon::simple_config_document</a>	286
<a href="#">hocon::simple_config_list</a>	290
<a href="#">hocon::simple_config_object</a>	301
<a href="#">hocon::simple_config_origin</a>	315
<a href="#">hocon::simple_include_context</a>	318
<a href="#">hocon::simple_includer</a>	320
<a href="#">hocon::single_token_iterator</a>	323
<a href="#">hocon::substitution</a>	324
<a href="#">hocon::substitution_expression</a>	325
<a href="#">hocon::token</a>	326
<a href="#">hocon::token_iterator</a>	326
<a href="#">hocon::token_list_iterator</a>	327
<a href="#">hocon::tokens</a>	328
<a href="#">hocon::unmergeable</a>	
Interface that tags a ConfigValue that is not mergeable until after substitutions are resolved	329
<a href="#">hocon::unquoted_text</a>	330
<a href="#">hocon::unresolved_substitution_exception</a>	
Exception indicating that a substitution did not resolve to anything	331
<a href="#">hocon::unsupported_exception</a>	332
<a href="#">hocon::validation_failed_exception</a>	
Exception indicating that <a href="#">config#check_valid</a> found validity problems	332
<a href="#">hocon::validation_problem</a>	
Information about a problem that occurred in <a href="#">config#check_valid</a>	333
<a href="#">hocon::value</a>	335
<a href="#">hocon::wrong_type_exception</a>	
Exception indicating that the type of a value does not match the type you requested	336



## Chapter 5

# File Index

### 5.1 File List

Here is a list of all documented files with brief descriptions:

hocon/config.hpp	339
hocon/config_exception.hpp	341
hocon/config_include_context.hpp	343
hocon/config_includer.hpp	343
hocon/config_includer_file.hpp	343
hocon/config_list.hpp	343
hocon/config_mergeable.hpp	344
hocon/config_object.hpp	344
hocon/config_origin.hpp	345
hocon/config_parse_options.hpp	345
hocon/config_parseable.hpp	346
hocon/config_render_options.hpp	346
hocon/config_resolve_options.hpp	347
hocon/config_syntax.hpp	347
hocon/config_value.hpp	347
hocon/config_value_factory.hpp	349
hocon/export.h	349
hocon/functional_list.hpp	350
hocon/path.hpp	355
hocon/program_options.hpp	355
hocon/types.hpp	356
hocon/version.h	
Declares macros for the cpp-hocon library version	357
hocon/parser/config_document.hpp	354
hocon/parser/config_document_factory.hpp	354
hocon/parser/config_node.hpp	354
internal/config_document_parser.hpp	359
internal/config_parser.hpp	360
internal/config_util.hpp	360
internal/container.hpp	361
internal/default_transformer.hpp	361
internal/full_includer.hpp	361
internal/parseable.hpp	366
internal/path_builder.hpp	367
internal/path_parser.hpp	367

internal/replaceable_merge_stack.hpp . . . . .	368
internal/resolve_context.hpp . . . . .	368
internal/resolve_result.hpp . . . . .	369
internal/resolve_source.hpp . . . . .	369
internal/simple_config_document.hpp . . . . .	370
internal/simple_config_origin.hpp . . . . .	371
internal/simple_include_context.hpp . . . . .	372
internal/simple_includer.hpp . . . . .	372
internal/substitution_expression.hpp . . . . .	373
internal/token.hpp . . . . .	374
internal/tokenizer.hpp . . . . .	374
internal/tokens.hpp . . . . .	376
internal/unmergeable.hpp . . . . .	377
internal/nodes/abstract_config_node.hpp . . . . .	361
internal/nodes/abstract_config_node_value.hpp . . . . .	362
internal/nodes/config_node_array.hpp . . . . .	362
internal/nodes/config_node_comment.hpp . . . . .	362
internal/nodes/config_node_complex_value.hpp . . . . .	362
internal/nodes/config_node_concatenation.hpp . . . . .	363
internal/nodes/config_node_field.hpp . . . . .	363
internal/nodes/config_node_include.hpp . . . . .	363
internal/nodes/config_node_object.hpp . . . . .	364
internal/nodes/config_node_path.hpp . . . . .	364
internal/nodes/config_node_root.hpp . . . . .	365
internal/nodes/config_node_simple_value.hpp . . . . .	365
internal/nodes/config_node_single_token.hpp . . . . .	365
internal/values/config_boolean.hpp . . . . .	378
internal/values/config_concatenation.hpp . . . . .	378
internal/values/config_delayed_merge.hpp . . . . .	379
internal/values/config_delayed_merge_object.hpp . . . . .	380
internal/values/config_double.hpp . . . . .	380
internal/values/config_int.hpp . . . . .	381
internal/values/config_long.hpp . . . . .	381
internal/values/config_null.hpp . . . . .	381
internal/values/config_number.hpp . . . . .	382
internal/values/config_reference.hpp . . . . .	382
internal/values/config_string.hpp . . . . .	383
internal/values/simple_config_list.hpp . . . . .	383
internal/values/simple_config_object.hpp . . . . .	384

## Chapter 6

# Namespace Documentation

### 6.1 hocon Namespace Reference

Factory for creating [config\\_document](#) instances.

#### Classes

- class [abstract\\_config\\_node](#)
- class [abstract\\_config\\_node\\_value](#)  
*This is used to classify certain [abstract\\_config\\_node](#) subclasses.*
- struct [bad\\_path\\_exception](#)  
*Exception indicating that a path expression was invalid.*
- struct [bad\\_value\\_exception](#)  
*Exception indicating that a value was messed up, for example you may have asked for a duration and the value can't be sensibly parsed as a duration.*
- struct [bug\\_or\\_broken\\_exception](#)  
*Exception indicating that there's a bug in something (possibly the library itself) or the runtime environment is broken.*
- class [comment](#)
- class [config](#)  
*An immutable map from config paths to config values.*
- class [config\\_boolean](#)
- class [config\\_concatenation](#)  
*A ConfigConcatenation represents a list of values to be concatenated (see the spec).*
- class [config\\_delayed\\_merge](#)
- class [config\\_delayed\\_merge\\_object](#)
- class [config\\_document](#)  
*Represents an individual HOCON or JSON file, preserving all formatting and syntax details.*
- class [config\\_double](#)
- struct [config\\_exception](#)  
*All exceptions thrown by the library are subclasses of [config\\_exception](#).*
- class [config\\_include\\_context](#)  
*Context provided to a [config\\_includer](#); this interface is only useful inside a [config\\_includer](#) implementation, and is not intended for apps to implement.*
- class [config\\_includer](#)  
*Implement this interface and provide an instance to [config\\_parse\\_options.set\\_includer\(\)](#) to customize handling of `include` statements in config files.*

- class [config\\_includer\\_file](#)

Implement this in addition to [config\\_includer](#) if you want to support inclusion of files with the `include file("filename")` syntax.

- class [config\\_int](#)
- class [config\\_list](#)

Subtype of `ConfigValue` representing a list value, as in JSON's `[1, 2, 3]` syntax.

- class [config\\_long](#)
- class [config\\_mergeable](#)
- class [config\\_node](#)

A node in the syntax tree for a HOCON or JSON document.

- class [config\\_node\\_array](#)
- class [config\\_node\\_comment](#)
- class [config\\_node\\_complex\\_value](#)
- class [config\\_node\\_concatenation](#)
- class [config\\_node\\_field](#)

A field represents a key-value pair of the format `"key : value"`, where key is a quoted or unquoted string, and value can be any node type.

- class [config\\_node\\_include](#)

Represents an include statement of the form `"include include_kind(include_path)"`.

- class [config\\_node\\_object](#)
- class [config\\_node\\_path](#)
- class [config\\_node\\_root](#)
- class [config\\_node\\_simple\\_value](#)
- class [config\\_node\\_single\\_token](#)
- class [config\\_null](#)

This exists because sometimes null is not the same as missing.

- class [config\\_number](#)
- class [config\\_object](#)
- class [config\\_origin](#)

Represents the origin (such as filename and line number) of a [config\\_value](#) for use in error messages.

- class [config\\_parse\\_options](#)

A set of options related to parsing.

- class [config\\_parseable](#)

An opaque handle to something that can be parsed, obtained from [config\\_include\\_context](#).

- class [config\\_reference](#)
- class [config\\_render\\_options](#)
- class [config\\_resolve\\_options](#)

A set of options related to resolving substitutions.

- class [config\\_string](#)
- class [config\\_value](#)

An immutable value, following the `JSON` type schema.

- class [config\\_value\\_factory](#)
- class [container](#)

An `AbstractConfigValue` which contains other values.

- class [default\\_transformer](#)
- class [double\\_slash\\_comment](#)
- class [file\\_name\\_source](#)
- class [full\\_includer](#)
- struct [generic\\_exception](#)

Exception that doesn't fall into any other category.

- class [hash\\_comment](#)
- class [ignored\\_whitespace](#)
- struct [io\\_exception](#)



*Exception indicating that there was an IO error.*

- class [iterator](#)
- class [iterator\\_wrapper](#)
- class [line](#)
- struct [missing\\_exception](#)

*Exception indicates that the setting was never set to anything, not even null.*

- class [name\\_source](#)
- struct [not\\_possible\\_to\\_resolve\\_exception](#)
- struct [not\\_resolved\\_exception](#)

*Exception indicating that you tried to use a function that requires substitutions to be resolved, but substitutions have not been resolved (that is, [config#resolve](#) was not called).*

- struct [null\\_exception](#)

*Exception indicates that the setting was treated as missing because it was set to null.*

- struct [parse\\_exception](#)

*Exception indicating that there was a parse error.*

- class [parseable](#)
- class [parseable\\_file](#)
- class [parseable\\_not\\_found](#)
- class [parseable\\_resources](#)
- class [parseable\\_string](#)
- class [path](#)
- class [path\\_builder](#)
- class [path\\_parser](#)
- class [problem](#)
- class [problem\\_exception](#)
- class [relative\\_name\\_source](#)
- class [replaceable\\_merge\\_stack](#)
- class [resolve\\_context](#)
- struct [resolve\\_result](#)
- class [resolve\\_source](#)
- class [simple\\_config\\_document](#)
- class [simple\\_config\\_list](#)
- class [simple\\_config\\_object](#)
- class [simple\\_config\\_origin](#)
- class [simple\\_include\\_context](#)
- class [simple\\_includer](#)
- class [single\\_token\\_iterator](#)
- class [substitution](#)
- class [substitution\\_expression](#)
- class [token](#)
- class [token\\_iterator](#)
- class [token\\_list\\_iterator](#)
- class [tokens](#)
- class [unmergeable](#)

*Interface that tags a ConfigValue that is not mergeable until after substitutions are resolved.*

- class [unquoted\\_text](#)
- struct [unresolved\\_substitution\\_exception](#)

*Exception indicating that a substitution did not resolve to anything.*

- struct [unsupported\\_exception](#)
- struct [validation\\_failed\\_exception](#)

*Exception indicating that [config#check\\_valid](#) found validity problems.*

- struct [validation\\_problem](#)

*Information about a problem that occurred in [config#check\\_valid](#).*

- class [value](#)
- struct [wrong\\_type\\_exception](#)

*Exception indicating that the type of a value does not match the type you requested.*

## Typedefs

- using `duration` = `std::pair< int64_t, int >`  
*A duration represented as a 64-bit integer of seconds plus a 32-bit number of nanoseconds representing a fraction of a second.*
- using `shared_config` = `std::shared_ptr< const config >`
- using `shared_object` = `std::shared_ptr< const config_object >`
- using `shared_origin` = `std::shared_ptr< const config_origin >`
- using `shared_value` = `std::shared_ptr< const config_value >`
- using `shared_list` = `std::shared_ptr< const config_list >`
- typedef `boost::make_recursive_variant< boost::blank, std::string, int64_t, double, int, bool, std::vector< boost::recursive_variant_ >, std::unordered_map< std::string, boost::recursive_variant_ > >::type` `unwrapped_value`
- using `shared_container` = `std::shared_ptr< const container >`
- using `shared_node` = `std::shared_ptr< const abstract_config_node >`
- using `shared_node_list` = `std::vector< shared_node >`
- using `shared_string` = `std::shared_ptr< const std::string >`
- using `shared_includer` = `std::shared_ptr< const config_includer >`
- using `shared_include_context` = `std::shared_ptr< const config_include_context >`
- using `shared_parseable` = `std::shared_ptr< const config_parseable >`
- using `shared_node_value` = `std::shared_ptr< const abstract_config_node_value >`
- using `shared_node_array` = `std::shared_ptr< const config_node_array >`
- using `shared_node_concatenation` = `std::shared_ptr< const config_node_concatenation >`
- using `shared_node_object` = `std::shared_ptr< const config_node_object >`
- using `shared_token` = `std::shared_ptr< const token >`
- using `token_list` = `std::vector< shared_token >`

## Enumerations

- enum class `time_unit` { `NANOSECONDS`, `MICROSECONDS`, `MILLISECONDS`, `SECONDS`, `MINUTES`, `HOURS`, `DAYS` }
- enum class `resolve_status` { `RESOLVED`, `UNRESOLVED` }
- enum class `config_include_kind` { `URL`, `FILE`, `CLASSPATH`, `HEURISTIC` }
- enum class `origin_type` { `GENERIC`, `FILE`, `RESOURCE` }
- enum class `token_type` { `START`, `END`, `COMMA`, `EQUALS`, `COLON`, `OPEN_CURLY`, `CLOSE_CURLY`, `OPEN_SQUARE`, `CLOSE_SQUARE`, `VALUE`, `NEWLINE`, `UNQUOTED_TEXT`, `IGNORED_WHITESPACE`, `SUBSTITUTION`, `PROBLEM`, `COMMENT`, `PLUS_EQUALS` }
- enum class `config_string_type` { `QUOTED`, `UNQUOTED` }

## Functions

- bool `operator==` (`config_document` const &lhs, `config_document` const &rhs)  
*Config documents compare via rendered strings.*
- bool `is_whitespace` (char codepoint)
- bool `is_whitespace_not_newline` (char codepoint)
- bool `is_C0_control` (char c)
- std::string `render_json_string` (std::string const &s)
- std::string `render_string_unquoted_if_possible` (std::string const &s)
- template<typename T >  
static `resolve_result`< `shared_value` > `make_resolve_result` (`resolve_context` context, T value)

### 6.1.1 Detailed Description

Factory for creating [config\\_document](#) instances.

The root namespace for cpp-hocon.

### 6.1.2 Typedef Documentation

#### 6.1.2.1 duration

```
using hocon::duration = typedef std::pair<int64_t, int>
```

A duration represented as a 64-bit integer of seconds plus a 32-bit number of nanoseconds representing a fraction of a second.

Definition at line 21 of file [types.hpp](#).

#### 6.1.2.2 shared\_config

```
using hocon::shared_config = typedef std::shared_ptr<const config>
```

Definition at line 24 of file [types.hpp](#).

#### 6.1.2.3 shared\_container

```
using hocon::shared_container = typedef std::shared_ptr<const container>
```

Definition at line 45 of file [types.hpp](#).

#### 6.1.2.4 shared\_include\_context

```
using hocon::shared_include_context = typedef std::shared_ptr<const config_include_context>
```

Definition at line 59 of file [types.hpp](#).

#### 6.1.2.5 shared\_includer

```
using hocon::shared_includer = typedef std::shared_ptr<const config_includer>
```

Definition at line 56 of file [types.hpp](#).

#### 6.1.2.6 shared\_list

```
using hocon::shared_list = typedef std::shared_ptr<const config_list>
```

Definition at line 38 of file [types.hpp](#).

#### 6.1.2.7 shared\_node

```
using hocon::shared_node = typedef std::shared_ptr<const abstract_config_node>
```

Definition at line 48 of file [types.hpp](#).

#### 6.1.2.8 shared\_node\_array

```
using hocon::shared_node_array = typedef std::shared_ptr<const config_node_array>
```

Definition at line 8 of file [config\\_node\\_array.hpp](#).

#### 6.1.2.9 shared\_node\_concatenation

```
using hocon::shared_node_concatenation = typedef std::shared_ptr<const config_node_concatenation>
```

Definition at line 14 of file [config\\_node\\_concatenation.hpp](#).

#### 6.1.2.10 shared\_node\_list

```
using hocon::shared_node_list = typedef std::vector<shared_node>
```

Definition at line 49 of file [types.hpp](#).

#### 6.1.2.11 shared\_node\_object

```
using hocon::shared_node_object = typedef std::shared_ptr<const config_node_object>
```

Definition at line 11 of file [config\\_node\\_object.hpp](#).

#### 6.1.2.12 shared\_node\_value

```
using hocon::shared_node_value = typedef std::shared_ptr<const abstract_config_node_value>
```

Definition at line 10 of file [abstract\\_config\\_node\\_value.hpp](#).

#### 6.1.2.13 shared\_object

```
using hocon::shared_object = typedef std::shared_ptr<const config_object>
```

Definition at line 27 of file [types.hpp](#).

#### 6.1.2.14 shared\_origin

```
using hocon::shared_origin = typedef std::shared_ptr<const config_origin>
```

Definition at line 30 of file [types.hpp](#).

#### 6.1.2.15 shared\_parseable

```
using hocon::shared_parseable = typedef std::shared_ptr<const config_parseable>
```

Definition at line 62 of file [types.hpp](#).

#### 6.1.2.16 shared\_string

```
using hocon::shared_string = typedef std::shared_ptr<const std::string>
```

Definition at line 51 of file [types.hpp](#).

#### 6.1.2.17 shared\_token

```
using hocon::shared_token = typedef std::shared_ptr<const token>
```

Definition at line 42 of file [token.hpp](#).

#### 6.1.2.18 shared\_value

```
using hocon::shared_value = typedef std::shared_ptr<const config_value>
```

Definition at line 35 of file [types.hpp](#).

#### 6.1.2.19 token\_list

```
using hocon::token_list = typedef std::vector<shared_token>
```

Definition at line 43 of file [token.hpp](#).

#### 6.1.2.20 unwrapped\_value

```
typedef boost::make_recursive_variant<boost::blank, std::string, int64_t, double, int, bool, std::vector<boost::recursive_variant_>, std::unordered_map<std::string, boost::recursive_variant_>>::type hocon::unwrapped_value
```

Definition at line 42 of file [types.hpp](#).

### 6.1.3 Enumeration Type Documentation

#### 6.1.3.1 config\_include\_kind

```
enum class hocon::config_include_kind [strong]
```

Definition at line 7 of file [config\\_node\\_include.hpp](#).

### 6.1.3.2 config\_string\_type

```
enum class hocon::config_string_type [strong]
```

Definition at line 8 of file [config\\_string.hpp](#).

### 6.1.3.3 origin\_type

```
enum class hocon::origin_type [strong]
```

Definition at line 11 of file [simple\\_config\\_origin.hpp](#).

### 6.1.3.4 resolve\_status

```
enum class hocon::resolve_status [strong]
```

Definition at line 22 of file [config\\_value.hpp](#).

### 6.1.3.5 time\_unit

```
enum class hocon::time_unit [strong]
```

Definition at line 20 of file [config.hpp](#).

### 6.1.3.6 token\_type

```
enum class hocon::token_type [strong]
```

Definition at line 9 of file [token.hpp](#).

## 6.1.4 Function Documentation

#### 6.1.4.1 make\_resolve\_result()

```
template<typename T >
static resolve_result< shared_value > hocon::make_resolve_result (
    resolve_context context,
    T value ) [static]
```

Definition at line 17 of file [resolve\\_result.hpp](#).

#### 6.1.4.2 operator==()

```
bool hocon::operator== (
    config_document const & lhs,
    config_document const & rhs )
```

Config documents compare via rendered strings.

## 6.2 std Namespace Reference

STL namespace.

### Classes

- class **allocator**  
*STL class.*
- class **array**  
*STL class.*
- class **atomic**  
*STL class.*
- class **atomic\_ref**  
*STL class.*
- class **auto\_ptr**  
*STL class.*
- class **bad\_alloc**  
*STL class.*
- class **bad\_cast**  
*STL class.*
- class **bad\_exception**  
*STL class.*
- class **bad\_typeid**  
*STL class.*
- class **basic\_fstream**  
*STL class.*
- class **basic\_ifstream**  
*STL class.*
- class **basic\_ios**



- STL class.*
- class **basic\_istream**
  - STL class.*
- class **basic\_istream**
  - STL class.*
- class **basic\_istringstream**
  - STL class.*
- class **basic\_ofstream**
  - STL class.*
- class **basic\_ostream**
  - STL class.*
- class **basic\_ostringstream**
  - STL class.*
- class **basic\_string**
  - STL class.*
- class **basic\_string\_view**
  - STL class.*
- class **basic\_stringstream**
  - STL class.*
- class **bitset**
  - STL class.*
- class **complex**
  - STL class.*
- class **deque**
  - STL class.*
- class **domain\_error**
  - STL class.*
- class **error\_category**
  - STL class.*
- class **error\_code**
  - STL class.*
- class **error\_condition**
  - STL class.*
- class **exception**
  - STL class.*
- class **forward\_list**
  - STL class.*
- class **fstream**
  - STL class.*
- class **ifstream**
  - STL class.*
- class **invalid\_argument**
  - STL class.*
- class **ios**
  - STL class.*
- class **ios\_base**
  - STL class.*
- class **istream**
  - STL class.*
- class **istringstream**
  - STL class.*

- class **jthread**  
*STL class.*
- class **length\_error**  
*STL class.*
- class **list**  
*STL class.*
- class **lock\_guard**  
*STL class.*
- class **logic\_error**  
*STL class.*
- class **map**  
*STL class.*
- class **multimap**  
*STL class.*
- class **multiset**  
*STL class.*
- class **mutex**  
*STL class.*
- class **ofstream**  
*STL class.*
- class **ostream**  
*STL class.*
- class **ostringstream**  
*STL class.*
- class **out\_of\_range**  
*STL class.*
- class **overflow\_error**  
*STL class.*
- class **priority\_queue**  
*STL class.*
- class **queue**  
*STL class.*
- class **range\_error**  
*STL class.*
- class **recursive\_mutex**  
*STL class.*
- class **recursive\_timed\_mutex**  
*STL class.*
- class **runtime\_error**  
*STL class.*
- class **set**  
*STL class.*
- class **shared\_lock**  
*STL class.*
- class **shared\_mutex**  
*STL class.*
- class **shared\_ptr**  
*STL class.*
- class **shared\_timed\_mutex**  
*STL class.*
- class **smart\_ptr**

- STL class.*
- class **span**
  - STL class.*
- class **stack**
  - STL class.*
- class **string**
  - STL class.*
- class **string\_view**
  - STL class.*
- class **stringstream**
  - STL class.*
- class **system\_error**
  - STL class.*
- class **thread**
  - STL class.*
- class **timed\_mutex**
  - STL class.*
- class **u16string**
  - STL class.*
- class **u16string\_view**
  - STL class.*
- class **u32string**
  - STL class.*
- class **u32string\_view**
  - STL class.*
- class **u8string**
  - STL class.*
- class **u8string\_view**
  - STL class.*
- class **underflow\_error**
  - STL class.*
- class **unique\_lock**
  - STL class.*
- class **unique\_ptr**
  - STL class.*
- class **unordered\_map**
  - STL class.*
- class **unordered\_multimap**
  - STL class.*
- class **unordered\_multiset**
  - STL class.*
- class **unordered\_set**
  - STL class.*
- class **valarray**
  - STL class.*
- class **vector**
  - STL class.*
- class **weak\_ptr**
  - STL class.*
- class **wfstream**
  - STL class.*

- class **wifstream**  
*STL class.*
- class **wios**  
*STL class.*
- class **wistream**  
*STL class.*
- class **wistringstream**  
*STL class.*
- class **wofstream**  
*STL class.*
- class **wostream**  
*STL class.*
- class **wostreamstream**  
*STL class.*
- class **wstring**  
*STL class.*
- class **wstring\_view**  
*STL class.*
- class **wstringstream**  
*STL class.*

## Functions

- `template<class T >`  
`FwdListIter< T > begin (List< T > const &lst)`
- `template<class T >`  
`FwdListIter< T > end (List< T > const &lst)`

### 6.2.1 Detailed Description

STL namespace.

### 6.2.2 Function Documentation

#### 6.2.2.1 begin()

```
template<class T >
FwdListIter< T > std::begin (
    List< T > const & lst )
```

Definition at line 162 of file [functional\\_list.hpp](#).

#### 6.2.2.2 end()

```
template<class T >
FwdListIter< T > std::end (
    List< T > const & lst )
```


Definition at line 167 of file [functional\\_list.hpp](#).

## Chapter 7

# Class Documentation

### 7.1 hocon::abstract\_config\_node Class Reference

Inheritance diagram for hocon::abstract\_config\_node:

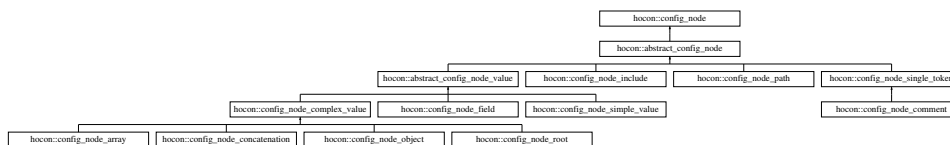

#### Public Member Functions

- `std::string render () const`  
*The original text of the input which was used to form this particular node.*
- `bool operator== (const abstract_config_node &other) const`
- `virtual token_list get_tokens () const =0`

#### 7.1.1 Detailed Description

Definition at line 9 of file [abstract\\_config\\_node.hpp](#).

#### 7.1.2 Member Function Documentation

##### 7.1.2.1 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String

Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:


- `internal/nodes/abstract_config_node.hpp`

## 7.2 hocon::abstract\_config\_node\_value Class Reference

This is used to classify certain [abstract\\_config\\_node](#) subclasses.

```
#include <abstract_config_node_value.hpp>
```

Inheritance diagram for hocon::abstract\_config\_node\_value:

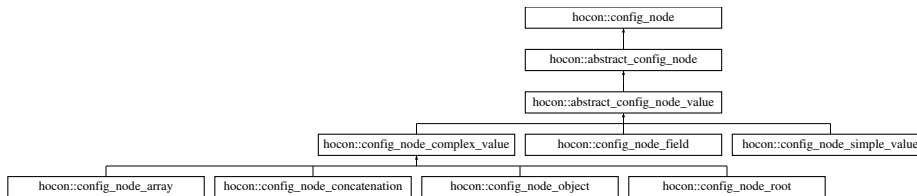

### Public Member Functions

- `std::string render () const`  
*The original text of the input which was used to form this particular node.*
- `bool operator== (const abstract_config_node &other) const`
- `virtual token_list get_tokens () const =0`

### 7.2.1 Detailed Description

This is used to classify certain [abstract\\_config\\_node](#) subclasses.

Definition at line 8 of file [abstract\\_config\\_node\\_value.hpp](#).

### 7.2.2 Member Function Documentation

#### 7.2.2.1 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String

Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:


- `internal/nodes/abstract_config_node_value.hpp`

## 7.3 hocon::bad\_path\_exception Struct Reference

Exception indicating that a path expression was invalid.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::bad\_path\_exception:



### Public Member Functions

- [bad\\_path\\_exception](#) ([config\\_origin](#) const &origin, std::string const &[path](#), std::string const &message)
- [bad\\_path\\_exception](#) (std::string const &[path](#), std::string const &message)

#### 7.3.1 Detailed Description

Exception indicating that a path expression was invalid.

Try putting double quotes around path elements that contain "special" characters.

Definition at line 71 of file [config\\_exception.hpp](#).

#### 7.3.2 Constructor & Destructor Documentation

##### 7.3.2.1 bad\_path\_exception() [1/2]

```

hocon::bad_path_exception::bad_path_exception (
    config\_origin const & origin,
    std::string const & path,
    std::string const & message ) [inline]

```

Definition at line 72 of file [config\\_exception.hpp](#).

### 7.3.2.2 bad\_path\_exception() [2/2]

```
hocon::bad_path_exception::bad_path_exception (
    std::string const & path,
    std::string const & message ) [inline]
```

Definition at line 74 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:


- [hocon/config\\_exception.hpp](#)

## 7.4 hocon::bad\_value\_exception Struct Reference

Exception indicating that a value was messed up, for example you may have asked for a duration and the value can't be sensibly parsed as a duration.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::bad\_value\_exception:



### Public Member Functions

- [bad\\_value\\_exception](#) ([config\\_origin](#) const &origin, std::string const &[path](#), std::string const &message)
- [bad\\_value\\_exception](#) (std::string const &[path](#), std::string const &message)

### 7.4.1 Detailed Description

Exception indicating that a value was messed up, for example you may have asked for a duration and the value can't be sensibly parsed as a duration.

Definition at line 59 of file [config\\_exception.hpp](#).

### 7.4.2 Constructor & Destructor Documentation



## 7.4.2.1 bad\_value\_exception() [1/2]

```
hocon::bad_value_exception::bad_value_exception (
    config_origin const & origin,
    std::string const & path,
    std::string const & message ) [inline]
```

Definition at line 60 of file [config\\_exception.hpp](#).

## 7.4.2.2 bad\_value\_exception() [2/2]

```
hocon::bad_value_exception::bad_value_exception (
    std::string const & path,
    std::string const & message ) [inline]
```

Definition at line 62 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:


- [hocon/config\\_exception.hpp](#)

## 7.5 hocon::bug\_or\_broken\_exception Struct Reference

Exception indicating that there's a bug in something (possibly the library itself) or the runtime environment is broken.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::bug\_or\_broken\_exception:

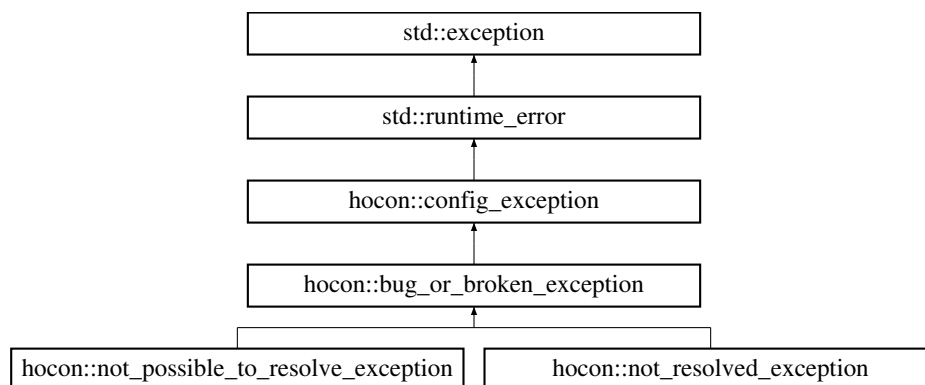

## Public Member Functions

- [bug\\_or\\_broken\\_exception](#) (std::string const &message)

### 7.5.1 Detailed Description

Exception indicating that there's a bug in something (possibly the library itself) or the runtime environment is broken.

This exception should never be handled; instead, something should be fixed to keep the exception from occurring. This exception can be thrown by any method in the library.

Definition at line 85 of file [config\\_exception.hpp](#).

### 7.5.2 Constructor & Destructor Documentation

#### 7.5.2.1 bug\_or\_broken\_exception()

```
hocon::bug_or_broken_exception::bug_or_broken_exception (
    std::string const & message ) [inline]
```


Definition at line 86 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)

## 7.6 hocon::comment Class Reference

Inheritance diagram for hocon::comment:

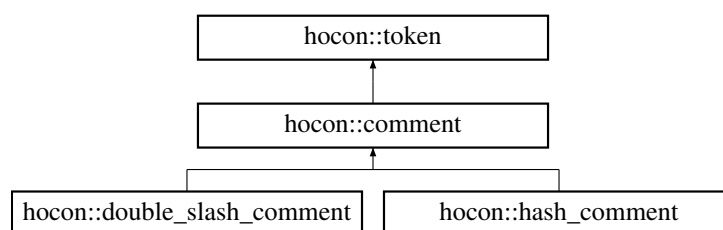

### Public Member Functions

- **comment** (shared\_origin origin, std::string text)
- std::string **text** () const
- std::string **to\_string** () const override
- bool **operator==** (const [token](#) &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual std::string **token\_text** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const

### 7.6.1 Detailed Description

Definition at line 69 of file [tokens.hpp](#).

### 7.6.2 Member Function Documentation

#### 7.6.2.1 operator==( )

```
bool hocon::comment::operator== (
    const token & other ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

#### 7.6.2.2 to\_string( )

```
std::string hocon::comment::to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:


- [internal/tokens.hpp](#)

## 7.7 hocon::config Class Reference

An immutable map from config paths to config values.

```
#include <config.hpp>
```

Inheritance diagram for `hocon::config`:



## Public Member Functions

- virtual shared\_object [root](#) () const  
*Gets the Config as a tree of ConfigObject.*
- virtual shared\_origin [origin](#) () const  
*Gets the origin of the Config, which may be a file, or a file with a line number, or just a descriptive phrase.*
- std::shared\_ptr< const [config\\_mergeable](#) > [with\\_fallback](#) (std::shared\_ptr< const [config\\_mergeable](#) > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- shared\_value [to\\_fallback\\_value](#) () const override  
*Converts a config to its root object and a [config\\_value](#) to itself.*
- virtual shared\_config [resolve](#) () const  
*Returns a replacement config with all substitutions (the `${foo.bar}` syntax, see [the spec](#)) resolved.*
- virtual shared\_config [resolve](#) ([config\\_resolve\\_options](#) options) const  
*Like [config#resolve\(\)](#) but allows you to specify non-default options.*
- virtual bool [is\\_resolved](#) () const  
*Checks whether the config is completely resolved.*
- virtual shared\_config [resolve\\_with](#) (shared\_config source) const  
*Like [config#resolve\(\)](#) except that substitution values are looked up in the given source, rather than in this instance.*
- virtual shared\_config [resolve\\_with](#) (shared\_config source, [config\\_resolve\\_options](#) options) const  
*Like [config#resolve\\_with\(config\)](#) but allows you to specify non-default options.*
- virtual void [check\\_valid](#) (shared\_config reference, std::vector< std::string > restrict\_to\_paths) const  
*Validates this config against a reference config, throwing an exception if it is invalid.*
- virtual bool [has\\_path](#) (std::string const &[path](#)) const  
*Checks whether a value is present and non-null at the given path.*
- virtual bool [has\\_path\\_or\\_null](#) (std::string const &[path](#)) const  
*Checks whether a value is present at the given path, even if the value is null.*
- virtual bool [is\\_empty](#) () const  
*Returns true if the Config's root object contains no key-value pairs.*
- virtual std::set< std::pair< std::string, std::shared\_ptr< const [config\\_value](#) > > > [entry\\_set](#) () const  
*Returns the set of path-value pairs, excluding any null values, found by recursing [the root object](#).*
- virtual bool [get\\_is\\_null](#) (std::string const &[path](#)) const  
*Checks whether a value is set to null at the given path, but throws an exception if the value is entirely unset.*
- virtual bool [get\\_bool](#) (std::string const &[path](#)) const
- virtual int [get\\_int](#) (std::string const &[path](#)) const
- virtual int64\_t [get\\_long](#) (std::string const &[path](#)) const
- virtual double [get\\_double](#) (std::string const &[path](#)) const
- virtual std::string [get\\_string](#) (std::string const &[path](#)) const
- virtual std::shared\_ptr< const [config\\_object](#) > [get\\_object](#) (std::string const &[path](#)) const
- virtual shared\_config [get\\_config](#) (std::string const &[path](#)) const
- virtual unwrapped\_value [get\\_any\\_ref](#) (std::string const &[path](#)) const
- virtual std::shared\_ptr< const [config\\_value](#) > [get\\_value](#) (std::string const &[path](#)) const
- template<typename T >  
std::vector< T > [get\\_homogeneous\\_unwrapped\\_list](#) (std::string const &[path](#)) const
- virtual shared\_list [get\\_list](#) (std::string const &[path](#)) const
- virtual std::vector< bool > [get\\_bool\\_list](#) (std::string const &[path](#)) const
- virtual std::vector< int > [get\\_int\\_list](#) (std::string const &[path](#)) const
- virtual std::vector< int64\_t > [get\\_long\\_list](#) (std::string const &[path](#)) const
- virtual std::vector< double > [get\\_double\\_list](#) (std::string const &[path](#)) const
- virtual std::vector< std::string > [get\\_string\\_list](#) (std::string const &[path](#)) const
- virtual std::vector< shared\_object > [get\\_object\\_list](#) (std::string const &[path](#)) const

- virtual std::vector< shared\_config > **get\_config\_list** (std::string const &path) const
- virtual int64\_t **get\_duration** (std::string const &path, time\_unit unit) const  
*Gets a value as an integer number of the specified units.*
- virtual shared\_config **with\_only\_path** (std::string const &path) const  
*Clone the config with only the given path (and its children) retained; all sibling paths are removed.*
- virtual shared\_config **without\_path** (std::string const &path) const  
*Clone the config with the given path removed.*
- virtual shared\_config **at\_path** (std::string const &path) const  
*Places the config inside another config at the given path.*
- virtual shared\_config **at\_key** (std::string const &key) const  
*Places the config inside a config at the given key.*
- virtual shared\_config **with\_value** (std::string const &path, std::shared\_ptr< const config\_value > value) const  
*Returns a config based on this one, but with the given path set to the given value.*
- bool **operator==** (config const &other) const
- **config** (shared\_object object)
- template<> std::vector< int64\_t > **get\_homogeneous\_unwrapped\_list** (std::string const &path) const

## Static Public Member Functions

- static shared\_config **parse\_file\_any\_syntax** (std::string file\_basename, config\_parse\_options options)  
*Parses a file with a flexible extension.*
- static shared\_config **parse\_file\_any\_syntax** (std::string file\_basename)  
*Like parseFileAnySyntax (File, ConfigParseOptions) but always uses default parse options.*
- static shared\_config **parse\_string** (std::string s, config\_parse\_options options)  
*Parses a string (which should be valid HOCON or JSON by default, or the syntax specified in the options otherwise).*
- static shared\_config **parse\_string** (std::string s)  
*Parses a string (which should be valid HOCON or JSON).*
- static shared\_object **env\_variables\_as\_config\_object** ()

## Protected Member Functions

- shared\_value **find** (std::string const &path\_expression, config\_value::type expected) const
- shared\_value **find** (path path\_expression, config\_value::type expected, path original\_path) const
- shared\_value **find** (path path\_expression, config\_value::type expected) const
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const

## Static Protected Member Functions

- static shared\_includer **default\_includer** ()

## Friends

- class config\_object
- class config\_value
- class config\_parseable
- class parseable

### 7.7.1 Detailed Description

An immutable map from config paths to config values.

Paths are dot-separated expressions such as `foo.bar.baz`. Values are as in JSON (booleans, strings, numbers, lists, or objects), represented by `config_value` instances. Values accessed through the `config` interface are never null.

`config` is an immutable object and thus safe to use from multiple threads. There's never a need for "defensive copies."

Fundamental operations on a `config` include getting configuration values, *resolving* substitutions with `config#resolve()`, and merging configs using `config#with_fallback(config_mergeable)`.

All operations return a new immutable `config` rather than modifying the original instance.

#### Examples

You can find an example app and library [on GitHub](#). Also be sure to read the [package overview](#) which describes the big picture as shown in those examples.

#### Paths, keys, and config vs. `config_object`

`config` is a view onto a tree of `config_object`; the corresponding object tree can be found through `config#root()`. `config_object` is a map from config *keys*, rather than paths, to config values. Think of `config_object` as a JSON object and `config` as a configuration API.

The API tries to consistently use the terms "key" and "path." A key is a key in a JSON object; it's just a string that's the key in a map. A "path" is a parseable expression with a syntax and it refers to a series of keys. Path expressions are described in the [spec for Human-Optimized Config Object Notation](#). In brief, a path is period-separated so "a.b.c" looks for key c in object b in object a in the root object. Sometimes double quotes are needed around special characters in path expressions.

The API for a `config` is in terms of path expressions, while the API for a `config_object` is in terms of keys. Conceptually, `config` is a one-level map from *paths* to values, while a `config_object` is a tree of nested maps from *keys* to values.

Use `config_util#join_path` and `config_util#split_path` to convert between path expressions and individual path elements (keys).

Another difference between `config` and `config_object` is that conceptually, `config_values` with a `value_type()` of `NULL` exist in a `config_object`, while a `config` treats null values as if they were missing. (With the exception of two methods: `config#has_path_or_null` and `config#get_is_null` let you detect null values.)

#### Getting configuration values

The "getters" on a `config` all work in the same way. They never return null, nor do they return a `config_value` with `value_type()` of `NULL`. Instead, they throw `config_exception` if the value is completely absent or set to null. If the value is set to null, a subtype of `config_exception.missing` called `config_exception.null` will be thrown. `config_exception.wrong_type` will be thrown anytime you ask for a type and the value has an incompatible type. Reasonable type conversions are performed for you though.

#### Iteration

If you want to iterate over the contents of a `config`, you can get its `config_object` with `root()`, and then iterate over the `config_object` (which implements `java.util.Map`). Or, you can use `entry_set()` which recurses the object tree for you and builds up a set of all path-value pairs where the value is not null.

### Resolving substitutions

*Substitutions* are the `${foo.bar}` syntax in config files, described in the [specification](#). Resolving substitutions replaces these references with real values.

Before using a `config` it's necessary to call `config#resolve()` to handle substitutions (though `config_factory#load()` and similar methods will do the resolve for you already).

### Merging

The full `config` for your application can be constructed using the associative operation `config#with_fallback(config_me)`. If you use `config_factory#load()` (recommended), it merges system properties over the top of `application.conf` over the top of `reference.conf`, using `with_fallback`. You can add in additional sources of configuration in the same way (usually, custom layers should go either just above or just below `application.conf`, keeping `reference.conf` at the bottom and system properties at the top).

### Serialization

Convert a `config` to a JSON or HOCON string by calling `config_object#render()` on the root object, `my_config.root().render()`. There's also a variant `config_object#render(config_render_options)` which allows you to control the format of the rendered string. (See [config\\_render\\_options](#).) Note that `config` does not remember the formatting of the original file, so if you load, modify, and re-save a config file, it will be substantially reformatted.

As an alternative to `config_object#render()`, the `to_string()` method produces a debug-output-oriented representation (which is not valid JSON).

### This is an interface but don't implement it yourself

*Do not implement `config`*; it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.

Definition at line 172 of file [config.hpp](#).

## 7.7.2 Member Function Documentation

### 7.7.2.1 at\_key()

```
virtual shared_config hocon::config::at_key (
    std::string const & key ) const [virtual]
```

Places the config inside a `config` at the given key.

See also [at\\_path\(\)](#). Note that a key is NOT a path expression (see `config_util#join_path` and `config_util#split_path`).

#### Parameters

<i>key</i>	key to store this config at.
------------	------------------------------

#### Returns

a `config` instance containing this config at the given key.

### 7.7.2.2 `at_path()`

```
virtual shared_config hocon::config::at_path (
    std::string const & path ) const [virtual]
```

Places the config inside another `config` at the given path.

Note that path expressions have a syntax and sometimes require quoting (see `config_util#join_path` and `config_util#split_path`).

#### Parameters

<i>path</i>	path expression to store this config at.
-------------	------------------------------------------

#### Returns

a `config` instance containing this config at the given path.

### 7.7.2.3 `check_valid()`

```
virtual void hocon::config::check_valid (
    shared_config reference,
    std::vector< std::string > restrict_to_paths ) const [virtual]
```

Validates this config against a reference config, throwing an exception if it is invalid.

The purpose of this method is to "fail early" with a comprehensive list of problems; in general, anything this method can find would be detected later when trying to use the config, but it's often more user-friendly to fail right away when loading the config.

Using this method is always optional, since you can "fail late" instead.

You must restrict validation to paths you "own" (those whose meaning are defined by your code module). If you validate globally, you may trigger errors about paths that happen to be in the config but have nothing to do with your module. It's best to allow the modules owning those paths to validate them. Also, if every module validates only its own stuff, there isn't as much redundant work being done.

If no paths are specified in `check_valid()`'s parameter list, validation is for the entire config.

If you specify paths that are not in the reference config, those paths are ignored. (There's nothing to validate.)

Here's what validation involves:



- All paths found in the reference config must be present in this config or an exception will be thrown.
- Some changes in type from the reference config to this config will cause an exception to be thrown. Not all potential type problems are detected, in particular it's assumed that strings are compatible with everything except objects and lists. This is because string types are often "really" some other type (system properties always start out as strings, or a string like "5ms" could be used with `get_milliseconds`). Also, it's allowed to set any type to null or override null with any type.
- Any unresolved substitutions in this config will cause a validation failure; both the reference config and this config should be resolved before validation. If the reference config is unresolved, it's a bug in the caller of this method.

If you want to allow a certain setting to have a flexible type (or otherwise want validation to be looser for some settings), you could either remove the problematic setting from the reference config provided to this method, or you could intercept the validation exception and screen out certain problems. Of course, this will only work if all other callers of this method are careful to restrict validation to their own paths, as they should be.

If validation fails, the thrown exception contains a list of all problems found. The exception will have all the problem concatenated into one huge string.

Again, `check_valid()` can't guess every domain-specific way a setting can be invalid, so some problems may arise later when attempting to use the config. `check_valid()` is limited to reporting generic, but common, problems such as missing settings and blatant type incompatibilities.

#### Parameters

<i>reference</i>	a reference configuration
<i>restrictToPaths</i>	only validate values underneath these paths that your code module owns and understands

#### 7.7.2.4 entry\_set()

```
virtual std::set< std::pair< std::string, std::shared_ptr< const config_value > > > hocon↔
::config::entry_set ( ) const [virtual]
```

Returns the set of path-value pairs, excluding any null values, found by recursing [the root object](#).

Note that this is very different from `root().entry_set()` which returns the set of immediate-child keys in the root object and includes null values.

Entries contain *path expressions* meaning there may be quoting and escaping involved. Parse path expressions with `config_util#split_path`.

Because a `config` is conceptually a single-level map from paths to values, there will not be any `config_object` values in the entries (that is, all entries represent leaf nodes). Use `config_object` rather than `config` if you want a tree. (OK, this is a slight lie: `config` entries may contain `config_list` and the lists may contain objects. But no objects are directly included as entry values.)

#### Returns

set of paths with non-null values, built up by recursing the entire tree of `config_object` and creating an entry for each leaf value.

### 7.7.2.5 get\_duration()

```
virtual int64_t hocon::config::get_duration (
    std::string const & path,
    time_unit unit ) const [virtual]
```

Gets a value as an integer number of the specified units.

If the result would have a fractional part, the number is truncated. Correctly handles durations within the range  $\pm 2^{63}$  seconds.

#### Parameters

<i>path</i>	the path to the time value
<i>unit</i>	the units of the number returned

#### Returns

a 64-bit integer representing the value converted to the requested units

### 7.7.2.6 get\_homogeneous\_unwrapped\_list()

```
template<typename T >
std::vector< T > hocon::config::get_homogeneous_unwrapped_list (
    std::string const & path ) const [inline]
```

Definition at line 578 of file [config.hpp](#).

### 7.7.2.7 get\_is\_null()

```
virtual bool hocon::config::get_is_null (
    std::string const & path ) const [virtual]
```

Checks whether a value is set to null at the given path, but throws an exception if the value is entirely unset.

This method will not throw if `has_path_or_null(string)` returned true for the same path, so to avoid any possible exception check [has\\_path\\_or\\_null\(\)](#) first. However, an exception for unset paths will usually be the right thing (because a `reference.conf` should exist that has the path set, the path should never be unset unless something is broken).

Note that path expressions have a syntax and sometimes require quoting (see [config\\_util#join\\_path](#) and [config\\_util#split\\_path](#)).

#### Parameters

<i>path</i>	the path expression
-------------	---------------------

**Returns**

true if the value exists and is null, false if it exists and is not null

**7.7.2.8 has\_path()**

```
virtual bool hocon::config::has_path (
    std::string const & path ) const [virtual]
```

Checks whether a value is present and non-null at the given path.

This differs in two ways from `Map.containsKey()` as implemented by `config_object`: it looks for a path expression, not a key; and it returns false for null values, while `contains_key()` returns true indicating that the object contains a null value for the key.

If a path exists according to `has_path(string)`, then `get_value(string)` will never throw an exception. However, the typed getters will still throw if the value is not convertible to the requested type.

Note that path expressions have a syntax and sometimes require quoting (see `config_util#join_path` and `config_util#split_path`).

**Parameters**

<i>path</i>	the path expression
-------------	---------------------

**Returns**

true if a non-null value is present at the path

**7.7.2.9 has\_path\_or\_null()**

```
virtual bool hocon::config::has_path_or_null (
    std::string const & path ) const [virtual]
```

Checks whether a value is present at the given path, even if the value is null.

Most of the getters on `config` will throw if you try to get a null value, so if you plan to call `get_value(string)`, `get_int(string)`, or another getter you may want to use plain `has_path(string)` rather than this method.

To handle all three cases (unset, null, and a non-null value) the code might look like:

```
if (config.has_path_or_null(path)) {
    if (config.get_is_null(path)) {
        // handle null setting
    } else {
        // get and use non-null setting
    }
} else {
    // handle entirely unset path
}
```

However, the usual thing is to allow entirely unset paths to be a bug that throws an exception (because you set a default in your `reference.conf`), so in that case it's OK to call `get_is_null(string)` without checking `has_path_or_null` first.

Note that path expressions have a syntax and sometimes require quoting (see `config_util#join_path` and `config_util#split_path`).

#### Parameters

<i>path</i>	the path expression
-------------	---------------------

#### Returns

true if a value is present at the path, even if the value is null

#### 7.7.2.10 `is_empty()`

```
virtual bool hocon::config::is_empty ( ) const [virtual]
```

Returns true if the `Config`'s root object contains no key-value pairs.

#### Returns

true if the configuration is empty

#### 7.7.2.11 `is_resolved()`

```
virtual bool hocon::config::is_resolved ( ) const [virtual]
```

Checks whether the config is completely resolved.

After a successful call to `config#resolve()` it will be completely resolved, but after calling `config#resolve(config_resolved, allow_unresolved)` set in the options, it may or may not be completely resolved. A newly-loaded config may or may not be completely resolved depending on whether there were substitutions present in the file.

#### Returns

true if there are no unresolved substitutions remaining in this configuration.

#### 7.7.2.12 origin()

```
virtual shared_origin hocon::config::origin ( ) const [virtual]
```

Gets the origin of the `Config`, which may be a file, or a file with a line number, or just a descriptive phrase.

##### Returns

the origin of the `Config` for use in error messages

#### 7.7.2.13 parse\_file\_any\_syntax() [1/2]

```
static shared_config hocon::config::parse_file_any_syntax (
    std::string file_basename ) [static]
```

Like `parseFileAnySyntax (File, ConfigParseOptions)` but always uses default parse options.

## Parameters

<i>fileBaseline</i>	a filename with or without extension
---------------------	--------------------------------------

## Returns

the parsed configuration

**7.7.2.14 parse\_file\_any\_syntax()** [2/2]

```
static shared_config hocon::config::parse_file_any_syntax (
    std::string file_basename,
    config_parse_options options ) [static]
```

Parses a file with a flexible extension.

If the *fileBaseline* already ends in a known extension, this method parses it according to that extension (the file's syntax must match its extension). If the *fileBaseline* does not end in an extension, it parses files with all known extensions and merges whatever is found.

In the current implementation, the extension ".conf" forces `ConfigSyntax#CONF`, ".json" forces `ConfigSyntax#JSON`. When merging files, ".conf" falls back to ".json".

Future versions of the implementation may add additional syntaxes or additional extensions. However, the ordering (fallback priority) of the three current extensions will remain the same.

If *options* forces a specific syntax, this method only parses files with an extension matching that syntax.

If *options.getAllowMissing()* is true, then no files have to exist; if false, then at least one file has to exist.

## Parameters

<i>fileBaseline</i>	a filename with or without extension
<i>options</i>	parse options

## Returns

the parsed configuration

**7.7.2.15 parse\_string()** [1/2]

```
static shared_config hocon::config::parse_string (
    std::string s ) [static]
```

Parses a string (which should be valid HOCON or JSON).

## Parameters

<i>s</i>	string to parse
----------	-----------------

## Returns

the parsed configuration

7.7.2.16 `parse_string()` [2/2]

```
static shared_config hocon::config::parse_string (
    std::string s,
    config_parse_options options ) [static]
```

Parses a string (which should be valid HOCON or JSON by default, or the syntax specified in the options otherwise).

## Parameters

<i>s</i>	string to parse
<i>options</i>	parse options

## Returns

the parsed configuration

7.7.2.17 `resolve()` [1/2]

```
virtual shared_config hocon::config::resolve ( ) const [virtual]
```

Returns a replacement config with all substitutions (the `${foo.bar}` syntax, see [the spec](#)) resolved.

Substitutions are looked up using this `config` as the root object, that is, a substitution `${foo.bar}` will be replaced with the result of `get_value("foo.bar")`.

This method uses `config_resolve_options()`, there is another variant `config#resolve(config_resolve_options)` which lets you specify non-default options.

A given `config` must be resolved before using it to retrieve config values, but ideally should be resolved one time for your entire stack of fallbacks (see [config#with\\_fallback](#)). Otherwise, some substitutions that could have resolved with all fallbacks available may not resolve, which will be potentially confusing for your application's users.

`resolve()` should be invoked on root config objects, rather than on a subtree (a subtree is the result of something like `config.get_config("foo")`). The problem with `resolve()` on a subtree is that substitutions are relative to the root of the config and the subtree will have no way to get values from the root. For example, if you did `config.get_config("foo").resolve()` on the below config file, it would not work:

```
common-value = 10
foo {
  whatever = ${common-value}
}
```

Many methods on `config_factory` such as `config_factory#load()` automatically resolve the loaded `config` on the loaded stack of config files.

Resolving an already-resolved config is a harmless no-op, but again, it is best to resolve an entire stack of fallbacks (such as all your config files combined) rather than resolving each one individually.

#### Returns

an immutable object with substitutions resolved

#### 7.7.2.18 `resolve()` [2/2]

```
virtual shared_config hocon::config::resolve (
    config_resolve_options options ) const [virtual]
```

Like `config#resolve()` but allows you to specify non-default options.

#### Parameters

<i>options</i>	resolve options
----------------	-----------------

#### Returns

the resolved `config` (may be only partially resolved if options are set to allow unresolved)

#### 7.7.2.19 `resolve_with()` [1/2]

```
virtual shared_config hocon::config::resolve_with (
    shared_config source ) const [virtual]
```

Like `config#resolve()` except that substitution values are looked up in the given source, rather than in this instance.

This is a special-purpose method which doesn't make sense to use in most cases; it's only needed if you're constructing some sort of app-specific custom approach to configuration. The more usual approach if you have a source of substitution values would be to merge that source into your config stack using `config#withFallback` and then resolve.

Note that this method does NOT look in this instance for substitution values. If you want to do that, you could either merge this instance into your value source using `config#with_fallback`, or you could resolve multiple times with multiple sources (using `config_resolve_options#setAllowUnresolved(boolean)` so the partial resolves don't fail).



## Parameters

<i>source</i>	configuration to pull values from
---------------	-----------------------------------

## Returns

an immutable object with substitutions resolved

**7.7.2.20 resolve\_with() [2/2]**

```
virtual shared_config hocon::config::resolve_with (
    shared_config source,
    config_resolve_options options ) const [virtual]
```

Like `config#resolve_with(config)` but allows you to specify non-default options.

## Parameters

<i>source</i>	source configuration to pull values from
<i>options</i>	resolve options

## Returns

the resolved `config` (may be only partially resolved if options are set to allow unresolved)

**7.7.2.21 root()**

```
virtual shared_object hocon::config::root ( ) const [virtual]
```

Gets the `Config` as a tree of `ConfigObject`.

This is a constant-time operation (it is not proportional to the number of values in the `Config`).

## Returns

the root object in the configuration

**7.7.2.22 to\_fallback\_value()**

```
shared_value hocon::config::to_fallback_value ( ) const [override], [virtual]
```

Converts a `config` to its root object and a `config_value` to itself.

Originally in the `MergeableValue` interface, squashing to ease C++ public API separation

Implements `hocon::config_mergeable`.

### 7.7.2.23 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

#### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

#### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.7.2.24 with\_only\_path()

```
virtual shared_config hocon::config::with_only_path (
    std::string const & path ) const [virtual]
```

Clone the config with only the given path (and its children) retained; all sibling paths are removed.

Note that path expressions have a syntax and sometimes require quoting (see `config_util#join_path` and `config_util#split_path`).

**Parameters**

<i>path</i>	path to keep
-------------	--------------

**Returns**

a copy of the config minus all paths except the one specified

**7.7.2.25 with\_value()**

```
virtual shared_config hocon::config::with_value (
    std::string const & path,
    std::shared_ptr< const config_value > value ) const [virtual]
```

Returns a `config` based on this one, but with the given path set to the given value.

Does not modify this instance (since it's immutable). If the path already has a value, that value is replaced. To remove a value, use `withoutPath()`.

Note that path expressions have a syntax and sometimes require quoting (see `config_util#join_path` and `config_util#split_path`).

**Parameters**

<i>path</i>	path expression for the value's new location
<i>value</i>	value at the new path

**Returns**

the new instance with the new map entry

**7.7.2.26 without\_path()**

```
virtual shared_config hocon::config::without_path (
    std::string const & path ) const [virtual]
```

Clone the config with the given path removed.

Note that path expressions have a syntax and sometimes require quoting (see `config_util#join_path` and `config_util#split_path`).

**Parameters**

<i>path</i>	path expression to remove
-------------	---------------------------

**Returns**

a copy of the config minus the specified path

### 7.7.3 Friends And Related Function Documentation

#### 7.7.3.1 config\_object

```
friend class config_object [friend]
```

Definition at line 173 of file [config.hpp](#).

#### 7.7.3.2 config\_parseable

```
friend class config_parseable [friend]
```

Definition at line 175 of file [config.hpp](#).

#### 7.7.3.3 config\_value

```
friend class config_value [friend]
```

Definition at line 174 of file [config.hpp](#).

#### 7.7.3.4 parseable

```
friend class parseable [friend]
```


Definition at line 176 of file [config.hpp](#).

The documentation for this class was generated from the following file:

- [hocon/config.hpp](#)

## 7.8 hocon::config\_boolean Class Reference

Inheritance diagram for hocon::config\_boolean:

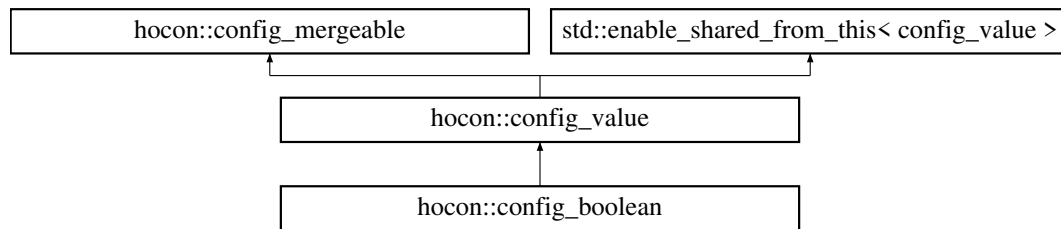

### Public Types

- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }  
*The type of a configuration value (following the `JSON` type schema).*

### Public Member Functions

- `config_boolean` (shared\_origin `origin`, bool `value`)
- `config_value::type value_type` () const override  
*The type of the value; matches the JSON type schema.*
- `std::string transform_to_string` () const override
- `unwrapped_value unwrapped` () const override
- bool `bool_value` () const
- bool `operator==` (config\_value const &other) const override
- virtual shared\_origin const & `origin` () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* `value_type_name` () const  
*The printable name of the value type.*
- virtual std::string `render` () const  
*Renders the config value as a HOCON string.*
- virtual std::string `render` (config\_render\_options options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config `at_key` (std::string const &key) const  
*Places the value inside a `config` at the given key.*
- shared\_config `at_path` (std::string const &path\_expression) const  
*Places the value inside a `config` at the given path.*
- virtual shared\_value `with_origin` (shared\_origin `origin`) const  
*Returns a `config_value` based on this one, but with the given origin.*
- virtual shared\_value `relativized` (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status `get_resolve_status` () const
- std::shared\_ptr< const config\_mergeable > `with_fallback` (std::shared\_ptr< const config\_mergeable > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*

## Static Public Member Functions

- static char const \* [type\\_name](#) (type t)

## Protected Member Functions

- shared\_value [new\\_copy](#) (shared\_origin) const override
- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const
- virtual void **render** (std::string &result, int indent, bool at\_root, [config\\_render\\_options](#) options) const
- shared\_config **at\_key** (shared\_origin [origin](#), std::string const &key) const
- shared\_config **at\_path** (shared\_origin [origin](#), [path](#) raw\_path) const
- virtual [resolve\\_result](#)< shared\_value > **resolve\_substitutions** ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual bool **ignores\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin [origin](#), std::vector< shared\_value > stack) const
- shared\_value [to\\_fallback\\_value](#) () const override

*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool [equals](#) ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.8.1 Detailed Description

Definition at line 7 of file [config\\_boolean.hpp](#).

### 7.8.2 Member Enumeration Documentation

### 7.8.2.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

## 7.8.3 Member Function Documentation

### 7.8.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also [config\\_value#at\\_path\(string\)](#).

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a [config](#) instance containing this value at the given key.

### 7.8.3.2 at\_path()

```
shared_config hocon::config_value::at_path (  
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also [config\\_value#at\\_key\(String\)](#).

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a [config](#) instance containing this value at the given path.



### 7.8.3.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

### 7.8.3.4 new\_copy()

```
shared_value hocon::config_boolean::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.8.3.5 operator==( )

```
bool hocon::config_boolean::operator==(
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.8.3.6 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.8.3.7 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at `foo.bar` in the parent, and the included file as a substitution `$(a.b.c)`, the included substitution now needs to be `$(foo.bar.a.b.c)` because we resolve substitutions globally only after parsing everything.

**Parameters**

<i>prefix</i>	
---------------	--

**Returns**

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.8.3.8 render() [1/2]**

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.8.3.9 render() [2/2]**

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.8.3.10 to\_fallback\_value()**

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual], [inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

**7.8.3.11 transform\_to\_string()**

```
std::string hocon::config_boolean::transform_to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.8.3.12 type\_name()**

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

**7.8.3.13 unwrapped()**

```
unwrapped_value hocon::config_boolean::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.8.3.14 value\_type()

```
config_value::type hocon::config_boolean::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implements [hocon::config\\_value](#).

#### 7.8.3.15 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

##### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

#### 7.8.3.16 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

## 7.8.3.17 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

The documentation for this class was generated from the following file:


- internal/values/config\_boolean.hpp

## 7.9 hocon::config\_concatenation Class Reference

A ConfigConcatenation represents a list of values to be concatenated (see the spec).

```
#include <config_concatenation.hpp>
```

Inheritance diagram for `hocon::config_concatenation`:



## Public Types

- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

The type of a configuration value (following the `JSON` type schema).

## Public Member Functions

- `config_concatenation` (shared\_origin `origin`, std::vector< shared\_value > pieces)
- `config_value::type value_type` () const override  
The type of the value; matches the JSON type schema.
- std::vector< shared\_value > `unmerged_values` () const override
- resolve\_status `get_resolve_status` () const override
- shared\_value `replace_child` (shared\_value const &child, shared\_value replacement) const override  
Replace a child of this value.
- bool `has_descendant` (shared\_value const &descendant) const override  
Super-expensive full traversal to see if descendant is anywhere underneath this container.
- `resolve_result`< shared\_value > `resolve_substitutions` (`resolve_context` const &context, `resolve_source` const &source) const override
- shared\_value `relativized` (std::string prefix) const override  
This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.
- unwrapped\_value `unwrapped` () const override
- bool `operator==` (`config_value` const &other) const override
- virtual shared\_origin const & `origin` () const  
The origin of the value (file, line number, etc.), for debugging and error messages.
- char const \* `value_type_name` () const  
The printable name of the value type.
- virtual std::string `render` () const  
Renders the config value as a HOCON string.
- virtual std::string `render` (`config_render_options` options) const  
Renders the config value to a string, using the provided options.
- shared\_config `at_key` (std::string const &key) const  
Places the value inside a `config` at the given key.
- shared\_config `at_path` (std::string const &path\_expression) const  
Places the value inside a `config` at the given path.
- virtual shared\_value `with_origin` (shared\_origin `origin`) const  
Returns a `config_value` based on this one, but with the given origin.
- std::shared\_ptr< const `config_mergeable` > `with_fallback` (std::shared\_ptr< const `config_mergeable` > other) const override  
Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.
- virtual std::string `transform_to_string` () const

## Static Public Member Functions

- static std::vector< shared\_value > `consolidate` (std::vector< shared\_value > pieces)
- static shared\_value `concatenate` (std::vector< shared\_value > pieces)
- static char const \* `type_name` (type t)

## Protected Member Functions

- shared\_value [new\\_copy](#) (shared\_origin [origin](#)) const override
- bool [ignores\\_fallbacks](#) () const override
- void [render](#) (std::string &result, int indent, bool at\_root, [config\\_render\\_options](#) options) const override
- virtual void [render](#) (std::string &result, int indent, bool at\_root, std::string const &[at\\_key](#), [config\\_render\\_options](#) options) const
- shared\_config [at\\_key](#) (shared\_origin [origin](#), std::string const &key) const
- shared\_config [at\\_path](#) (shared\_origin [origin](#), [path](#) raw\_path) const
- void [require\\_not\\_ignoring\\_fallbacks](#) () const
- virtual shared\_value [with\\_fallbacks\\_ignored](#) () const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_object](#) (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value [merged\\_with\\_object](#) (shared\_object fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (shared\_value fallback) const
- virtual shared\_value [construct\\_delayed\\_merge](#) (shared\_origin [origin](#), std::vector< shared\_value > stack) const
- shared\_value [to\\_fallback\\_value](#) () const override

*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void [indent](#) (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > [replace\\_child\\_in\\_list](#) (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool [has\\_descendant\\_in\\_list](#) (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool [equals](#) ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.9.1 Detailed Description

A ConfigConcatenation represents a list of values to be concatenated (see the spec).

It only has to exist if at least one value is an unresolved substitution, otherwise we could go ahead and collapse the list into a single value.

Right now this is always a list of strings and `${}` references, but in the future should support a list of ConfigList. We may also support concatenations of objects, but ConfigDelayedMerge should be used for that since a concat of objects really will merge, not concatenate.

Definition at line 24 of file [config\\_concatenation.hpp](#).

### 7.9.2 Member Enumeration Documentation

### 7.9.2.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

## 7.9.3 Member Function Documentation

### 7.9.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also [config\\_value#at\\_path\(string\)](#).

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a [config](#) instance containing this value at the given key.

### 7.9.3.2 at\_path()

```
shared_config hocon::config_value::at_path (  
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also [config\\_value#at\\_key\(String\)](#).

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a [config](#) instance containing this value at the given path.



### 7.9.3.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

### 7.9.3.4 get\_resolve\_status()

```
resolve_status hocon::config_concatenation::get_resolve_status ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

### 7.9.3.5 has\_descendant()

```
bool hocon::config_concatenation::has_descendant (
    shared_value const & descendant ) const [override], [virtual]
```

Super-expensive full traversal to see if descendant is anywhere underneath this container.

Implements [hocon::container](#).

### 7.9.3.6 ignores\_fallbacks()

```
bool hocon::config_concatenation::ignores_fallbacks ( ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

### 7.9.3.7 new\_copy()

```
shared_value hocon::config_concatenation::new_copy (
    shared_origin origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.9.3.8 operator==( )

```
bool hocon::config_concatenation::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.9.3.9 origin( )

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.9.3.10 relativized( )

```
shared_value hocon::config_concatenation::relativized (
    std::string prefix ) const [override], [virtual]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at `foo.bar` in the parent, and the included file as a substitution `${a.b.c}`, the included substitution now needs to be `${foo.bar.a.b.c}` because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented from [hocon::config\\_value](#).

### 7.9.3.11 render() [1/3]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

#### Returns

the rendered value

#### 7.9.3.12 render() [2/3]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

#### Parameters

<i>options</i>	the rendering options
----------------	-----------------------

#### Returns

the rendered value

#### 7.9.3.13 render() [3/3]

```
void hocon::config_concatenation::render (
    std::string & result,
    int indent,
    bool at_root,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.9.3.14 `replace_child()`

```
shared_value hocon::config_concatenation::replace_child (
    shared_value const & child,
    shared_value replacement ) const [override], [virtual]
```

Replace a child of this value.

CAUTION if replacement is null, delete the child, which may also delete the parent, or make the parent into a non-container.

Implements [hocon::container](#).

#### 7.9.3.15 `resolve_substitutions()`

```
resolve_result< shared_value > hocon::config_concatenation::resolve_substitutions (
    resolve_context const & context,
    resolve_source const & source ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.9.3.16 `to_fallback_value()`

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.9.3.17 `type_name()`

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

### 7.9.3.18 unmerged\_values()

```
std::vector< shared_value > hocon::config_concatenation::unmerged_values ( ) const [override],  
[virtual]
```

Implements [hocon::unmergeable](#).

### 7.9.3.19 unwrapped()

```
unwrapped_value hocon::config_concatenation::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.9.3.20 value\_type()

```
config_value::type hocon::config_concatenation::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

#### Returns

value's type

Implements [hocon::config\\_value](#).

### 7.9.3.21 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

#### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.9.3.22 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

#### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

#### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.9.3.23 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns


the new `config_value` with the given origin

The documentation for this class was generated from the following file:

- `internal/values/config_concatenation.hpp`

## 7.10 hocon::config\_delayed\_merge Class Reference

Inheritance diagram for `hocon::config_delayed_merge`:



### Public Types

- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the `JSON` type schema).*

### Public Member Functions

- `config_delayed_merge` (shared\_origin `origin`, std::vector< shared\_value > stack)
- `config_value::type value_type` () const override  
*The type of the value; matches the JSON type schema.*
- shared\_value `make_replacement` (resolve\_context const &context, int skipping) const override
- std::vector< shared\_value > `unmerged_values` () const override
- unwrapped\_value `unwrapped` () const override
- `resolve_result`< shared\_value > `resolve_substitutions` (resolve\_context const &context, resolve\_source const &source) const override
- resolve\_status `get_resolve_status` () const override
- bool `operator==` (config\_value const &other) const override
- shared\_value `replace_child` (shared\_value const &child, shared\_value replacement) const override  
*Replace a child of this value.*
- bool `has_descendant` (shared\_value const &descendant) const override  
*Super-expensive full traversal to see if descendant is anywhere underneath this container.*
- virtual shared\_origin const & `origin` () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* `value_type_name` () const  
*The printable name of the value type.*



- virtual std::string **render** () const  
*Renders the config value as a HOCON string.*
- virtual std::string **render** (config\_render\_options options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config **at\_key** (std::string const &key) const  
*Places the value inside a `config` at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const  
*Places the value inside a `config` at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin origin) const  
*Returns a `config_value` based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- std::shared\_ptr< const config\_mergeable > **with\_fallback** (std::shared\_ptr< const config\_mergeable > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- virtual std::string **transform\_to\_string** () const

## Static Public Member Functions

- static shared\_value **make\_replacement** (resolve\_context const &context, std::vector< shared\_value > stack, int skipping)
- static resolve\_result< shared\_value > **resolve\_substitutions** (std::shared\_ptr< const replaceable\_merge\_stack > replaceable, const std::vector< shared\_value > &\_stack, resolve\_context const &context, resolve\_source const &source)
- static void **render** (std::vector< shared\_value > const &stack, std::string &s, int indent\_value, bool at\_root, std::string const &at\_key, config\_render\_options options)
- static char const \* **type\_name** (type t)

## Protected Member Functions

- shared\_value **new\_copy** (shared\_origin) const override
- bool **ignores\_fallbacks** () const override
- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, config\_render\_options options) const override
- virtual void **render** (std::string &result, int indent, bool at\_root, config\_render\_options options) const override
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const
- shared\_config **at\_path** (shared\_origin origin, path raw\_path) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin origin, std::vector< shared\_value > stack) const
- shared\_value **to\_fallback\_value** () const override  
*Converts a config to its root object and a `config_value` to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.10.1 Detailed Description

Definition at line 11 of file [config\\_delayed\\_merge.hpp](#).

### 7.10.2 Member Enumeration Documentation

#### 7.10.2.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.10.3 Member Function Documentation

#### 7.10.3.1 at\_key()

```
shared_config hocon::config_value::at_key (
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a `config` instance containing this value at the given key.

### 7.10.3.2 at\_path()

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also `config_value#at_key(String)`.

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a `config` instance containing this value at the given path.

### 7.10.3.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

### 7.10.3.4 get\_resolve\_status()

```
resolve_status hocon::config_delayed_merge::get_resolve_status ( ) const [inline], [override],
[virtual]
```

Reimplemented from [hocon::config\\_value](#).

Definition at line 30 of file [config\\_delayed\\_merge.hpp](#).

### 7.10.3.5 has\_descendant()

```
bool hocon::config_delayed_merge::has_descendant (
    shared_value const & descendant ) const [override], [virtual]
```

Super-expensive full traversal to see if descendant is anywhere underneath this container.

Implements [hocon::container](#).

### 7.10.3.6 ignores\_fallbacks()

```
bool hocon::config_delayed_merge::ignores_fallbacks ( ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

### 7.10.3.7 make\_replacement()

```
shared_value hocon::config_delayed_merge::make_replacement (
    resolve_context const & context,
    int skipping ) const [override], [virtual]
```

Implements [hocon::replaceable\\_merge\\_stack](#).

### 7.10.3.8 new\_copy()

```
shared_value hocon::config_delayed_merge::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.10.3.9 operator==( )

```
bool hocon::config_delayed_merge::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.10.3.10 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.10.3.11 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at `foo.bar` in the parent, and the included file as a substitution `$(a.b.c)`, the included substitution now needs to be `$(foo.bar.a.b.c)` because we resolve substitutions globally only after parsing everything.

## Parameters

<i>prefix</i>	
---------------	--

## Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.10.3.12 render() [1/4]**

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

## Returns

the rendered value

**7.10.3.13 render() [2/4]**

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

## Parameters

<i>options</i>	the rendering options
----------------	-----------------------

## Returns

the rendered value

**7.10.3.14 render() [3/4]**

```
virtual void hocon::config_delayed_merge::render (
    std::string & result,
    int indent,
    bool at_root,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.10.3.15 render() [4/4]**

```
virtual void hocon::config_delayed_merge::render (
    std::string & result,
    int indent,
    bool at_root,
    std::string const & at_key,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.10.3.16 replace\_child()**

```
shared_value hocon::config_delayed_merge::replace_child (
    shared_value const & child,
    shared_value replacement ) const [override], [virtual]
```

Replace a child of this value.

CAUTION if replacement is null, delete the child, which may also delete the parent, or make the parent into a non-container.

Implements [hocon::container](#).

### 7.10.3.17 resolve\_substitutions()

```
resolve_result< shared_value > hocon::config_delayed_merge::resolve_substitutions (
    resolve_context const & context,
    resolve_source const & source ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

### 7.10.3.18 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

### 7.10.3.19 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

### 7.10.3.20 unmerged\_values()

```
std::vector< shared_value > hocon::config_delayed_merge::unmerged_values ( ) const [override],
[virtual]
```

Implements [hocon::unmergeable](#).

### 7.10.3.21 unwrapped()

```
unwrapped_value hocon::config_delayed_merge::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.10.3.22 value\_type()

```
config_value::type hocon::config_delayed_merge::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

#### Returns

value's type

Implements [hocon::config\\_value](#).

### 7.10.3.23 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

#### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.10.3.24 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.



## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

## 7.10.3.25 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns


the new [config\\_value](#) with the given origin

The documentation for this class was generated from the following file:

- internal/values/config\_delayed\_merge.hpp

## 7.11 hocon::config\_delayed\_merge\_object Class Reference

Inheritance diagram for `hocon::config_delayed_merge_object`:

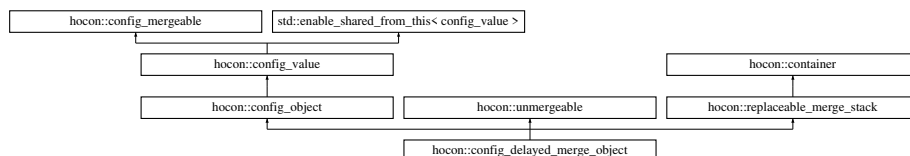

## Public Types

- using `iterator` = `std::unordered_map< std::string, shared_value >::const_iterator`
- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

## Public Member Functions

- **config\_delayed\_merge\_object** (shared\_origin [origin](#), std::vector< shared\_value > const &stack)
- **resolve\_result**< shared\_value > **resolve\_substitutions** ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const override
- std::vector< shared\_value > **unmerged\_values** () const override
- shared\_value **make\_replacement** ([resolve\\_context](#) const &context, int skipping) const override
- shared\_object **with\_value** ([path](#) raw\_path, shared\_value [value](#)) const override
- shared\_object **with\_value** (std::string key, shared\_value [value](#)) const override
- resolve\_status **get\_resolve\_status** () const override
- std::vector< std::string > **key\_set** () const override
 

*Construct a list of keys in the \_value map.*
- bool **is\_empty** () const override
- size\_t **size** () const override
- shared\_value **operator[]** (std::string const &key) const override
- shared\_value **get** (std::string const &key) const override
- iterator **begin** () const override
- iterator **end** () const override
- unwrapped\_value **unwrapped** () const override
- bool **operator==** ([config\\_value](#) const &other) const override
- shared\_value **replace\_child** (shared\_value const &child, shared\_value replacement) const override
 

*Replace a child of this value.*
- bool **has\_descendant** (shared\_value const &descendant) const override
 

*Super-expensive full traversal to see if descendant is anywhere underneath this container.*
- virtual std::shared\_ptr< const [config](#) > **to\_config** () const
 

*Converts this object to a Config instance, enabling you to use path expressions to find values in the object.*
- **config\_value::type** **value\_type** () const override
 

*The type of the value; matches the JSON type schema.*
- virtual shared\_origin const & **origin** () const
 

*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* **value\_type\_name** () const
 

*The printable name of the value type.*
- virtual std::string **render** () const
 

*Renders the config value as a HOCON string.*
- virtual std::string **render** ([config\\_render\\_options](#) options) const
 

*Renders the config value to a string, using the provided options.*
- shared\_config **at\_key** (std::string const &key) const
 

*Places the value inside a config at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const
 

*Places the value inside a config at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin [origin](#)) const
 

*Returns a config\_value based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const
 

*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- std::shared\_ptr< const [config\\_mergeable](#) > **with\_fallback** (std::shared\_ptr< const [config\\_mergeable](#) > other) const override
 

*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- virtual std::string **transform\_to\_string** () const

## Static Public Member Functions

- static char const \* [type\\_name](#) (type t)

## Protected Member Functions

- shared\_value [attempt\\_peek\\_with\\_partial\\_resolve](#) (std::string const &key) const override  
*Look up the key on an only-partially-resolved object, with no transformation or type conversion of any kind; if 'this' is not resolved then try to look up the key anyway if possible.*
- std::unordered\_map< std::string, shared\_value > const & [entry\\_set](#) () const override
- shared\_object [without\\_path](#) (path raw\_path) const override
- shared\_object [with\\_only\\_path](#) (path raw\_path) const override
- shared\_object [with\\_only\\_path\\_or\\_null](#) (path raw\_path) const override
- shared\_object [new\\_copy](#) (resolve\_status const &status, shared\_origin [origin](#)) const override
- bool [ignores\\_fallbacks](#) () const override
- virtual void [render](#) (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const override
- virtual void [render](#) (std::string &result, int indent, bool at\_root, [config\\_render\\_options](#) options) const override
- shared\_value [peek\\_path](#) (path desired\_path) const
- shared\_value [peek\\_assuming\\_resolved](#) (std::string const &key, path original\_path) const
- shared\_value [new\\_copy](#) (shared\_origin [origin](#)) const override
- shared\_value [construct\\_delayed\\_merge](#) (shared\_origin [origin](#), std::vector< shared\_value > stack) const override
- shared\_config [at\\_key](#) (shared\_origin [origin](#), std::string const &key) const
- shared\_config [at\\_path](#) (shared\_origin [origin](#), path raw\_path) const
- void [require\\_not\\_ignoring\\_fallbacks](#) () const
- virtual shared\_value [with\\_fallbacks\\_ignored](#) () const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_object](#) (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value [merged\\_with\\_object](#) (shared\_object fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (shared\_value fallback) const
- shared\_value [to\\_fallback\\_value](#) () const override  
*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static shared\_value [peek\\_path](#) (const [config\\_object](#) \*self, path desired\_path)
- static shared\_origin [merge\\_origins](#) (std::vector< shared\_value > const &stack)
- static void [indent](#) (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > [replace\\_child\\_in\\_list](#) (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool [has\\_descendant\\_in\\_list](#) (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool [equals](#) ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.11.1 Detailed Description

Definition at line 10 of file [config\\_delayed\\_merge\\_object.hpp](#).

## 7.11.2 Member Typedef Documentation

### 7.11.2.1 iterator

```
using hocon::config_object::iterator = std::unordered_map<std::string, shared_value>::const_iterator [inherited]
```

Definition at line 55 of file [config\\_object.hpp](#).

## 7.11.3 Member Enumeration Documentation

### 7.11.3.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

## 7.11.4 Member Function Documentation

### 7.11.4.1 at\_key()

```
shared_config hocon::config_value::at_key (
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a `config` instance containing this value at the given key.

#### 7.11.4.2 at\_path()

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also `config_value#at_key(String)`.

##### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

##### Returns

a `config` instance containing this value at the given path.

#### 7.11.4.3 attempt\_peek\_with\_partial\_resolve()

```
shared_value hocon::config_delayed_merge_object::attempt_peek_with_partial_resolve (
    std::string const & key ) const [override], [protected], [virtual]
```

Look up the key on an only-partially-resolved object, with no transformation or type conversion of any kind; if 'this' is not resolved then try to look up the key anyway if possible.

##### Parameters

<i>key</i>	key to look up
------------	----------------

##### Returns

the value of the key, or null if known not to exist

##### Exceptions

<a href="#">config_exception</a>	if can't figure out key's value (or existence) without more resolving
----------------------------------	-----------------------------------------------------------------------

Implements [hocon::config\\_object](#).

#### 7.11.4.4 begin()

```
iterator hocon::config_delayed_merge_object::begin ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 30 of file [config\\_delayed\\_merge\\_object.hpp](#).

#### 7.11.4.5 `construct_delayed_merge()`

```
shared_value hocon::config_object::construct_delayed_merge (
    shared_origin origin,
    std::vector< shared_value > stack ) const [override], [protected], [virtual],
[inherited]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.11.4.6 `end()`

```
iterator hocon::config_delayed_merge_object::end ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 31 of file [config\\_delayed\\_merge\\_object.hpp](#).

#### 7.11.4.7 `entry_set()`

```
std::unordered_map< std::string, shared_value > const & hocon::config_delayed_merge_object↵
::entry_set ( ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_object](#).

#### 7.11.4.8 `equals()`

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

#### 7.11.4.9 `get()`

```
shared_value hocon::config_delayed_merge_object::get (
    std::string const & key ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 29 of file [config\\_delayed\\_merge\\_object.hpp](#).

#### 7.11.4.10 get\_resolve\_status()

```
resolve_status hocon::config_delayed_merge_object::get_resolve_status ( ) const [inline],  
[override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

Definition at line 21 of file [config\\_delayed\\_merge\\_object.hpp](#).

#### 7.11.4.11 has\_descendant()

```
bool hocon::config_delayed_merge_object::has_descendant (  
    shared_value const & descendant ) const [override], [virtual]
```

Super-expensive full traversal to see if descendant is anywhere underneath this container.

Implements [hocon::container](#).

#### 7.11.4.12 ignores\_fallbacks()

```
bool hocon::config_delayed_merge_object::ignores_fallbacks ( ) const [override], [protected],  
[virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.11.4.13 is\_empty()

```
bool hocon::config_delayed_merge_object::is_empty ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 26 of file [config\\_delayed\\_merge\\_object.hpp](#).

#### 7.11.4.14 key\_set()

```
std::vector< std::string > hocon::config_delayed_merge_object::key_set ( ) const [inline],  
[override], [virtual]
```

Construct a list of keys in the `_value` map.

Use a vector rather than set, because most of the time we just want to iterate over them.

Implements [hocon::config\\_object](#).

Definition at line 23 of file [config\\_delayed\\_merge\\_object.hpp](#).

#### 7.11.4.15 make\_replacement()

```
shared_value hocon::config_delayed_merge_object::make_replacement (
    resolve_context const & context,
    int skipping ) const [override], [virtual]
```

Implements [hocon::replaceable\\_merge\\_stack](#).

#### 7.11.4.16 new\_copy() [1/2]

```
shared_object hocon::config_delayed_merge_object::new_copy (
    resolve_status const & status,
    shared_origin origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_object](#).

#### 7.11.4.17 new\_copy() [2/2]

```
shared_value hocon::config_object::new_copy (
    shared_origin origin ) const [override], [protected], [virtual], [inherited]
```

Implements [hocon::config\\_value](#).

#### 7.11.4.18 operator==( )

```
bool hocon::config_delayed_merge_object::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.11.4.19 operator[]( )

```
shared_value hocon::config_delayed_merge_object::operator[] (
    std::string const & key ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 28 of file [config\\_delayed\\_merge\\_object.hpp](#).



#### 7.11.4.20 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

##### Returns

where the value came from

#### 7.11.4.21 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

##### Parameters

<i>prefix</i>	
---------------	--

##### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

#### 7.11.4.22 render() [1/4]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

##### Returns

the rendered value

**7.11.4.23 render() [2/4]**

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.11.4.24 render() [3/4]**

```
virtual void hocon::config_delayed_merge_object::render (
    std::string & result,
    int indent,
    bool at_root,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.11.4.25 render() [4/4]**

```
virtual void hocon::config_delayed_merge_object::render (
    std::string & result,
    int indent,
    bool at_root,
    std::string const & at_key,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.11.4.26 replace\_child()

```
shared_value hocon::config_delayed_merge_object::replace_child (
    shared_value const & child,
    shared_value replacement ) const [override], [virtual]
```

Replace a child of this value.

CAUTION if replacement is null, delete the child, which may also delete the parent, or make the parent into a non-container.

Implements [hocon::container](#).

#### 7.11.4.27 resolve\_substitutions()

```
resolve_result< shared_value > hocon::config_delayed_merge_object::resolve_substitutions (
    resolve_context const & context,
    resolve_source const & source ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.11.4.28 size()

```
size_t hocon::config_delayed_merge_object::size ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 27 of file [config\\_delayed\\_merge\\_object.hpp](#).

#### 7.11.4.29 to\_config()

```
virtual std::shared_ptr< const config > hocon::config_object::to_config ( ) const [virtual],
[inherited]
```

Converts this object to a `Config` instance, enabling you to use path expressions to find values in the object.

This is a constant-time operation (it is not proportional to the size of the object).

##### Returns

a `Config` with this object as its root

#### 7.11.4.30 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const  [override], [protected], [virtual],  
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.11.4.31 type\_name()

```
static char const * hocon::config_value::type_name (   
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.11.4.32 unmerged\_values()

```
std::vector< shared_value > hocon::config_delayed_merge_object::unmerged_values ( ) const  
[override], [virtual]
```

Implements [hocon::unmergeable](#).

#### 7.11.4.33 unwrapped()

```
unwrapped_value hocon::config_delayed_merge_object::unwrapped ( ) const  [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.11.4.34 value\_type()

```
config_value::type hocon::config_object::value_type ( ) const  [override], [virtual], [inherited]
```

The type of the value; matches the JSON type schema.

Returns

value's type

Implements [hocon::config\\_value](#).

## 7.11.4.35 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

## Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

## 7.11.4.36 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

**7.11.4.37 with\_only\_path()**

```
shared_object hocon::config_delayed_merge_object::with_only_path (
    path raw_path ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_object](#).

**7.11.4.38 with\_only\_path\_or\_null()**

```
shared_object hocon::config_delayed_merge_object::with_only_path_or_null (
    path raw_path ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_object](#).

**7.11.4.39 with\_origin()**

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

**7.11.4.40 with\_value() [1/2]**

```
shared_object hocon::config_delayed_merge_object::with_value (
    path raw_path,
    shared_value value ) const [override], [virtual]
```

Implements [hocon::config\\_object](#).

**7.11.4.41 with\_value() [2/2]**

```
shared_object hocon::config_delayed_merge_object::with_value (
    std::string key,
    shared_value value ) const [override], [virtual]
```

Implements [hocon::config\\_object](#).

**7.11.4.42 without\_path()**

```
shared_object hocon::config_delayed_merge_object::without_path (
    path raw_path ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_object](#).

The documentation for this class was generated from the following file:


- internal/values/config\_delayed\_merge\_object.hpp

**7.12 hocon::config\_document Class Reference**

Represents an individual HOCON or JSON file, preserving all formatting and syntax details.

```
#include <config_document.hpp>
```

Inheritance diagram for `hocon::config_document`:



## Public Member Functions

- virtual std::unique\_ptr< [config\\_document](#) > [with\\_value\\_text](#) (std::string [path](#), std::string newValue) const =0  
*Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.*
- virtual std::unique\_ptr< [config\\_document](#) > [with\\_value](#) (std::string [path](#), std::shared\_ptr< [config\\_value](#) > new\_value) const =0  
*Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.*
- virtual std::unique\_ptr< [config\\_document](#) > [without\\_path](#) (std::string [path](#)) const =0  
*Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with all values at the desired path removed.*
- virtual bool [has\\_path](#) (std::string const &[path](#)) const =0  
*Returns a boolean indicating whether or not a [config\\_document](#) has a value at the desired path.*
- virtual std::string [render](#) () const =0  
*The original text of the input, modified if necessary with any replaced or added values.*

### 7.12.1 Detailed Description

Represents an individual HOCON or JSON file, preserving all formatting and syntax details.

This can be used to replace individual values and exactly render the original text of the input.

Because this object is immutable, it is safe to use from multiple threads and there's no need for "defensive copies."

*Do not implement interface [config\\_document](#)*; it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.

Definition at line 26 of file [config\\_document.hpp](#).

### 7.12.2 Member Function Documentation

#### 7.12.2.1 [has\\_path\(\)](#)

```
virtual bool hocon::config_document::has_path (
    std::string const & path ) const    [pure virtual]
```

Returns a boolean indicating whether or not a [config\\_document](#) has a value at the desired path.

null counts as a value for purposes of this check.

#### Parameters

<i>path</i>	the path to check
-------------	-------------------



**Returns**

true if the path exists in the document, otherwise false

Implemented in [hocon::simple\\_config\\_document](#).

**7.12.2.2 render()**

```
virtual std::string hocon::config_document::render ( ) const [pure virtual]
```

The original text of the input, modified if necessary with any replaced or added values.

**Returns**

the modified original text

Implemented in [hocon::simple\\_config\\_document](#).

**7.12.2.3 with\_value()**

```
virtual std::unique_ptr< config_document > hocon::config_document::with_value (
    std::string path,
    std::shared_ptr< config_value > new_value ) const [pure virtual]
```

Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.

Works like `with_value_text(string, string)`, but takes a [config\\_value](#) instead of a string.

**Parameters**

<i>path</i>	the path at which to set the desired value
<i>new_value</i>	the value to set at the desired path, represented as a ConfigValue. The rendered text of the ConfigValue will be inserted into the <a href="#">config_document</a> .

**Returns**

a copy of the [config\\_document](#) with the desired value at the desired path

Implemented in [hocon::simple\\_config\\_document](#).

**7.12.2.4 with\_value\_text()**

```
virtual std::unique_ptr< config_document > hocon::config_document::with_value_text (
    std::string path,
    std::string newValue ) const [pure virtual]
```

Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.

If the path exists, it will remove all duplicates before the final occurrence of the path, and replace the value at the final occurrence of the path. If the path does not exist, it will be added. If the document has an array as the root value, an exception will be thrown.

#### Parameters

<i>path</i>	the path at which to set the desired value
<i>new_value</i>	the value to set at the desired path, represented as a string. This string will be parsed into a <a href="#">config_node</a> using the same options used to parse the entire document, and the text will be inserted as-is into the document. Leading and trailing comments, whitespace, or newlines are not allowed, and if present an exception will be thrown. If a concatenation is passed in for new_value but the document was parsed with JSON, the first value in the concatenation will be parsed and inserted into the <a href="#">config_document</a> .

#### Returns

a copy of the [config\\_document](#) with the desired value at the desired path

Implemented in [hocon::simple\\_config\\_document](#).

### 7.12.2.5 without\_path()

```
virtual std::unique_ptr< config\_document > hocon::config_document::without_path (
    std::string path ) const [pure virtual]
```

Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with all values at the desired path removed.

If the path does not exist in the document, a copy of the current document will be returned. If there is an array at the root, an exception will be thrown.

#### Parameters

<i>path</i>	the path to remove from the document
-------------	--------------------------------------

#### Returns

a copy of the [config\\_document](#) with the desired value removed from the document.


Implemented in [hocon::simple\\_config\\_document](#).

The documentation for this class was generated from the following file:

- [hocon/parser/config\\_document.hpp](#)

## 7.13 hocon::config\_double Class Reference

Inheritance diagram for hocon::config\_double:

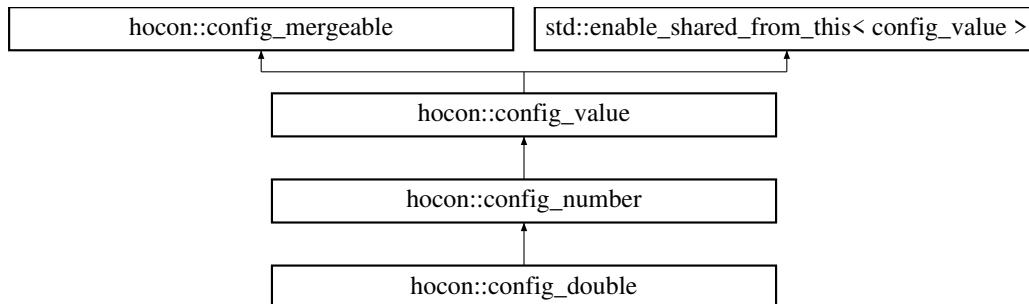

### Public Types

- enum class [type](#) {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

### Public Member Functions

- **config\_double** (shared\_origin [origin](#), double [value](#), std::string original\_text)
- std::string [transform\\_to\\_string](#) () const override
- unwrapped\_value [unwrapped](#) () const override
- int64\_t [long\\_value](#) () const override
- double [double\\_value](#) () const override
- [config\\_value::type](#) [value\\_type](#) () const override

*The type of the value; matches the JSON type schema.*

- bool [is\\_whole](#) () const
- bool [operator==](#) (const [config\\_number](#) &other) const
- bool [operator==](#) ([config\\_value](#) const &other) const override
- bool [operator!=](#) (const [config\\_number](#) &other) const
- int [int\\_value\\_range\\_checked](#) (std::string const &[path](#)) const
- virtual shared\_origin const & [origin](#) () const

*The origin of the value (file, line number, etc.), for debugging and error messages.*

- char const \* [value\\_type\\_name](#) () const

*The printable name of the value type.*

- virtual std::string [render](#) () const

*Renders the config value as a HOCON string.*

- virtual std::string [render](#) ([config\\_render\\_options](#) options) const

*Renders the config value to a string, using the provided options.*

- shared\_config [at\\_key](#) (std::string const &key) const

*Places the value inside a [config](#) at the given key.*

- shared\_config [at\\_path](#) (std::string const &path\_expression) const

*Places the value inside a [config](#) at the given path.*

- virtual shared\_value [with\\_origin](#) (shared\_origin [origin](#)) const

*Returns a [config\\_value](#) based on this one, but with the given origin.*

- virtual shared\_value [relativized](#) (std::string prefix) const

*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*

- virtual resolve\_status **get\_resolve\_status** () const
- std::shared\_ptr< const [config\\_mergeable](#) > [with\\_fallback](#) (std::shared\_ptr< const [config\\_mergeable](#) > other) const override

*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*

## Static Public Member Functions

- static std::shared\_ptr< [config\\_number](#) > **new\_number** (shared\_origin [origin](#), int64\_t [value](#), std::string original\_text)
- static std::shared\_ptr< [config\\_number](#) > **new\_number** (shared\_origin [origin](#), double [value](#), std::string original\_text)
- static char const \* [type\\_name](#) (type t)

## Protected Member Functions

- shared\_value [new\\_copy](#) (shared\_origin) const override
- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const
- virtual void **render** (std::string &result, int indent, bool at\_root, [config\\_render\\_options](#) options) const
- shared\_config **at\_key** (shared\_origin [origin](#), std::string const &key) const
- shared\_config **at\_path** (shared\_origin [origin](#), [path](#) raw\_path) const
- virtual [resolve\\_result](#)< shared\_value > **resolve\_substitutions** ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual bool **ignores\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin [origin](#), std::vector< shared\_value > stack) const
- shared\_value [to\\_fallback\\_value](#) () const override

*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool [equals](#) ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

## Protected Attributes

- `std::string _original_text`

### 7.13.1 Detailed Description

Definition at line 10 of file [config\\_double.hpp](#).

### 7.13.2 Member Enumeration Documentation

#### 7.13.2.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.13.3 Member Function Documentation

#### 7.13.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

##### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

##### Returns

a `config` instance containing this value at the given key.

#### 7.13.3.2 at\_path()

```
shared_config hocon::config_value::at_path (  
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also `config_value#at_key (String)`.

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a `config` instance containing this value at the given path.

#### 7.13.3.3 double\_value()

```
double hocon::config_double::double_value ( ) const [override], [virtual]
```

Implements [hocon::config\\_number](#).

#### 7.13.3.4 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config\_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

#### 7.13.3.5 long\_value()

```
int64_t hocon::config_double::long_value ( ) const [override], [virtual]
```

Implements [hocon::config\\_number](#).

#### 7.13.3.6 new\_copy()

```
shared_value hocon::config_double::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.13.3.7 operator==( )

```
bool hocon::config_number::operator== (
    config_value const & other ) const [override], [virtual], [inherited]
```

Implements [hocon::config\\_value](#).

### 7.13.3.8 origin( )

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.13.3.9 relativized( )

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.13.3.10 render()** [1/2]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.13.3.11 render()** [2/2]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.13.3.12 to\_fallback\_value()**

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.



Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.13.3.13 transform\_to\_string()

```
std::string hocon::config_double::transform_to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.13.3.14 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.13.3.15 unwrapped()

```
unwrapped_value hocon::config_double::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.13.3.16 value\_type()

```
config_value::type hocon::config_number::value_type ( ) const [override], [virtual], [inherited]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implements [hocon::config\\_value](#).

### 7.13.3.17 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

#### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.13.3.18 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.13.3.19 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (  
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

## 7.13.4 Member Data Documentation

### 7.13.4.1 \_original\_text

```
std::string hocon::config_number::_original_text [protected], [inherited]
```

Definition at line 35 of file [config\\_number.hpp](#).

The documentation for this class was generated from the following file:


- `internal/values/config_double.hpp`

## 7.14 hocon::config\_exception Struct Reference

All exceptions thrown by the library are subclasses of [config\\_exception](#).

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::config\_exception:

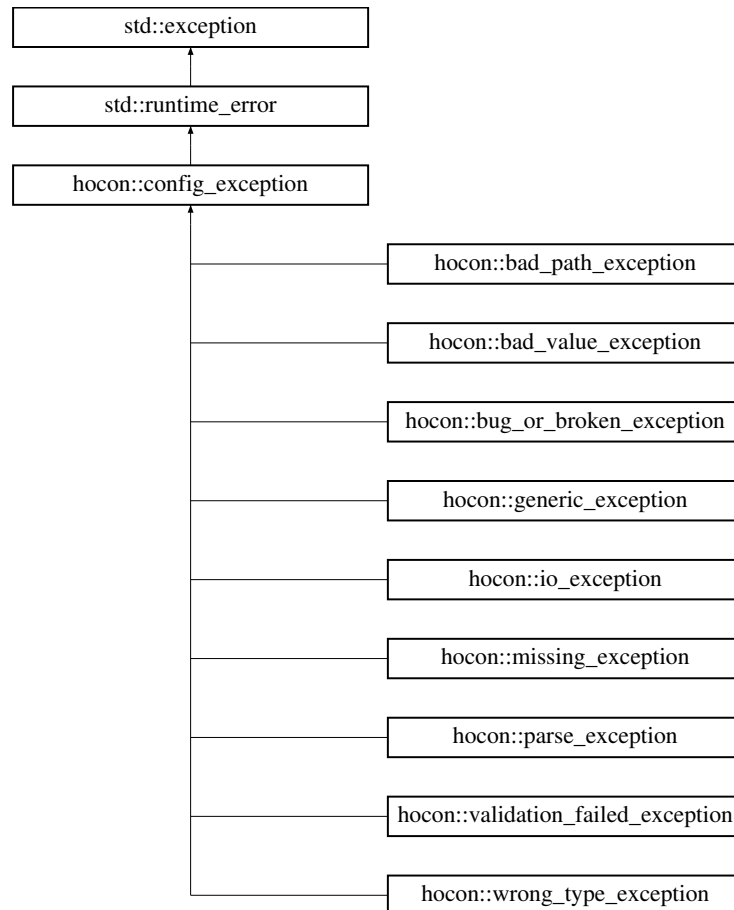

### Public Member Functions

- [config\\_exception](#) ([config\\_origin](#) const &origin, std::string const &message)
- [config\\_exception](#) (std::string const &message)
- [config\\_exception](#) (std::string const &message, std::exception const &e)

#### 7.14.1 Detailed Description

All exceptions thrown by the library are subclasses of [config\\_exception](#).

Definition at line 14 of file [config\\_exception.hpp](#).

#### 7.14.2 Constructor & Destructor Documentation

#### 7.14.2.1 config\_exception() [1/3]

```
hocon::config_exception::config_exception (
    config_origin const & origin,
    std::string const & message ) [inline]
```

Definition at line 15 of file [config\\_exception.hpp](#).

#### 7.14.2.2 config\_exception() [2/3]

```
hocon::config_exception::config_exception (
    std::string const & message ) [inline]
```

Definition at line 17 of file [config\\_exception.hpp](#).

#### 7.14.2.3 config\_exception() [3/3]

```
hocon::config_exception::config_exception (
    std::string const & message,
    std::exception const & e ) [inline]
```

Definition at line 19 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:


- [hocon/config\\_exception.hpp](#)

## 7.15 hocon::config\_include\_context Class Reference

Context provided to a [config\\_includer](#); this interface is only useful inside a [config\\_includer](#) implementation, and is not intended for apps to implement.

```
#include <config_include_context.hpp>
```

Inheritance diagram for `hocon::config_include_context`:



## Public Member Functions

- virtual shared\_parseable [relative\\_to](#) (std::string file\_name) const =0  
*Tries to find a name relative to whatever is doing the including, for example in the same directory as the file doing the including.*
- virtual [config\\_parse\\_options](#) [parse\\_options](#) () const =0  
*Parse options to use (if you use another method to get a [config\\_parseable](#) then use [config\\_parseable#options\(\)](#) instead though).*
- void [set\\_cur\\_dir](#) (std::string dir) const
- std::string [get\\_cur\\_dir](#) () const

## Protected Attributes

- std::shared\_ptr< std::string > [\\_cur\\_dir](#)

### 7.15.1 Detailed Description

Context provided to a [config\\_includer](#); this interface is only useful inside a `config_includer` implementation, and is not intended for apps to implement.

*Do not implement this interface;* it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.

Definition at line 21 of file [config\\_include\\_context.hpp](#).

### 7.15.2 Constructor & Destructor Documentation

#### 7.15.2.1 [config\\_include\\_context\(\)](#)

```
hocon::config_include_context::config_include_context ( ) [inline]
```

Definition at line 23 of file [config\\_include\\_context.hpp](#).

### 7.15.3 Member Function Documentation

#### 7.15.3.1 [get\\_cur\\_dir\(\)](#)

```
std::string hocon::config_include_context::get_cur_dir ( ) const [inline]
```

Definition at line 55 of file [config\\_include\\_context.hpp](#).

### 7.15.3.2 parse\_options()

```
virtual config\_parse\_options hocon::config_include_context::parse_options ( ) const [pure virtual]
```

Parse options to use (if you use another method to get a [config\\_parseable](#) then use [config\\_parseable#options\(\)](#) instead though).

#### Returns

the parse options

Implemented in [hocon::simple\\_include\\_context](#).

### 7.15.3.3 relative\_to()

```
virtual shared\_parseable hocon::config_include_context::relative_to (
    std::string file_name ) const [pure virtual]
```

Tries to find a name relative to whatever is doing the including, for example in the same directory as the file doing the including.

Returns null if it can't meaningfully create a relative name. The returned parseable may not exist; this function is not required to do any IO, just compute what the name would be.

The passed-in filename has to be a complete name (with extension), not just a basename. (Include statements in config files are allowed to give just a basename.)

#### Parameters

<i>filename</i>	the name to make relative to the resource doing the including
-----------------	---------------------------------------------------------------

#### Returns

parseable item relative to the resource doing the including, or null

Implemented in [hocon::simple\\_include\\_context](#).

### 7.15.3.4 set\_cur\_dir()

```
void hocon::config_include_context::set_cur_dir (
    std::string dir ) const [inline]
```

Definition at line 51 of file [config\\_include\\_context.hpp](#).

## 7.15.4 Member Data Documentation

### 7.15.4.1 `_cur_dir`

```
std::shared_ptr<std::string> hocon::config_include_context::_cur_dir [protected]
```

Definition at line 60 of file [config\\_include\\_context.hpp](#).

The documentation for this class was generated from the following file:


- [hocon/config\\_include\\_context.hpp](#)

## 7.16 `hocon::config_includer` Class Reference

Implement this interface and provide an instance to [config\\_parse\\_options.set\\_includer\(\)](#) to customize handling of `include` statements in config files.

```
#include <config_includer.hpp>
```

Inheritance diagram for `hocon::config_includer`:



### Public Member Functions

- virtual `shared_includer` [with\\_fallback](#) (`shared_includer` fallback) `const =0`  
*Returns a new includer that falls back to the given includer.*
- virtual `shared_object` [include](#) (`shared_include_context` context, `std::string` what) `const =0`  
*Parses another item to be included.*

### 7.16.1 Detailed Description

Implement this interface and provide an instance to [config\\_parse\\_options.set\\_includer\(\)](#) to customize handling of `include` statements in config files.

You may also want to implement [config\\_includer\\_file](#) and `config_includer_URL`, or not.

Definition at line 15 of file [config\\_includer.hpp](#).

### 7.16.2 Member Function Documentation



### 7.16.2.1 include()

```
virtual shared_object hocon::config_includer::include (
    shared_include_context context,
    std::string what ) const [pure virtual]
```

Parses another item to be included.

The returned object typically would not have substitutions resolved. You can throw a [config\\_exception](#) here to abort parsing, or return an empty object, but may not return null.

This method is used for a "heuristic" include statement that does not specify file, or URL resource. If the include statement does specify, then the same class implementing [config\\_includer](#) must also implement [config\\_includer\\_file](#) or [config\\_includer\\_URL](#) as needed, or a default includer will be used.

#### Parameters

<i>context</i>	some info about the include context
<i>what</i>	the include statement's argument

#### Returns

a non-null [config\\_object](#)

Implemented in [hocon::simple\\_includer](#).

### 7.16.2.2 with\_fallback()

```
virtual shared_includer hocon::config_includer::with_fallback (
    shared_includer fallback ) const [pure virtual]
```

Returns a new includer that falls back to the given includer.

This is how you can obtain the default includer; it will be provided as a fallback. It's up to your includer to chain to it if you want to. You might want to merge any files found by the fallback includer with any objects you load yourself.

It's important to handle the case where you already have the fallback with a "return this", i.e. this method should not create a new object if the fallback is the same one you already have. The same fallback may be added repeatedly.

#### Parameters

<i>fallback</i>	the previous includer for chaining
-----------------	------------------------------------

#### Returns

a new includer

Implemented in [hocon::simple\\_includer](#).

The documentation for this class was generated from the following file:


- hocon/config\_includer.hpp

## 7.17 hocon::config\_includer\_file Class Reference

Implement this *in addition to* [config\\_includer](#) if you want to support inclusion of files with the `include file("filename")` syntax.

```
#include <config_includer_file.hpp>
```

Inheritance diagram for `hocon::config_includer_file`:



### Public Member Functions

- virtual shared\_object [include\\_file](#) (shared\_include\_context context, std::string what) const =0  
*Parses another item to be included.*

#### 7.17.1 Detailed Description

Implement this *in addition to* [config\\_includer](#) if you want to support inclusion of files with the `include file("filename")` syntax.

If you do not implement this but do implement [config\\_includer](#), attempts to load files will use the default includer.

Definition at line 14 of file [config\\_includer\\_file.hpp](#).

#### 7.17.2 Member Function Documentation

##### 7.17.2.1 include\_file()

```
virtual shared_object hocon::config_includer_file::include_file (
    shared_include_context context,
    std::string what ) const [pure virtual]
```

Parses another item to be included.

The returned object typically would not have substitutions resolved. You can throw a [config\\_exception](#) here to abort parsing, or return an empty object, but may not return null.

##### Parameters

<i>context</i>	some info about the include context
<i>what</i>	the include statement's argument (a file path)

## Returns

a non-null [config\\_object](#)


Implemented in [hocon::simple\\_includer](#).

The documentation for this class was generated from the following file:

- [hocon/config\\_includer\\_file.hpp](#)

## 7.18 hocon::config\_int Class Reference

Inheritance diagram for hocon::config\_int:

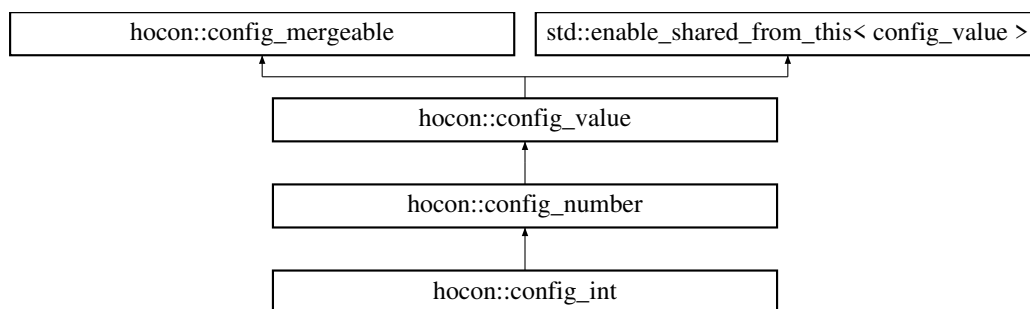

### Public Types

- enum class [type](#) {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

### Public Member Functions

- **config\_int** (shared\_origin [origin](#), int [value](#), std::string original\_text)
- std::string [transform\\_to\\_string](#) () const override
- unwrapped\_value [unwrapped](#) () const override
- int64\_t [long\\_value](#) () const override
- double [double\\_value](#) () const override
- [config\\_value::type](#) [value\\_type](#) () const override

*The type of the value; matches the JSON type schema.*

- bool [is\\_whole](#) () const
- bool [operator==](#) (const [config\\_number](#) &other) const
- bool [operator==](#) ([config\\_value](#) const &other) const override
- bool [operator!=](#) (const [config\\_number](#) &other) const
- int [int\\_value\\_range\\_checked](#) (std::string const &[path](#)) const
- virtual shared\_origin const & [origin](#) () const

*The origin of the value (file, line number, etc.), for debugging and error messages.*

- char const \* [value\\_type\\_name](#) () const

*The printable name of the value type.*

- virtual std::string **render** () const  
*Renders the config value as a HOCON string.*
- virtual std::string **render** (config\_render\_options options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config **at\_key** (std::string const &key) const  
*Places the value inside a `config` at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const  
*Places the value inside a `config` at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin origin) const  
*Returns a `config_value` based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status **get\_resolve\_status** () const
- std::shared\_ptr< const config\_mergeable > **with\_fallback** (std::shared\_ptr< const config\_mergeable > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*

## Static Public Member Functions

- static std::shared\_ptr< config\_number > **new\_number** (shared\_origin origin, int64\_t value, std::string original\_text)
- static std::shared\_ptr< config\_number > **new\_number** (shared\_origin origin, double value, std::string original\_text)
- static char const \* **type\_name** (type t)

## Protected Member Functions

- shared\_value **new\_copy** (shared\_origin) const override
- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, config\_render\_options options) const
- virtual void **render** (std::string &result, int indent, bool at\_root, config\_render\_options options) const
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const
- shared\_config **at\_path** (shared\_origin origin, path raw\_path) const
- virtual resolve\_result< shared\_value > **resolve\_substitutions** (resolve\_context const &context, resolve\_source const &source) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual bool **ignores\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin origin, std::vector< shared\_value > stack) const
- shared\_value **to\_fallback\_value** () const override

*Converts a config to its root object and a `config_value` to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

## Protected Attributes

- std::string [\\_original\\_text](#)

### 7.18.1 Detailed Description

Definition at line 7 of file [config\\_int.hpp](#).

### 7.18.2 Member Enumeration Documentation

#### 7.18.2.1 type

```
enum class hocon::config\_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.18.3 Member Function Documentation

#### 7.18.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

**Returns**

a `config` instance containing this value at the given key.

**7.18.3.2 at\_path()**

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a `config` at the given path.

See also `config_value#at_key(String)`.

**Parameters**

<i>path</i>	path to store this value at.
-------------	------------------------------

**Returns**

a `config` instance containing this value at the given path.

**7.18.3.3 double\_value()**

```
double hocon::config_int::double_value ( ) const [override], [virtual]
```

Implements `hocon::config_number`.

**7.18.3.4 equals()**

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file `config_value.hpp`.

**7.18.3.5 long\_value()**

```
int64_t hocon::config_int::long_value ( ) const [override], [virtual]
```

Implements `hocon::config_number`.

### 7.18.3.6 new\_copy()

```
shared_value hocon::config_int::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.18.3.7 operator==()

```
bool hocon::config_number::operator== (
    config_value const & other ) const [override], [virtual], [inherited]
```

Implements [hocon::config\\_value](#).

### 7.18.3.8 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.18.3.9 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

#### 7.18.3.10 render() [1/2]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

##### Returns

the rendered value

#### 7.18.3.11 render() [2/2]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

##### Parameters

<i>options</i>	the rendering options
----------------	-----------------------

##### Returns

the rendered value



### 7.18.3.12 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],  
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

### 7.18.3.13 transform\_to\_string()

```
std::string hocon::config_int::transform_to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

### 7.18.3.14 type\_name()

```
static char const * hocon::config_value::type_name (   
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

### 7.18.3.15 unwrapped()

```
unwrapped_value hocon::config_int::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.18.3.16 value\_type()

```
config_value::type hocon::config_number::value_type ( ) const [override], [virtual], [inherited]
```

The type of the value; matches the JSON type schema.

Returns

value's type

Implements [hocon::config\\_value](#).

### 7.18.3.17 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

#### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.18.3.18 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.18.3.19 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

## 7.18.4 Member Data Documentation

### 7.18.4.1 \_original\_text

```
std::string hocon::config_number::_original_text [protected], [inherited]
```

Definition at line 35 of file [config\\_number.hpp](#).

The documentation for this class was generated from the following file:


- `internal/values/config_int.hpp`

## 7.19 hocon::config\_list Class Reference

Subtype of `ConfigValue` representing a list value, as in JSON's `[ 1, 2, 3 ]` syntax.

```
#include <config_list.hpp>
```

Inheritance diagram for `hocon::config_list`:

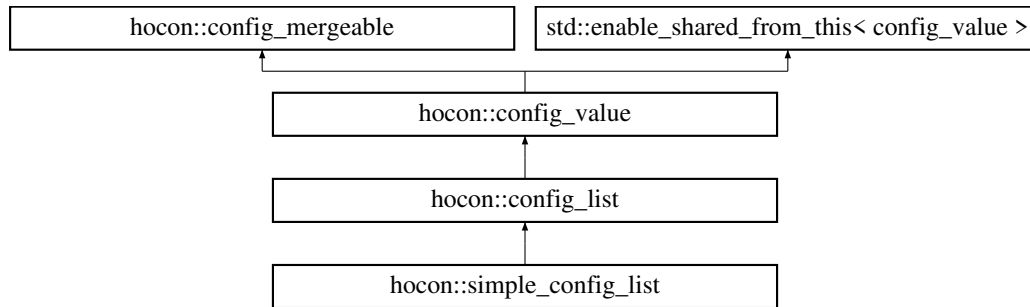

### Public Types

- using `iterator` = `std::vector< shared_value >::const_iterator`
- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

### Public Member Functions

- `config_list` (shared\_origin `origin`)
- virtual bool `is_empty` () const =0
- virtual size\_t `size` () const =0
- virtual shared\_value `operator[]` (size\_t index) const =0
- virtual shared\_value `get` (size\_t index) const =0
- virtual iterator `begin` () const =0
- virtual iterator `end` () const =0
- virtual unwrapped\_value `unwrapped` () const =0
- virtual shared\_origin const & `origin` () const
- *The origin of the value (file, line number, etc.), for debugging and error messages.*
- virtual `type value_type` () const =0
- *The type of the value; matches the JSON type schema.*
- char const \* `value_type_name` () const
- *The printable name of the value type.*
- virtual std::string `render` () const
- *Renders the config value as a HOCON string.*
- virtual std::string `render` (config\_render\_options options) const
- *Renders the config value to a string, using the provided options.*
- shared\_config `at_key` (std::string const &key) const
- *Places the value inside a `config` at the given key.*
- shared\_config `at_path` (std::string const &path\_expression) const
- *Places the value inside a `config` at the given path.*

- virtual shared\_value **with\_origin** (shared\_origin origin) const  
*Returns a config\_value based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status **get\_resolve\_status** () const
- std::shared\_ptr< const config\_mergeable > **with\_fallback** (std::shared\_ptr< const config\_mergeable > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- virtual bool **operator==** (config\_value const &other) const =0
- virtual std::string **transform\_to\_string** () const

## Static Public Member Functions

- static char const \* **type\_name** (type t)

## Protected Member Functions

- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, config\_render\_options options) const
- virtual void **render** (std::string &result, int indent, bool at\_root, config\_render\_options options) const
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const
- shared\_config **at\_path** (shared\_origin origin, path raw\_path) const
- virtual shared\_value **new\_copy** (shared\_origin origin) const =0
- virtual resolve\_result< shared\_value > **resolve\_substitutions** (resolve\_context const &context, resolve\_source const &source) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual bool **ignores\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin origin, std::vector< shared\_value > stack) const
- shared\_value **to\_fallback\_value** () const override  
*Converts a config to its root object and a config\_value to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, config\_render\_options const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** (config\_value const &other, std::function< bool(T const &)> checker)

### 7.19.1 Detailed Description

Subtype of `ConfigValue` representing a list value, as in JSON's `[1, 2, 3]` syntax.

`ConfigList` implements `java.util.List<ConfigValue>` so you can use it like a regular Java list. Or call `unwrapped()` to unwrap the list elements into plain Java values.

Like all `ConfigValue` subtypes, `ConfigList` is immutable. This makes it threadsafe and you never have to create "defensive copies." The mutator methods from `java.util.List` all throw `java.lang.UnsupportedOperationException`.

The `ConfigValue#valueType` method on a list returns `ConfigValueType#LIST`.

*Do not implement `ConfigList`*; it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.

Definition at line 37 of file [config\\_list.hpp](#).

### 7.19.2 Member Typedef Documentation

#### 7.19.2.1 iterator

```
using hocon::config_list::iterator = std::vector<shared_value>::const_iterator
```

Definition at line 42 of file [config\\_list.hpp](#).

### 7.19.3 Member Enumeration Documentation

#### 7.19.3.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the `JSON` type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.19.4 Constructor & Destructor Documentation

### 7.19.4.1 config\_list()

```
hocon::config_list::config_list (
    shared_origin origin ) [inline]
```

Definition at line 39 of file [config\\_list.hpp](#).

## 7.19.5 Member Function Documentation

### 7.19.5.1 at\_key()

```
shared_config hocon::config_value::at_key (
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a `config` instance containing this value at the given key.

### 7.19.5.2 at\_path()

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also `config_value#at_key(String)`.

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a `config` instance containing this value at the given path.

### 7.19.5.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

### 7.19.5.4 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.19.5.5 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).



**7.19.5.6 render()** [1/2]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.19.5.7 render()** [2/2]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.19.5.8 to\_fallback\_value()**

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.19.5.9 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.19.5.10 unwrapped()

```
virtual unwrapped_value hocon::config_list::unwrapped ( ) const [pure virtual]
```

Implements [hocon::config\\_value](#).

#### 7.19.5.11 value\_type()

```
virtual type hocon::config_value::value_type ( ) const [pure virtual], [inherited]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implemented in [hocon::config\\_object](#), [hocon::config\\_boolean](#), [hocon::config\\_concatenation](#), [hocon::config\\_delayed\\_merge](#), [hocon::config\\_null](#), [hocon::config\\_number](#), [hocon::config\\_reference](#), [hocon::config\\_string](#), and [hocon::simple\\_config\\_list](#).

#### 7.19.5.12 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

##### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.19.5.13 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

#### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

#### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.19.5.14 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns


the new `config_value` with the given origin

The documentation for this class was generated from the following file:

- `hocon/config_list.hpp`

## 7.20 hocon::config\_long Class Reference

Inheritance diagram for `hocon::config_long`:

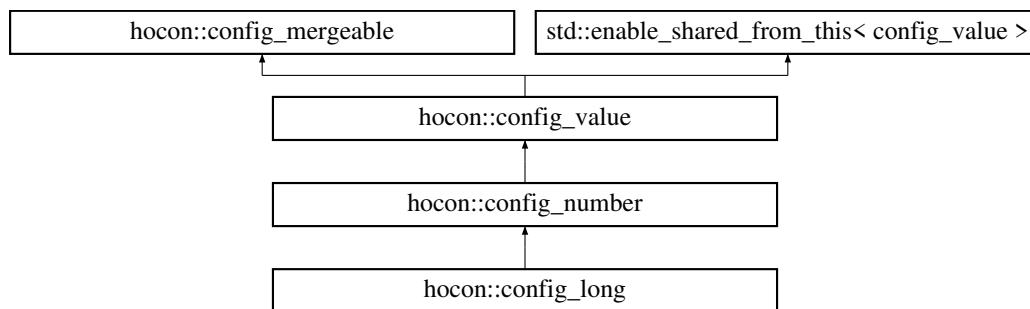

### Public Types

- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the `JSON` type schema).*

### Public Member Functions

- `config_long` (shared\_origin `origin`, int64\_t `value`, std::string original\_text)
- std::string `transform_to_string` () const override
- unwrapped\_value `unwrapped` () const override
- int64\_t `long_value` () const override
- double `double_value` () const override
- `config_value::type` `value_type` () const override

*The type of the value; matches the `JSON` type schema.*

- bool `is_whole` () const
- bool `operator==` (const `config_number` &other) const
- bool `operator==` (`config_value` const &other) const override
- bool `operator!=` (const `config_number` &other) const
- int `int_value_range_checked` (std::string const &path) const
- virtual shared\_origin const & `origin` () const

*The origin of the value (file, line number, etc.), for debugging and error messages.*

- char const \* [value\\_type\\_name](#) () const  
*The printable name of the value type.*
- virtual std::string [render](#) () const  
*Renders the config value as a HOCON string.*
- virtual std::string [render](#) ([config\\_render\\_options](#) options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config [at\\_key](#) (std::string const &key) const  
*Places the value inside a [config](#) at the given key.*
- shared\_config [at\\_path](#) (std::string const &path\_expression) const  
*Places the value inside a [config](#) at the given path.*
- virtual shared\_value [with\\_origin](#) (shared\_origin [origin](#)) const  
*Returns a [config\\_value](#) based on this one, but with the given origin.*
- virtual shared\_value [relativized](#) (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status [get\\_resolve\\_status](#) () const
- std::shared\_ptr< const [config\\_mergeable](#) > [with\\_fallback](#) (std::shared\_ptr< const [config\\_mergeable](#) > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*

## Static Public Member Functions

- static std::shared\_ptr< [config\\_number](#) > [new\\_number](#) (shared\_origin [origin](#), int64\_t [value](#), std::string original\_text)
- static std::shared\_ptr< [config\\_number](#) > [new\\_number](#) (shared\_origin [origin](#), double [value](#), std::string original\_text)
- static char const \* [type\\_name](#) (type t)

## Protected Member Functions

- shared\_value [new\\_copy](#) (shared\_origin) const override
- virtual void [render](#) (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const
- virtual void [render](#) (std::string &result, int indent, bool at\_root, [config\\_render\\_options](#) options) const
- shared\_config [at\\_key](#) (shared\_origin [origin](#), std::string const &key) const
- shared\_config [at\\_path](#) (shared\_origin [origin](#), [path](#) raw\_path) const
- virtual [resolve\\_result](#)< shared\_value > [resolve\\_substitutions](#) ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const
- void [require\\_not\\_ignoring\\_fallbacks](#) () const
- virtual bool [ignores\\_fallbacks](#) () const
- virtual shared\_value [with\\_fallbacks\\_ignored](#) () const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_object](#) (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value [merged\\_with\\_object](#) (shared\_object fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (shared\_value fallback) const
- virtual shared\_value [construct\\_delayed\\_merge](#) (shared\_origin [origin](#), std::vector< shared\_value > stack) const
- shared\_value [to\\_fallback\\_value](#) () const override  
*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

## Protected Attributes

- std::string [\\_original\\_text](#)

### 7.20.1 Detailed Description

Definition at line 10 of file [config\\_long.hpp](#).

### 7.20.2 Member Enumeration Documentation

#### 7.20.2.1 type

```
enum class hocon::config\_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.20.3 Member Function Documentation

#### 7.20.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

**Returns**

a `config` instance containing this value at the given key.

**7.20.3.2 at\_path()**

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a `config` at the given path.

See also `config_value#at_key(String)`.

**Parameters**

<i>path</i>	path to store this value at.
-------------	------------------------------

**Returns**

a `config` instance containing this value at the given path.

**7.20.3.3 double\_value()**

```
double hocon::config_long::double_value ( ) const [override], [virtual]
```

Implements `hocon::config_number`.

**7.20.3.4 equals()**

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file `config_value.hpp`.

**7.20.3.5 long\_value()**

```
int64_t hocon::config_long::long_value ( ) const [override], [virtual]
```

Implements `hocon::config_number`.



### 7.20.3.6 new\_copy()

```
shared_value hocon::config_long::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.20.3.7 operator==()

```
bool hocon::config_number::operator== (
    config_value const & other ) const [override], [virtual], [inherited]
```

Implements [hocon::config\\_value](#).

### 7.20.3.8 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.20.3.9 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

### 7.20.3.10 render() [1/2]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

#### Returns

the rendered value

### 7.20.3.11 render() [2/2]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

#### Parameters

<i>options</i>	the rendering options
----------------	-----------------------

#### Returns

the rendered value

### 7.20.3.12 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual], [inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

### 7.20.3.13 transform\_to\_string()

```
std::string hocon::config_long::transform_to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

### 7.20.3.14 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

### 7.20.3.15 unwrapped()

```
unwrapped_value hocon::config_long::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.20.3.16 value\_type()

```
config_value::type hocon::config_number::value_type ( ) const [override], [virtual], [inherited]
```

The type of the value; matches the JSON type schema.

Returns

value's type

Implements [hocon::config\\_value](#).

### 7.20.3.17 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

#### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.20.3.18 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.20.3.19 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (  
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

## 7.20.4 Member Data Documentation

### 7.20.4.1 \_original\_text

```
std::string hocon::config_number::_original_text [protected], [inherited]
```


Definition at line 35 of file [config\\_number.hpp](#).

The documentation for this class was generated from the following file:

- `internal/values/config_long.hpp`

## 7.21 hocon::config\_mergeable Class Reference

Inheritance diagram for hocon::config\_mergeable:

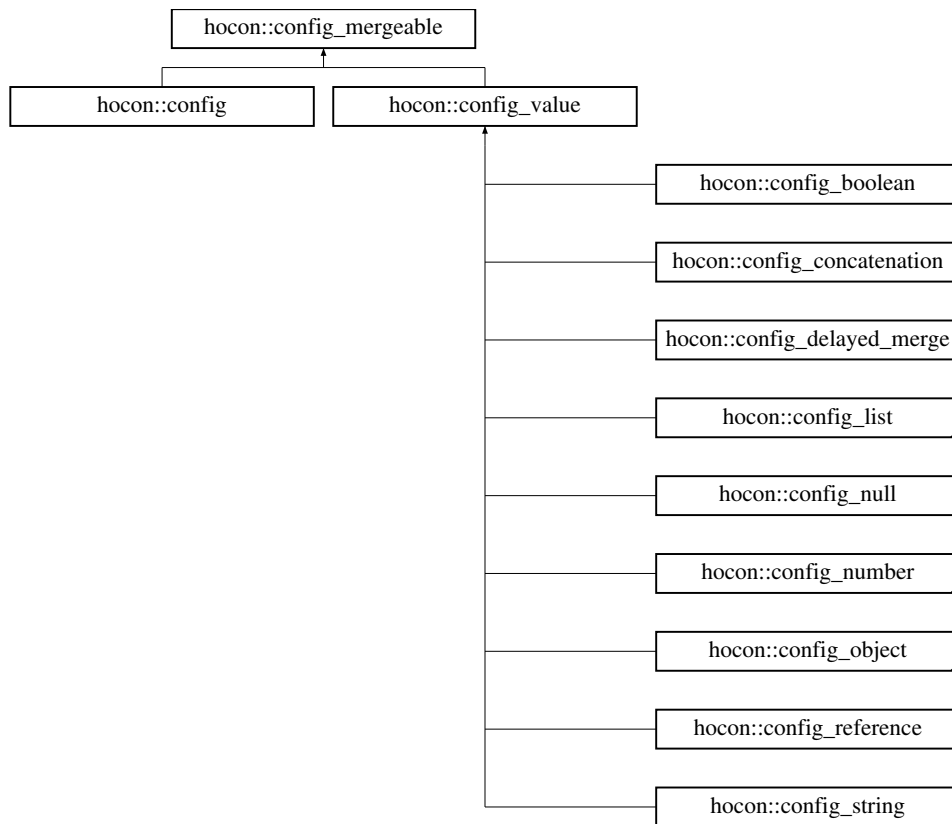

### Public Member Functions

- virtual std::shared\_ptr< const [config\\_mergeable](#) > [with\\_fallback](#) (std::shared\_ptr< const [config\\_mergeable](#) > other) const =0  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*

### Protected Member Functions

- virtual shared\_value [to\\_fallback\\_value](#) () const =0  
*Converts a config to its root object and a [config\\_value](#) to itself.*

### Friends

- class [config\\_value](#)

#### 7.21.1 Detailed Description

Definition at line 8 of file [config\\_mergeable.hpp](#).

## 7.21.2 Member Function Documentation

### 7.21.2.1 to\_fallback\_value()

```
virtual shared_value hocon::config_mergeable::to_fallback_value ( ) const [protected], [pure virtual]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implemented in [hocon::config](#), and [hocon::config\\_value](#).

### 7.21.2.2 with\_fallback()

```
virtual std::shared_ptr< const config_mergeable > hocon::config_mergeable::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [pure virtual]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implemented in [hocon::config](#), and [hocon::config\\_value](#).

## 7.21.3 Friends And Related Function Documentation

### 7.21.3.1 config\_value

```
friend class config_value [friend]
```

Definition at line 9 of file [config\\_mergeable.hpp](#).

The documentation for this class was generated from the following file:


- [hocon/config\\_mergeable.hpp](#)

## 7.22 hocon::config\_node Class Reference

A node in the syntax tree for a HOCON or JSON document.

```
#include <config_node.hpp>
```

Inheritance diagram for `hocon::config_node`:

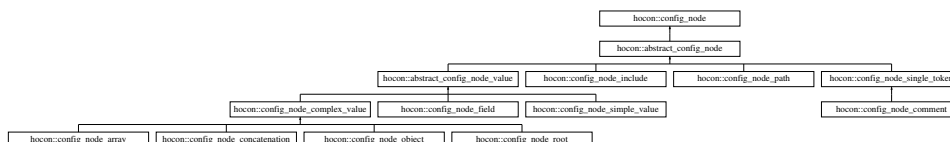

### Public Member Functions

- virtual `std::string render ()` const =0

*The original text of the input which was used to form this particular node.*



### 7.22.1 Detailed Description

A node in the syntax tree for a HOCON or JSON document.

Because this object is immutable, it is safe to use from multiple threads and there's no need for "defensive copies."

*Do not implement interface `ConfigNode`*; it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.

Definition at line 21 of file [config\\_node.hpp](#).

### 7.22.2 Member Function Documentation

#### 7.22.2.1 render()

```
virtual std::string hocon::config_node::render ( ) const [pure virtual]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implemented in [hocon::abstract\\_config\\_node](#).

The documentation for this class was generated from the following file:

- [hocon/parser/config\\_node.hpp](#)

## 7.23 hocon::config\_node\_array Class Reference

Inheritance diagram for `hocon::config_node_array`:

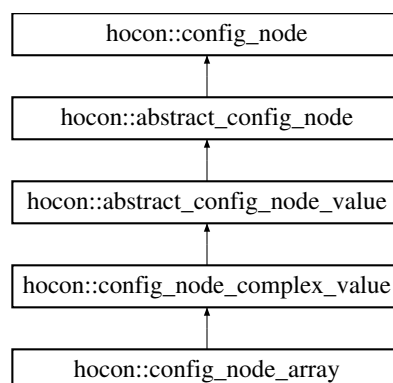

## Public Member Functions

- **config\_node\_array** (shared\_node\_list children)
- std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **new\_node** (shared\_node\_list nodes) const override
- token\_list **get\_tokens** () const override
- shared\_node\_list const & **children** () const
- std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **indent\_text** (shared\_node indentation) const
- std::string **render** () const  
*The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.23.1 Detailed Description

Definition at line 10 of file [config\\_node\\_array.hpp](#).

### 7.23.2 Member Function Documentation

#### 7.23.2.1 get\_tokens()

```
token_list hocon::config_node_complex_value::get_tokens ( ) const [override], [virtual],
[inherited]
```

Implements [hocon::abstract\\_config\\_node](#).

#### 7.23.2.2 new\_node()

```
std::shared_ptr< const config\_node\_complex\_value > hocon::config_node_array::new_node (
    shared_node_list nodes ) const [override], [virtual]
```

Implements [hocon::config\\_node\\_complex\\_value](#).

#### 7.23.2.3 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- internal/nodes/config\_node\_array.hpp

## 7.24 hocon::config\_node\_comment Class Reference

Inheritance diagram for hocon::config\_node\_comment:

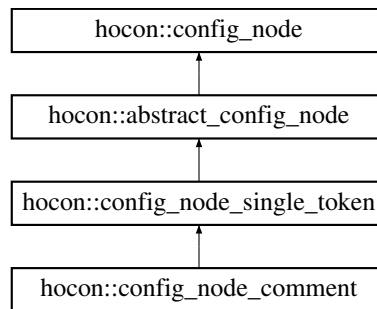

### Public Member Functions

- **config\_node\_comment** (shared\_token [comment](#))
- std::string **comment\_text** () const
- token\_list **get\_tokens** () const override
- shared\_token **get\_token** () const
- std::string **render** () const  
*The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.24.1 Detailed Description

Definition at line 7 of file [config\\_node\\_comment.hpp](#).

### 7.24.2 Member Function Documentation

#### 7.24.2.1 get\_tokens()

```
token_list hocon::config_node_single_token::get_tokens ( ) const [override], [virtual], [inherited]
```

Implements [hocon::abstract\\_config\\_node](#).

#### 7.24.2.2 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- internal/nodes/config\_node\_comment.hpp

## 7.25 hocon::config\_node\_complex\_value Class Reference

Inheritance diagram for hocon::config\_node\_complex\_value:

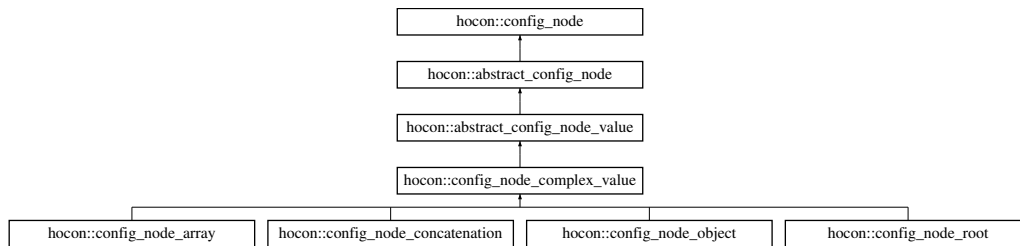

### Public Member Functions

- **config\_node\_complex\_value** (shared\_node\_list children)
- token\_list [get\\_tokens](#) () const override
- shared\_node\_list const & **children** () const
- std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **indent\_text** (shared\_node indentation) const
- virtual std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **new\_node** (shared\_node\_list nodes) const =0
- std::string [render](#) () const  
*The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.25.1 Detailed Description

Definition at line 7 of file [config\\_node\\_complex\\_value.hpp](#).

### 7.25.2 Member Function Documentation

#### 7.25.2.1 get\_tokens()

```
token_list hocon::config_node_complex_value::get_tokens ( ) const [override], [virtual]
```

Implements [hocon::abstract\\_config\\_node](#).

### 7.25.2.2 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- internal/nodes/config\_node\_complex\_value.hpp

## 7.26 hocon::config\_node\_concatenation Class Reference

Inheritance diagram for hocon::config\_node\_concatenation:

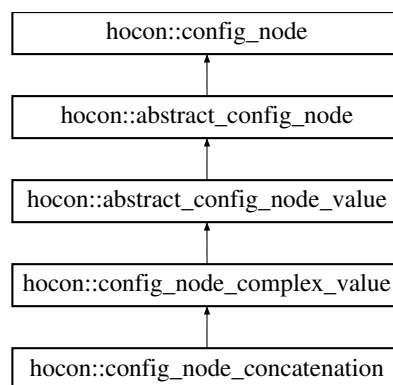

### Public Member Functions

- **config\_node\_concatenation** (shared\_node\_list children)
- `std::shared_ptr< const config\_node\_complex\_value > new_node` (shared\_node\_list nodes) const override
- token\_list [get\\_tokens](#) () const override
- shared\_node\_list const & **children** () const
- `std::shared_ptr< const config\_node\_complex\_value > indent_text` (shared\_node indentation) const
- `std::string render` () const
  - The original text of the input which was used to form this particular node.*
- `bool operator==` (const [abstract\\_config\\_node](#) &other) const

### 7.26.1 Detailed Description

Definition at line 7 of file [config\\_node\\_concatenation.hpp](#).

## 7.26.2 Member Function Documentation

### 7.26.2.1 get\_tokens()

```
token_list hocon::config_node_complex_value::get_tokens ( ) const [override], [virtual],
[inherited]
```

Implements [hocon::abstract\\_config\\_node](#).

### 7.26.2.2 new\_node()

```
std::shared_ptr< const config_node_complex_value > hocon::config_node_concatenation::new_node
(
    shared_node_list nodes ) const [override], [virtual]
```

Implements [hocon::config\\_node\\_complex\\_value](#).

### 7.26.2.3 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String

Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:


- internal/nodes/config\_node\_concatenation.hpp

## 7.27 hocon::config\_node\_field Class Reference

A field represents a key-value pair of the format "key : value", where key is a quoted or unquoted string, and value can be any node type.

```
#include <config_node_field.hpp>
```

Inheritance diagram for `hocon::config_node_field`:

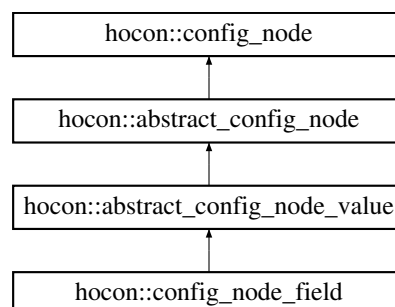

## Public Member Functions

- **config\_node\_field** (shared\_node\_list children)
  - token\_list [get\\_tokens](#) () const override
  - std::shared\_ptr< const [config\\_node\\_field](#) > **replace\_value** (shared\_node\_value new\_value) const
  - shared\_node\_value **get\_value** () const
  - shared\_token **separator** () const
  - std::vector< std::string > **comments** () const
  - std::shared\_ptr< const [config\\_node\\_path](#) > **path** () const
  - std::string [render](#) () const
- The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.27.1 Detailed Description

A field represents a key-value pair of the format "key : value", where key is a quoted or unquoted string, and value can be any node type.

Definition at line 13 of file [config\\_node\\_field.hpp](#).

### 7.27.2 Member Function Documentation

#### 7.27.2.1 get\_tokens()

```
token_list hocon::config_node_field::get_tokens ( ) const [override], [virtual]
```

Implements [hocon::abstract\\_config\\_node](#).

#### 7.27.2.2 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String

Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:


- internal/nodes/config\_node\_field.hpp

## 7.28 hocon::config\_node\_include Class Reference

Represents an include statement of the form "include include\_kind(include\_path)".

```
#include <config_node_include.hpp>
```

Inheritance diagram for hocon::config\_node\_include:



### Public Member Functions

- **config\_node\_include** (shared\_node\_list children, config\_include\_kind kind)
- token\_list [get\\_tokens](#) () const override
- shared\_node\_list const & **children** () const
- config\_include\_kind **kind** () const
- std::string **name** () const
- std::string [render](#) () const
- *The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.28.1 Detailed Description

Represents an include statement of the form "include include\_kind(include\_path)".

Definition at line 10 of file [config\\_node\\_include.hpp](#).

### 7.28.2 Member Function Documentation

#### 7.28.2.1 get\_tokens()

```
token_list hocon::config_node_include::get_tokens ( ) const [override], [virtual]
```

Implements [hocon::abstract\\_config\\_node](#).



### 7.28.2.2 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- internal/nodes/config\_node\_include.hpp

## 7.29 hocon::config\_node\_object Class Reference

Inheritance diagram for hocon::config\_node\_object:

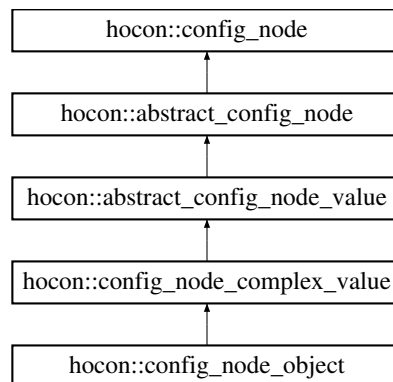

### Public Member Functions

- **config\_node\_object** (shared\_node\_list children)
  - std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **new\_node** (shared\_node\_list nodes) const override
  - bool **has\_value** ([path](#) desired\_path) const
  - shared\_node\_object **change\_value\_on\_path** ([path](#) desired\_path, shared\_node\_value [value](#), config\_syntax flavor) const
  - shared\_node\_object **set\_value\_on\_path** (std::string desired\_path, shared\_node\_value [value](#), config\_syntax flavor=config\_syntax::CONF) const
  - shared\_node\_object **set\_value\_on\_path** ([config\\_node\\_path](#) desired\_path, shared\_node\_value [value](#), config\_syntax flavor=config\_syntax::CONF) const
  - shared\_node\_list **indentation** () const
  - shared\_node\_object **add\_value\_on\_path** ([config\\_node\\_path](#) desired\_path, shared\_node\_value [value](#), config\_syntax flavor) const
  - shared\_node\_object **remove\_value\_on\_path** (std::string desired\_path, config\_syntax flavor) const
  - token\_list **get\_tokens** () const override
  - shared\_node\_list const & **children** () const
  - std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **indent\_text** (shared\_node indentation) const
  - std::string **render** () const
- The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

## Static Public Member Functions

- static bool **contains\_token** (shared\_node node, token\_type [token](#))

### 7.29.1 Detailed Description

Definition at line 13 of file [config\\_node\\_object.hpp](#).

### 7.29.2 Member Function Documentation

#### 7.29.2.1 get\_tokens()

```
token_list hocon::config_node_complex_value::get_tokens ( ) const [override], [virtual],  
[inherited]
```

Implements [hocon::abstract\\_config\\_node](#).

#### 7.29.2.2 new\_node()

```
std::shared_ptr< const config\_node\_complex\_value > hocon::config_node_object::new_node (   
    shared_node_list nodes ) const [override], [virtual]
```

Implements [hocon::config\\_node\\_complex\\_value](#).

#### 7.29.2.3 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- internal/nodes/config\_node\_object.hpp

## 7.30 hocon::config\_node\_path Class Reference

Inheritance diagram for hocon::config\_node\_path:



### Public Member Functions

- **config\_node\_path** ([path](#) node\_path, token\_list [tokens](#))
- token\_list [get\\_tokens](#) () const override
- [path](#) **get\_path** () const
- [config\\_node\\_path](#) **sub\_path** (int to\_remove)
- [config\\_node\\_path](#) **first** ()
- std::string [render](#) () const
 

*The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.30.1 Detailed Description

Definition at line 9 of file [config\\_node\\_path.hpp](#).

### 7.30.2 Member Function Documentation

#### 7.30.2.1 get\_tokens()

```
token_list hocon::config_node_path::get_tokens ( ) const [override], [virtual]
```

Implements [hocon::abstract\\_config\\_node](#).

#### 7.30.2.2 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- internal/nodes/config\_node\_path.hpp

## 7.31 hocon::config\_node\_root Class Reference

Inheritance diagram for hocon::config\_node\_root:

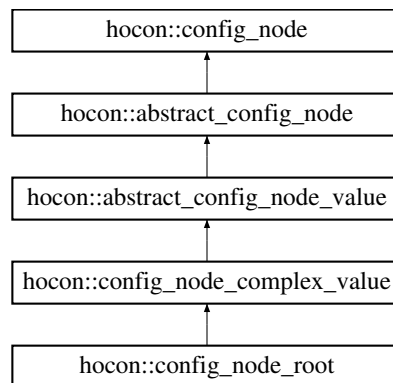

### Public Member Functions

- **config\_node\_root** (shared\_node\_list children, shared\_origin origin)
- std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **new\_node** (shared\_node\_list nodes) const override
- std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **value** () const
- std::shared\_ptr< const [config\\_node\\_root](#) > **set\_value** (std::string desired\_path, shared\_node\_value, config\_syntax flavor) const
- bool **has\_value** (std::string desired\_path) const
- token\_list **get\_tokens** () const override
- shared\_node\_list const & **children** () const
- std::shared\_ptr< const [config\\_node\\_complex\\_value](#) > **indent\_text** (shared\_node indentation) const
- std::string **render** () const
 

*The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.31.1 Detailed Description

Definition at line 8 of file [config\\_node\\_root.hpp](#).

### 7.31.2 Member Function Documentation

#### 7.31.2.1 get\_tokens()

```
token_list hocon::config_node_complex_value::get_tokens ( ) const [override], [virtual],
[inherited]
```

Implements [hocon::abstract\\_config\\_node](#).

### 7.31.2.2 new\_node()

```
std::shared_ptr< const config_node_complex_value > hocon::config_node_root::new_node (
    shared_node_list nodes ) const [override], [virtual]
```

Implements [hocon::config\\_node\\_complex\\_value](#).

### 7.31.2.3 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- internal/nodes/config\_node\_root.hpp

## 7.32 hocon::config\_node\_simple\_value Class Reference

Inheritance diagram for hocon::config\_node\_simple\_value:

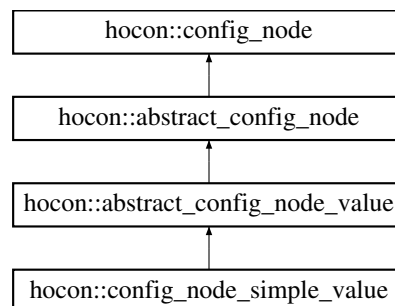

### Public Member Functions

- **config\_node\_simple\_value** (shared\_token [value](#))
- shared\_token **get\_token** () const
- shared\_value **get\_value** () const
- token\_list **get\_tokens** () const override
- std::string **render** () const

*The original text of the input which was used to form this particular node.*

- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.32.1 Detailed Description

Definition at line 8 of file [config\\_node\\_simple\\_value.hpp](#).

### 7.32.2 Member Function Documentation

#### 7.32.2.1 `get_tokens()`

```
token_list hocon::config_node_simple_value::get_tokens ( ) const [override], [virtual]
```

Implements [hocon::abstract\\_config\\_node](#).

#### 7.32.2.2 `render()`

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

##### Returns

the original text used to form this node as a String


Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:

- [internal/nodes/config\\_node\\_simple\\_value.hpp](#)

## 7.33 `hocon::config_node_single_token` Class Reference

Inheritance diagram for `hocon::config_node_single_token`:

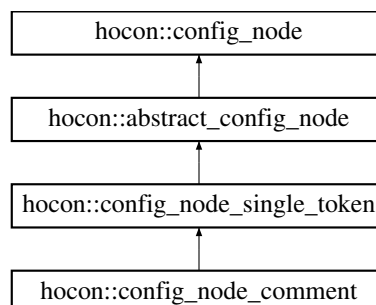

## Public Member Functions

- **config\_node\_single\_token** (shared\_token t)
- token\_list **get\_tokens** () const override
- shared\_token **get\_token** () const
- std::string **render** () const  
*The original text of the input which was used to form this particular node.*
- bool **operator==** (const [abstract\\_config\\_node](#) &other) const

### 7.33.1 Detailed Description

Definition at line 8 of file [config\\_node\\_single\\_token.hpp](#).

### 7.33.2 Member Function Documentation

#### 7.33.2.1 get\_tokens()

```
token_list hocon::config_node_single_token::get_tokens ( ) const [override], [virtual]
```

Implements [hocon::abstract\\_config\\_node](#).

#### 7.33.2.2 render()

```
std::string hocon::abstract_config_node::render ( ) const [virtual], [inherited]
```

The original text of the input which was used to form this particular node.

#### Returns

the original text used to form this node as a String

Implements [hocon::config\\_node](#).

The documentation for this class was generated from the following file:


- internal/nodes/config\_node\_single\_token.hpp

## 7.34 hocon::config\_null Class Reference

This exists because sometimes null is not the same as missing.

```
#include <config_null.hpp>
```

Inheritance diagram for hocon::config\_null:

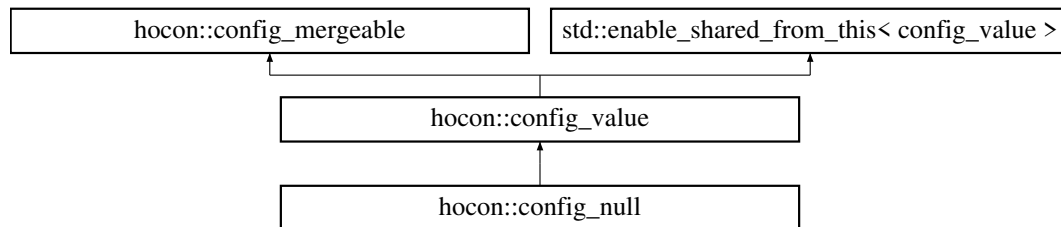

### Public Types

- enum class [type](#) {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

The type of a configuration value (following the [JSON](#) type schema).

### Public Member Functions

- config\_null** (shared\_origin [origin](#))
- config\_value::type value\_type** () const override  
 The type of the value; matches the JSON type schema.
- std::string **transform\_to\_string** () const override
- unwrapped\_value **unwrapped** () const override
- bool **operator==** (config\_value const &other) const override
- virtual shared\_origin const & **origin** () const  
 The origin of the value (file, line number, etc.), for debugging and error messages.
- char const \* **value\_type\_name** () const  
 The printable name of the value type.
- virtual std::string **render** () const  
 Renders the config value as a HOCON string.
- virtual std::string **render** (config\_render\_options options) const  
 Renders the config value to a string, using the provided options.
- shared\_config **at\_key** (std::string const &key) const  
 Places the value inside a [config](#) at the given key.
- shared\_config **at\_path** (std::string const &path\_expression) const  
 Places the value inside a [config](#) at the given path.
- virtual shared\_value **with\_origin** (shared\_origin [origin](#)) const  
 Returns a [config\\_value](#) based on this one, but with the given origin.
- virtual shared\_value **relativized** (std::string prefix) const  
 This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.
- virtual resolve\_status **get\_resolve\_status** () const
- std::shared\_ptr< const [config\\_mergeable](#) > **with\_fallback** (std::shared\_ptr< const [config\\_mergeable](#) > other) const override  
 Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.



## Static Public Member Functions

- static char const \* [type\\_name](#) (type t)

## Protected Member Functions

- shared\_value [new\\_copy](#) (shared\_origin) const override
- void [render](#) (std::string &result, int indent, bool at\_root, [config\\_render\\_options](#) options) const override
- virtual void [render](#) (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const
- shared\_config [at\\_key](#) (shared\_origin [origin](#), std::string const &key) const
- shared\_config [at\\_path](#) (shared\_origin [origin](#), [path](#) raw\_path) const
- virtual [resolve\\_result](#)< shared\_value > [resolve\\_substitutions](#) ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const
- void [require\\_not\\_ignoring\\_fallbacks](#) () const
- virtual bool [ignores\\_fallbacks](#) () const
- virtual shared\_value [with\\_fallbacks\\_ignored](#) () const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_the\\_unmergeable](#) (std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value [merged\\_with\\_object](#) (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value [merged\\_with\\_object](#) (shared\_object fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value [merged\\_with\\_non\\_object](#) (shared\_value fallback) const
- virtual shared\_value [construct\\_delayed\\_merge](#) (shared\_origin [origin](#), std::vector< shared\_value > stack) const
- shared\_value [to\\_fallback\\_value](#) () const override

*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void [indent](#) (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > [replace\\_child\\_in\\_list](#) (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool [has\\_descendant\\_in\\_list](#) (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool [equals](#) ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.34.1 Detailed Description

This exists because sometimes null is not the same as missing.

Specifically, if a value is set to null we can give a better error message (indicating where it was set to null) in case someone asks for the value. Also, null overrides values set "earlier" in the search path, while missing values do not.

Definition at line 17 of file [config\\_null.hpp](#).

### 7.34.2 Member Enumeration Documentation

### 7.34.2.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

## 7.34.3 Member Function Documentation

### 7.34.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also [config\\_value#at\\_path\(string\)](#).

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a [config](#) instance containing this value at the given key.

### 7.34.3.2 at\_path()

```
shared_config hocon::config_value::at_path (  
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also [config\\_value#at\\_key\(String\)](#).

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a [config](#) instance containing this value at the given path.

### 7.34.3.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

### 7.34.3.4 new\_copy()

```
shared_value hocon::config_null::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.34.3.5 operator==()

```
bool hocon::config_null::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.34.3.6 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.34.3.7 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at `foo.bar` in the parent, and the included file as a substitution `$(a.b.c)`, the included substitution now needs to be `$(foo.bar.a.b.c)` because we resolve substitutions globally only after parsing everything.

## Parameters

<i>prefix</i>	
---------------	--

## Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.34.3.8 render()** [1/3]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

## Returns

the rendered value

**7.34.3.9 render()** [2/3]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

## Parameters

<i>options</i>	the rendering options
----------------	-----------------------

## Returns

the rendered value

**7.34.3.10 render()** [3/3]

```
void hocon::config_null::render (
    std::string & result,
    int indent,
    bool at_root,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.34.3.11 to\_fallback\_value()**

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

**7.34.3.12 transform\_to\_string()**

```
std::string hocon::config_null::transform_to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.34.3.13 type\_name()**

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.34.3.14 unwrapped()

```
unwrapped_value hocon::config_null::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.34.3.15 value\_type()

```
config_value::type hocon::config_null::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implements [hocon::config\\_value](#).

#### 7.34.3.16 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

##### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.34.3.17 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

#### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

#### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.34.3.18 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).



## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns


the new [config\\_value](#) with the given origin

The documentation for this class was generated from the following file:

- internal/values/config\_null.hpp

## 7.35 hocon::config\_number Class Reference

Inheritance diagram for hocon::config\_number:

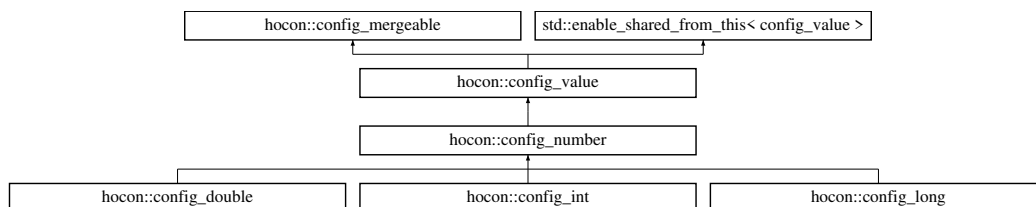

### Public Types

- enum class [type](#) {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

### Public Member Functions

- **config\_number** (shared\_origin [origin](#), std::string original\_text)
- std::string **transform\_to\_string** () const override
- [config\\_value::type](#) **value\_type** () const override  
*The type of the value; matches the JSON type schema.*
- virtual int64\_t **long\_value** () const =0
- virtual double **double\_value** () const =0
- bool **is\_whole** () const
- bool **operator==** (const [config\\_number](#) &other) const
- bool **operator!=** (const [config\\_number](#) &other) const
- bool **operator==** ([config\\_value](#) const &other) const override
- int **int\_value\_range\_checked** (std::string const &path) const
- virtual shared\_origin const & **origin** () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* **value\_type\_name** () const  
*The printable name of the value type.*

- virtual unwrapped\_value **unwrapped** () const =0
- virtual std::string **render** () const  
*Renders the config value as a HOCON string.*
- virtual std::string **render** (config\_render\_options options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config **at\_key** (std::string const &key) const  
*Places the value inside a `config` at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const  
*Places the value inside a `config` at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin origin) const  
*Returns a `config_value` based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status **get\_resolve\_status** () const
- std::shared\_ptr< const config\_mergeable > **with\_fallback** (std::shared\_ptr< const config\_mergeable > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*

## Static Public Member Functions

- static std::shared\_ptr< config\_number > **new\_number** (shared\_origin origin, int64\_t value, std::string original\_text)
- static std::shared\_ptr< config\_number > **new\_number** (shared\_origin origin, double value, std::string original\_text)
- static char const \* **type\_name** (type t)

## Protected Member Functions

- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, config\_render\_options options) const
- virtual void **render** (std::string &result, int indent, bool at\_root, config\_render\_options options) const
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const
- shared\_config **at\_path** (shared\_origin origin, path raw\_path) const
- virtual shared\_value **new\_copy** (shared\_origin origin) const =0
- virtual **resolve\_result**< shared\_value > **resolve\_substitutions** (resolve\_context const &context, resolve\_source const &source) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual bool **ignores\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin origin, std::vector< shared\_value > stack) const
- shared\_value **to\_fallback\_value** () const override  
*Converts a config to its root object and a `config_value` to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

## Protected Attributes

- std::string [\\_original\\_text](#)

### 7.35.1 Detailed Description

Definition at line 10 of file [config\\_number.hpp](#).

### 7.35.2 Member Enumeration Documentation

#### 7.35.2.1 type

```
enum class hocon::config\_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.35.3 Member Function Documentation

#### 7.35.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

**Returns**

a `config` instance containing this value at the given key.

**7.35.3.2 at\_path()**

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const    [inherited]
```

Places the value inside a `config` at the given path.

See also `config_value#at_key(String)`.

**Parameters**

<i>path</i>	path to store this value at.
-------------	------------------------------

**Returns**

a `config` instance containing this value at the given path.

**7.35.3.3 equals()**

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker )    [inline], [static], [protected], [inherited]
```

Definition at line 250 of file `config_value.hpp`.

**7.35.3.4 operator==()**

```
bool hocon::config_number::operator== (
    config_value const & other ) const    [override], [virtual]
```

Implements `hocon::config_value`.

### 7.35.3.5 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.35.3.6 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

### 7.35.3.7 render() [1/2]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

#### Returns

the rendered value

### 7.35.3.8 render() [2/2]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

#### Parameters

<i>options</i>	the rendering options
----------------	-----------------------

#### Returns

the rendered value

### 7.35.3.9 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

### 7.35.3.10 transform\_to\_string()

```
std::string hocon::config_number::transform_to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

### 7.35.3.11 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

### 7.35.3.12 value\_type()

```
config_value::type hocon::config_number::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

#### Returns

value's type

Implements [hocon::config\\_value](#).

### 7.35.3.13 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

#### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.35.3.14 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.35.3.15 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (  
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

## 7.35.4 Member Data Documentation

### 7.35.4.1 \_original\_text

```
std::string hocon::config_number::_original_text [protected]
```

Definition at line 35 of file [config\\_number.hpp](#).


The documentation for this class was generated from the following file:

- `internal/values/config_number.hpp`



## 7.36 hocon::config\_object Class Reference

Inheritance diagram for hocon::config\_object:

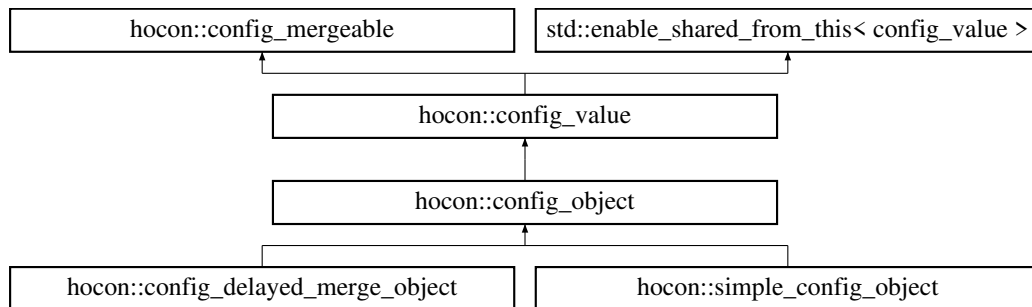

### Public Types

- using `iterator` = `std::unordered_map< std::string, shared_value >::const_iterator`
- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the `JSON` type schema).*

### Public Member Functions

- virtual `std::shared_ptr< const config > to_config () const`  
*Converts this object to a `Config` instance, enabling you to use path expressions to find values in the object.*
- `config_object` (shared\_origin `origin`)
- `config_value::type value_type () const` override  
*The type of the value; matches the `JSON` type schema.*
- virtual shared\_object **with\_value** (`path` raw\_path, shared\_value `value`) const =0
- virtual shared\_object **with\_value** (std::string key, shared\_value `value`) const =0
- virtual shared\_value **attempt\_peek\_with\_partial\_resolve** (std::string const &key) const =0  
*Look up the key on an only-partially-resolved object, with no transformation or type conversion of any kind; if 'this' is not resolved then try to look up the key anyway if possible.*
- virtual std::vector< std::string > **key\_set** () const =0  
*Construct a list of keys in the \_value map.*
- virtual bool **is\_empty** () const =0
- virtual size\_t **size** () const =0
- virtual shared\_value **operator[]** (std::string const &key) const =0
- virtual shared\_value **get** (std::string const &key) const =0
- virtual iterator **begin** () const =0
- virtual iterator **end** () const =0
- virtual shared\_origin const & **origin** () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* **value\_type\_name** () const  
*The printable name of the value type.*
- virtual unwrapped\_value **unwrapped** () const =0
- virtual std::string **render** () const  
*Renders the config value as a `HOCON` string.*
- virtual std::string **render** (`config_render_options` options) const

- Renders the config value to a string, using the provided options.*

  - shared\_config **at\_key** (std::string const &key) const

*Places the value inside a [config](#) at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const

*Places the value inside a [config](#) at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin [origin](#)) const

*Returns a [config\\_value](#) based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const

*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status **get\_resolve\_status** () const
- std::shared\_ptr< const [config\\_mergeable](#) > **with\_fallback** (std::shared\_ptr< const [config\\_mergeable](#) > other) const override

*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- virtual bool **operator==** ([config\\_value](#) const &other) const =0
- virtual std::string **transform\_to\_string** () const

## Static Public Member Functions

- static char const \* **type\_name** (type t)

## Protected Member Functions

- shared\_value **peek\_path** ([path](#) desired\_path) const
  - shared\_value **peek\_assuming\_resolved** (std::string const &key, [path](#) original\_path) const
  - virtual shared\_object **new\_copy** (resolve\_status const &status, shared\_origin [origin](#)) const =0
  - shared\_value **new\_copy** (shared\_origin [origin](#)) const override
  - shared\_value **construct\_delayed\_merge** (shared\_origin [origin](#), std::vector< shared\_value > stack) const override
  - virtual std::unordered\_map< std::string, shared\_value > const & **entry\_set** () const =0
  - virtual shared\_object **without\_path** ([path](#) raw\_path) const =0
  - virtual shared\_object **with\_only\_path** ([path](#) raw\_path) const =0
  - virtual shared\_object **with\_only\_path\_or\_null** ([path](#) raw\_path) const =0
  - virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const
  - virtual void **render** (std::string &result, int indent, bool at\_root, [config\\_render\\_options](#) options) const
  - shared\_config **at\_key** (shared\_origin [origin](#), std::string const &key) const
  - shared\_config **at\_path** (shared\_origin [origin](#), [path](#) raw\_path) const
  - virtual [resolve\\_result](#)< shared\_value > **resolve\_substitutions** ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const
  - void **require\_not\_ignoring\_fallbacks** () const
  - virtual bool **ignores\_fallbacks** () const
  - virtual shared\_value **with\_fallbacks\_ignored** () const
  - shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
  - shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const [unmergeable](#) > fallback) const
  - shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
  - virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
  - shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
  - shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
  - shared\_value **to\_fallback\_value** () const override
- Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static shared\_value **peek\_path** (const [config\\_object](#) \*self, [path](#) desired\_path)
- static shared\_origin **merge\_origins** (std::vector< shared\_value > const &stack)
- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

## Friends

- class [config](#)
- class [config\\_value](#)
- class [simple\\_config\\_object](#)
- class [resolve\\_source](#)
- class [config\\_delayed\\_merge\\_object](#)

### 7.36.1 Detailed Description

Definition at line 11 of file [config\\_object.hpp](#).

### 7.36.2 Member Typedef Documentation

#### 7.36.2.1 iterator

```
using hocon::config_object::iterator = std::unordered_map<std::string, shared_value>::const_iterator
```

Definition at line 55 of file [config\\_object.hpp](#).

### 7.36.3 Member Enumeration Documentation

#### 7.36.3.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

## 7.36.4 Member Function Documentation

### 7.36.4.1 `at_key()`

```
shared_config hocon::config_value::at_key (
    std::string const & key ) const [inherited]
```

Places the value inside a `config` at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a `config` instance containing this value at the given key.

### 7.36.4.2 `at_path()`

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a `config` at the given path.

See also `config_value#at_key(String)`.

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a `config` instance containing this value at the given path.

### 7.36.4.3 `attempt_peek_with_partial_resolve()`

```
virtual shared_value hocon::config_object::attempt_peek_with_partial_resolve (
    std::string const & key ) const [pure virtual]
```

Look up the key on an only-partially-resolved object, with no transformation or type conversion of any kind; if 'this' is not resolved then try to look up the key anyway if possible.

## Parameters

<i>key</i>	key to look up
------------	----------------

## Returns

the value of the key, or null if known not to exist

## Exceptions

<a href="#"><i>config_exception</i></a>	if can't figure out key's value (or existence) without more resolving
-----------------------------------------	-----------------------------------------------------------------------

Implemented in [hocon::config\\_delayed\\_merge\\_object](#), and [hocon::simple\\_config\\_object](#).

**7.36.4.4 construct\_delayed\_merge()**

```
shared_value hocon::config_object::construct_delayed_merge (
    shared_origin origin,
    std::vector< shared_value > stack ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.36.4.5 equals()**

```
template<typename T >
static bool hocon::config_value::equals (
    config\_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

**7.36.4.6 key\_set()**

```
virtual std::vector< std::string > hocon::config_object::key_set ( ) const [pure virtual]
```

Construct a list of keys in the `_value` map.

Use a vector rather than set, because most of the time we just want to iterate over them.

Implemented in [hocon::config\\_delayed\\_merge\\_object](#), and [hocon::simple\\_config\\_object](#).

#### 7.36.4.7 new\_copy()

```
shared_value hocon::config_object::new_copy (
    shared_origin origin ) const    [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.36.4.8 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const    [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

##### Returns

where the value came from

#### 7.36.4.9 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const    [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at `foo.bar` in the parent, and the included file as a substitution `${a.b.c}`, the included substitution now needs to be `${foo.bar.a.b.c}` because we resolve substitutions globally only after parsing everything.

##### Parameters

<i>prefix</i>	
---------------	--

##### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.36.4.10 render() [1/2]**

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.36.4.11 render() [2/2]**

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.36.4.12 to\_config()**

```
virtual std::shared_ptr< const config > hocon::config_object::to_config ( ) const [virtual]
```

Converts this object to a `Config` instance, enabling you to use path expressions to find values in the object.

This is a constant-time operation (it is not proportional to the size of the object).

**Returns**

a `Config` with this object as its root

**7.36.4.13 to\_fallback\_value()**

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual], [inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

**7.36.4.14 type\_name()**

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

**7.36.4.15 value\_type()**

```
config_value::type hocon::config_object::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

**Returns**

value's type

Implements [hocon::config\\_value](#).

**7.36.4.16 value\_type\_name()**

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

**Returns**

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).



#### 7.36.4.17 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

##### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

##### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

#### 7.36.4.18 with\_only\_path\_or\_null()

```
virtual shared_object hocon::config_object::with_only_path_or_null (
    path raw_path ) const [protected], [pure virtual]
```

Implemented in [hocon::simple\\_config\\_object](#).

#### 7.36.4.19 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const    [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

##### Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

##### Returns

the new [config\\_value](#) with the given origin

### 7.36.5 Friends And Related Function Documentation

#### 7.36.5.1 config

```
friend class config    [friend]
```

Definition at line 12 of file [config\\_object.hpp](#).

#### 7.36.5.2 config\_delayed\_merge\_object

```
friend class config\_delayed\_merge\_object    [friend]
```

Definition at line 16 of file [config\\_object.hpp](#).

#### 7.36.5.3 config\_value

```
friend class config\_value    [friend]
```

Definition at line 13 of file [config\\_object.hpp](#).

### 7.36.5.4 resolve\_source

```
friend class resolve_source [friend]
```

Definition at line 15 of file [config\\_object.hpp](#).

### 7.36.5.5 simple\_config\_object

```
friend class simple_config_object [friend]
```

Definition at line 14 of file [config\\_object.hpp](#).

The documentation for this class was generated from the following file:


- [hocon/config\\_object.hpp](#)

## 7.37 hocon::config\_origin Class Reference

Represents the origin (such as filename and line number) of a [config\\_value](#) for use in error messages.

```
#include <config_origin.hpp>
```

Inheritance diagram for hocon::config\_origin:



### Public Member Functions

- virtual LIBCPP\_HOCON\_EXPORT std::string const & [description](#) () const =0  
*Returns a string describing the origin of a value or exception.*
- virtual LIBCPP\_HOCON\_EXPORT shared\_origin [with\\_line\\_number](#) (int [line\\_number](#)) const =0  
*Returns a ConfigOrigin based on this one, but with the given line number.*
- virtual LIBCPP\_HOCON\_EXPORT int [line\\_number](#) () const =0  
*Returns a line number where the value or exception originated.*
- virtual LIBCPP\_HOCON\_EXPORT std::vector< std::string > const & [comments](#) () const =0  
*Returns any comments that appeared to "go with" this place in the file.*
- virtual LIBCPP\_HOCON\_EXPORT shared\_origin [with\\_comments](#) (std::vector< std::string > [comments](#)) const =0  
*Returns a config\_origin based on this one, but with the given comments.*

### 7.37.1 Detailed Description

Represents the origin (such as filename and line number) of a [config\\_value](#) for use in error messages.

Obtain the origin of a value with [config\\_value#origin](#). Exceptions may have an origin, see [config\\_exception#origin](#), but be careful because [config\\_exception.origin\(\)](#) may return null.

It's best to use this interface only for debugging; its accuracy is "best effort" rather than guaranteed, and a potentially-noticeable amount of memory could probably be saved if origins were not kept around, so in the future there might be some option to discard origins.

*Do not implement this interface*; it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.

Definition at line 31 of file [config\\_origin.hpp](#).

### 7.37.2 Member Function Documentation

#### 7.37.2.1 comments()

```
virtual LIBCPP_HOCON_EXPORT std::vector< std::string > const & hocon::config_origin::comments
( ) const [pure virtual]
```

Returns any comments that appeared to "go with" this place in the file.

Often an empty list, but never null. The details of this are subject to change, but at the moment comments that are immediately before an array element or object field, with no blank line after the comment, "go with" that element or field.

#### Returns

any comments that seemed to "go with" this origin, empty list if none

Implemented in [hocon::simple\\_config\\_origin](#).

#### 7.37.2.2 description()

```
virtual LIBCPP_HOCON_EXPORT std::string const & hocon::config_origin::description ( ) const
[pure virtual]
```

Returns a string describing the origin of a value or exception.

This will never return null.

#### Returns

string describing the origin

Implemented in [hocon::simple\\_config\\_origin](#).

### 7.37.2.3 line\_number()

```
virtual LIBCPP_HOCON_EXPORT int hocon::config_origin::line_number ( ) const [pure virtual]
```

Returns a line number where the value or exception originated.

This will return -1 if there's no meaningful line number.

#### Returns

line number or -1 if none is available

Implemented in [hocon::simple\\_config\\_origin](#).

### 7.37.2.4 with\_comments()

```
virtual LIBCPP_HOCON_EXPORT shared_origin hocon::config_origin::with_comments (
    std::vector< std::string > comments ) const [pure virtual]
```

Returns a `config_origin` based on this one, but with the given comments.

Does not modify this instance or any `config_values` with this origin (since they are immutable). To set the returned origin to a `config_value`, use [config\\_value#with\\_origin](#).

Note that when the given comments are equal to the comments on this object, a new instance may not be created and `this` is returned directly.

#### Since

1.3.0

#### Parameters

<i>comments</i>	the comments used on the returned origin
-----------------	------------------------------------------

#### Returns

the [config\\_origin](#) with the given comments

Implemented in [hocon::simple\\_config\\_origin](#).

### 7.37.2.5 with\_line\_number()

```
virtual LIBCPP_HOCON_EXPORT shared_origin hocon::config_origin::with_line_number (
    int line_number ) const [pure virtual]
```

Returns a `ConfigOrigin` based on this one, but with the given line number.

This origin must be a `FILE`, `URL` or `RESOURCE`. Does not modify this instance or any `ConfigValue`s with this origin (since they are immutable). To set the returned origin to a `ConfigValue`, use `ConfigValue#withOrigin`.

Note that when the given `lineNumber` are equal to the `lineNumber` on this object, a new instance may not be created and `this` is returned directly.

Since

1.3.0

Parameters

<i>lineNumber</i>	the new line number
-------------------	---------------------

Returns

the created `ConfigOrigin`

Implemented in [hocon::simple\\_config\\_origin](#).

The documentation for this class was generated from the following file:

- `hocon/config_origin.hpp`

## 7.38 hocon::config\_parse\_options Class Reference

A set of options related to parsing.

```
#include <config_parse_options.hpp>
```

### Public Member Functions

- [config\\_parse\\_options](#) ()  
*Gets an instance of [config\\_parse\\_options](#) with all fields set to the default values.*
- [config\\_parse\\_options set\\_syntax](#) (config\_syntax syntax) const  
*Set the file format.*
- config\_syntax const & [get\\_syntax](#) () const  
*Gets the current syntax option.*
- [config\\_parse\\_options set\\_origin\\_description](#) (shared\_string origin\_description) const  
*Set a description for the thing being parsed.*
- shared\_string const & [get\\_origin\\_description](#) () const  
*Gets the current origin description, which may be null for "automatic".*
- [config\\_parse\\_options set\\_allow\\_missing](#) (bool allow\_missing) const  
*Set to false to throw an exception if the item being parsed (for example a file) is missing.*
- bool [get\\_allow\\_missing](#) () const  
*Gets the current "allow missing" flag.*

- [config\\_parse\\_options set\\_includer](#) (shared\_includer includer) const  
*Set a [config\\_includer](#) which customizes how includes are handled.*
- [config\\_parse\\_options prepend\\_includer](#) (shared\_includer includer) const  
*Prepends a [config\\_includer](#) which customizes how includes are handled.*
- [config\\_parse\\_options append\\_includer](#) (shared\_includer includer) const  
*Appends a [config\\_includer](#) which customizes how includes are handled.*
- shared\_includer const & [get\\_includer](#) () const  
*Gets the current includer (will be null for the default includer).*

## Static Public Member Functions

- static [config\\_parse\\_options defaults](#) ()  
*Gets an instance of `ConfigParseOptions` with all fields set to the default values.*

### 7.38.1 Detailed Description

A set of options related to parsing.

This object is immutable, so the "setters" return a new object.

Here is an example of creating a custom `config_parse_options`:

```
config_parse_options options = config_parse_options()
    .set_syntax(config_syntax.JSON)
    .set_allow_missing(false)
```

ClassLoader is Java-specific, so it was not ported to C++.

Definition at line 25 of file [config\\_parse\\_options.hpp](#).

### 7.38.2 Constructor & Destructor Documentation

#### 7.38.2.1 config\_parse\_options()

```
hocon::config_parse_options::config_parse_options ( )
```

Gets an instance of [config\\_parse\\_options](#) with all fields set to the default values.

Start with this instance and make any changes you need.

Returns

the default parse options

### 7.38.3 Member Function Documentation

#### 7.38.3.1 append\_includer()

```
config_parse_options hocon::config_parse_options::append_includer (
    shared_includer includer ) const
```

Appends a [config\\_includer](#) which customizes how includes are handled.

To append, the library calls [config\\_includer#with\\_fallback](#) on the existing includer.

**Parameters**

<i>includer</i>	the includer to append (may not be null)
-----------------	------------------------------------------

**Returns**

new version of the parse options with different includer

**7.38.3.2 defaults()**

```
static config_parse_options hocon::config_parse_options::defaults ( ) [static]
```

Gets an instance of ConfigParseOptions with all fields set to the default values.

Start with this instance and make any changes you need.

**Returns**

the default parse options

**7.38.3.3 get\_allow\_missing()**

```
bool hocon::config_parse_options::get_allow_missing ( ) const
```

Gets the current "allow missing" flag.

**Returns**

whether we allow missing files

**7.38.3.4 get\_includer()**

```
shared_includer const & hocon::config_parse_options::get_includer ( ) const
```

Gets the current includer (will be null for the default includer).

**Returns**

current includer or null



### 7.38.3.5 get\_origin\_description()

```
shared_string const & hocon::config_parse_options::get_origin_description ( ) const
```

Gets the current origin description, which may be null for "automatic".

#### Returns

the current origin description or null

### 7.38.3.6 get\_syntax()

```
config_syntax const & hocon::config_parse_options::get_syntax ( ) const
```

Gets the current syntax option.

### 7.38.3.7 prepend\_includer()

```
config_parse_options hocon::config_parse_options::prepend_includer (
    shared_includer includer ) const
```

Prepends a [config\\_includer](#) which customizes how includes are handled.

To prepend your includer, the library calls [config\\_includer#with\\_fallback](#) on your includer to append the existing includer to it.

#### Parameters

<i>includer</i>	the includer to prepend (may not be null)
-----------------	-------------------------------------------

#### Returns

new version of the parse options with different includer

### 7.38.3.8 set\_allow\_missing()

```
config_parse_options hocon::config_parse_options::set_allow_missing (
    bool allow_missing ) const
```

Set to false to throw an exception if the item being parsed (for example a file) is missing.

Set to true to just return an empty document in that case.

**Parameters**

<i>allow_missing</i>	true to silently ignore missing item
----------------------	--------------------------------------

**Returns**

options with the "allow missing" flag set

**7.38.3.9 set\_includer()**

```
config_parse_options hocon::config_parse_options::set_includer (
    shared_includer includer ) const
```

Set a [config\\_includer](#) which customizes how includes are handled.

null means to use the default includer.

**Parameters**

<i>includer</i>	the includer to use or null for default
-----------------	-----------------------------------------

**Returns**

new version of the parse options with different includer

**7.38.3.10 set\_origin\_description()**

```
config_parse_options hocon::config_parse_options::set_origin_description (
    shared_string origin_description ) const
```

Set a description for the thing being parsed.

In most cases this will be set up for you to something like the filename, but if you provide just an input stream you might want to improve on it. Set to null to allow the library to come up with something automatically. This description is the basis for the [config\\_origin](#) of the parsed values.

**Parameters**

<i>origin_description</i>	description to put in the <a href="#">config_origin</a>
---------------------------	---------------------------------------------------------

**Returns**

options with the origin description set

## 7.38.3.11 set\_syntax()

```
config_parse_options hocon::config_parse_options::set_syntax (
    config_syntax syntax ) const
```

Set the file format.

If set to null, try to guess from any available filename extension; if guessing fails, assume `config_syntax#CONF`.

## Parameters

<i>syntax</i>	a syntax or <code>nullptr</code> for best guess
---------------	-------------------------------------------------

## Returns

options with the syntax set

The documentation for this class was generated from the following file:


- `hocon/config_parse_options.hpp`

## 7.39 hocon::config\_parseable Class Reference

An opaque handle to something that can be parsed, obtained from `config_include_context`.

```
#include <config_parseable.hpp>
```

Inheritance diagram for `hocon::config_parseable`:

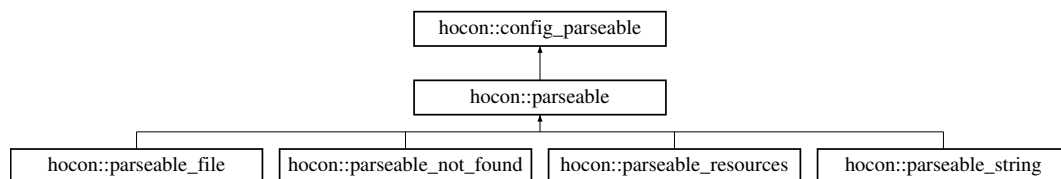

## Public Member Functions

- virtual shared\_object `parse` (`config_parse_options` const &`options`) const =0  
*Parse whatever it is.*
- virtual shared\_origin `origin` () const =0  
*Returns a `config_origin` describing the origin of the parseable item.*
- virtual `config_parse_options` const & `options` () const =0  
*Get the initial options, which can be modified then passed to `parse()`.*

### 7.39.1 Detailed Description

An opaque handle to something that can be parsed, obtained from [config\\_include\\_context](#).

*Do not implement this interface*; it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.

Definition at line 19 of file [config\\_parseable.hpp](#).

### 7.39.2 Member Function Documentation

#### 7.39.2.1 options()

```
virtual config\_parse\_options const & hocon::config_parseable::options ( ) const [pure virtual]
```

Get the initial options, which can be modified then passed to [parse\(\)](#).

These options will have the right description, includer, and other parameters already set up.

##### Returns

the initial options

Implemented in [hocon::parseable](#).

#### 7.39.2.2 origin()

```
virtual shared_origin hocon::config_parseable::origin ( ) const [pure virtual]
```

Returns a [config\\_origin](#) describing the origin of the parseable item.

Implemented in [hocon::parseable](#).

#### 7.39.2.3 parse()

```
virtual shared_object hocon::config_parseable::parse (
    config\_parse\_options const & options ) const [pure virtual]
```

Parse whatever it is.

The options should come from [config\\_parseable#options\(\)](#) but you could tweak them if you like.

## Parameters

<code>options</code>	parse options, should be based on the ones from <code>config_parseable#options()</code>
----------------------	-----------------------------------------------------------------------------------------

## Returns

the parsed object


Implemented in [hocon::parseable](#).

The documentation for this class was generated from the following file:

- `hocon/config_parseable.hpp`

## 7.40 hocon::config\_reference Class Reference

Inheritance diagram for `hocon::config_reference`:

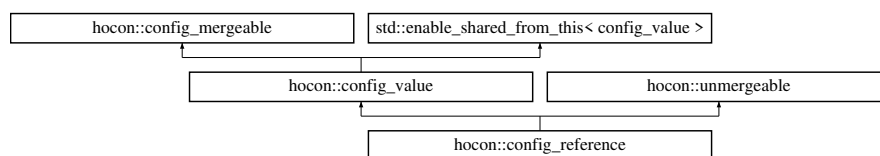

### Public Types

- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

### Public Member Functions

- `config_reference` (shared\_origin [origin](#), std::shared\_ptr< [substitution\\_expression](#) > `expr`, int `prefix_↵` length=0)
- `type_value_type` () const override  
*The type of the value; matches the JSON type schema.*
- std::vector< shared\_value > `unmerged_values` () const override
- resolve\_status `get_resolve_status` () const override
- unwrapped\_value `unwrapped` () const override
- std::shared\_ptr< [substitution\\_expression](#) > `expression` () const
- bool `operator==` (config\_value const &other) const override
- virtual shared\_origin const & `origin` () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* `value_type_name` () const  
*The printable name of the value type.*
- virtual std::string `render` () const  
*Renders the config value as a HOCON string.*

- virtual std::string **render** (config\_render\_options options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config **at\_key** (std::string const &key) const  
*Places the value inside a [config](#) at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const  
*Places the value inside a [config](#) at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin origin) const  
*Returns a [config\\_value](#) based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- std::shared\_ptr< const [config\\_mergeable](#) > **with\_fallback** (std::shared\_ptr< const [config\\_mergeable](#) > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- virtual std::string **transform\_to\_string** () const

## Static Public Member Functions

- static char const \* **type\_name** (type t)

## Protected Member Functions

- shared\_value **new\_copy** (shared\_origin origin) const override
- [resolve\\_result](#)< shared\_value > **resolve\_substitutions** ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const override
- bool **ignores\_fallbacks** () const override
- void **render** (std::string &s, int indent, bool at\_root, [config\\_render\\_options](#) options) const override
- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const
- shared\_config **at\_path** (shared\_origin origin, [path](#) raw\_path) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const [unmergeable](#) > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin origin, std::vector< shared\_value > stack) const
- shared\_value **to\_fallback\_value** () const override  
*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.40.1 Detailed Description

Definition at line 10 of file [config\\_reference.hpp](#).

### 7.40.2 Member Enumeration Documentation

#### 7.40.2.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.40.3 Member Function Documentation

#### 7.40.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also [config\\_value#at\\_path\(string\)](#).

##### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

##### Returns

a [config](#) instance containing this value at the given key.

#### 7.40.3.2 at\_path()

```
shared_config hocon::config_value::at_path (  
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also [config\\_value#at\\_key\(String\)](#).

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a `config` instance containing this value at the given path.

#### 7.40.3.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

#### 7.40.3.4 get\_resolve\_status()

```
resolve_status hocon::config_reference::get_resolve_status ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.40.3.5 ignores\_fallbacks()

```
bool hocon::config_reference::ignores_fallbacks ( ) const [inline], [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

Definition at line 31 of file [config\\_reference.hpp](#).

#### 7.40.3.6 new\_copy()

```
shared_value hocon::config_reference::new_copy (
    shared_origin origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).



### 7.40.3.7 operator==( )

```
bool hocon::config_reference::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.40.3.8 origin( )

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.40.3.9 relativized( )

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.40.3.10 render()** [1/3]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.40.3.11 render()** [2/3]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.40.3.12 render()** [3/3]

```
void hocon::config_reference::render (
    std::string & s,
    int indent,
```

```
bool at_root,  
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.40.3.13 resolve\_substitutions()

```
resolve_result< shared_value > hocon::config_reference::resolve_substitutions (  
    resolve_context const & context,  
    resolve_source const & source ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.40.3.14 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],  
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.40.3.15 type\_name()

```
static char const * hocon::config_value::type_name (  
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.40.3.16 unmerged\_values()

```
std::vector< shared_value > hocon::config_reference::unmerged_values ( ) const [override],  
[virtual]
```

Implements [hocon::unmergeable](#).

#### 7.40.3.17 unwrapped()

```
unwrapped_value hocon::config_reference::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.40.3.18 value\_type()

```
type hocon::config_reference::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implements [hocon::config\\_value](#).

#### 7.40.3.19 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

##### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.40.3.20 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

#### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

#### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.40.3.21 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

The documentation for this class was generated from the following file:

- internal/values/config\_reference.hpp

## 7.41 hocon::config\_render\_options Class Reference

```
#include <config_render_options.hpp>
```

### Public Member Functions

- [config\\_render\\_options](#) (bool origin\_comments=true, bool comments=true, bool formatted=true, bool json=true)  
*Leaving the default arguments will result in a verbose rendering, which contains comments and therefore is not valid JSON.*
- [config\\_render\\_options set\\_comments](#) (bool value)  
*Returns options with comments toggled.*
- bool [get\\_comments](#) () const  
*Returns whether the options enable comments.*
- [config\\_render\\_options set\\_origin\\_comments](#) (bool value)  
*Returns options with origin comments toggled.*
- bool [get\\_origin\\_comments](#) () const  
*Returns whether the options enable automated origin comments.*
- [config\\_render\\_options set\\_formatted](#) (bool value)  
*Returns options with formatting toggled.*
- bool [get\\_formatted](#) () const  
*Returns whether the options enable formatting.*
- [config\\_render\\_options set\\_json](#) (bool value)  
*Returns options with JSON toggled.*
- bool [get\\_json](#) () const  
*Returns whether the options enable JSON.*

### Static Public Member Functions

- static [config\\_render\\_options concise](#) ()  
*Returns concise render options (no whitespace or comments).*

### 7.41.1 Detailed Description

A set of options related to rendering a [config\\_value](#). Passed to `config_value#render(config_render_options)`.

Here is an example of creating a `config_render_options`:

```
config_render_options options =  
    config_render_options().set_comments(false)
```

Definition at line 20 of file [config\\_render\\_options.hpp](#).

### 7.41.2 Constructor & Destructor Documentation

#### 7.41.2.1 config\_render\_options()

```
hocon::config_render_options::config_render_options (  
    bool origin_comments = true,  
    bool comments = true,  
    bool formatted = true,  
    bool json = true )
```

Leaving the default arguments will result in a verbose rendering, which contains comments and therefore is not valid JSON.

See [config\\_render\\_options#concise](#) for stripped-down options.

### 7.41.3 Member Function Documentation

#### 7.41.3.1 concise()

```
static config_render_options hocon::config_render_options::concise ( ) [static]
```

Returns concise render options (no whitespace or comments).

For a resolved [config](#), the concise rendering will be valid JSON.

#### Returns

the concise render options



### 7.41.3.2 get\_comments()

```
bool hocon::config_render_options::get_comments ( ) const
```

Returns whether the options enable comments.

This method is mostly used by the config lib internally, not by applications.

Returns

true if comments should be rendered

### 7.41.3.3 get\_formatted()

```
bool hocon::config_render_options::get_formatted ( ) const
```

Returns whether the options enable formatting.

This method is mostly used by the config lib internally, not by applications.

Returns

true if the options enable formatting

### 7.41.3.4 get\_json()

```
bool hocon::config_render_options::get_json ( ) const
```

Returns whether the options enable JSON.

This method is mostly used by the config lib internally, not by applications.

Returns

true if only JSON should be rendered

### 7.41.3.5 get\_origin\_comments()

```
bool hocon::config_render_options::get_origin_comments ( ) const
```

Returns whether the options enable automated origin comments.

This method is mostly used by the config lib internally, not by applications.

Returns

true if origin comments should be rendered

### 7.41.3.6 set\_comments()

```
config_render_options hocon::config_render_options::set_comments (
    bool value )
```

Returns options with comments toggled.

This controls human-written comments but not the autogenerated "origin of this setting" comments, which are controlled by [config\\_render\\_options#set\\_origin\\_comments](#).

**Parameters**

<i>value</i>	true to include comments in the render
--------------	----------------------------------------

**Returns**

options with requested setting for comments

**7.41.3.7 set\_formatted()**

```
config_render_options hocon::config_render_options::set_formatted (
    bool value )
```

Returns options with formatting toggled.

Formatting means indentation and whitespace, enabling formatting makes things prettier but larger.

**Parameters**

<i>value</i>	true to enable formatting
--------------	---------------------------

**Returns**

options with requested setting for formatting

**7.41.3.8 set\_json()**

```
config_render_options hocon::config_render_options::set_json (
    bool value )
```

Returns options with JSON toggled.

JSON means that HOCON extensions (omitting commas, quotes for example) won't be used. However, whether to use comments is controlled by the separate `set_comments (boolean)` and `set_origin_comments (boolean)` options. So if you enable comments you will get invalid JSON despite setting this to true.

**Parameters**

<i>value</i>	true to include non-JSON extensions in the render
--------------	---------------------------------------------------

**Returns**

options with requested setting for JSON

### 7.41.3.9 set\_origin\_comments()

```
config_render_options hocon::config_render_options::set_origin_comments (
    bool value )
```

Returns options with origin comments toggled.

If this is enabled, the library generates comments for each setting based on the `config_value#origin` of that setting's value. For example these comments might tell you which file a setting comes from.

`set_origin_comments()` controls only these autogenerated "origin of this setting" comments, to toggle regular comments use `config_render_options#set_comments`.

#### Parameters

<i>value</i>	true to include autogenerated setting-origin comments in the render
--------------	---------------------------------------------------------------------

#### Returns

options with origin comments toggled

The documentation for this class was generated from the following file:

- `hocon/config_render_options.hpp`

## 7.42 hocon::config\_resolve\_options Class Reference

A set of options related to resolving substitutions.

```
#include <config_resolve_options.hpp>
```

### Public Member Functions

- `config_resolve_options` (bool use\_system\_environment=true, bool allow\_unresolved=false)  
*Returns the default resolve options.*
- `config_resolve_options set_use_system_environment` (bool *value*) const  
*Returns resolve options that disable any reference to "system" data (currently, this means environment variables).*
- bool `get_use_system_environment` () const  
*Returns whether the options enable use of system environment variables.*
- `config_resolve_options set_allow_unresolved` (bool *value*) const  
*Returns options with "allow unresolved" set to the given value.*
- bool `get_allow_unresolved` () const  
*Returns whether the options allow unresolved substitutions.*

### 7.42.1 Detailed Description

A set of options related to resolving substitutions.

Substitutions use the `${foo.bar}` syntax and are documented in the [HOCON](#) spec.

Typically this class would be used with the method `config#resolve(config_resolve_options)`.

This object is immutable, so the "setters" return a new object.

Here is an example of creating a custom `config_resolve_options`:

```
config_resolve_options options = config_resolve_options()
    .set_use_system_environment(false)
```

<p><blockquote>

In addition to `config_resolve_options`, there's a prebuilt `config_resolve_options#no_system` which avoids looking at any system environment variables or other external system information. (Right now, environment variables are the only example.)

Definition at line 30 of file [config\\_resolve\\_options.hpp](#).

### 7.42.2 Constructor & Destructor Documentation

#### 7.42.2.1 config\_resolve\_options()

```
hocon::config_resolve_options::config_resolve_options (
    bool use_system_environment = true,
    bool allow_unresolved = false )
```

Returns the default resolve options.

By default the system environment will be used and unresolved substitutions are not allowed.

Returns

the default resolve options

### 7.42.3 Member Function Documentation

### 7.42.3.1 get\_allow\_unresolved()

```
bool hocon::config_resolve_options::get_allow_unresolved ( ) const
```

Returns whether the options allow unresolved substitutions.

This method is mostly used by the config lib internally, not by applications.

#### Returns

true if unresolved substitutions are allowed

### 7.42.3.2 get\_use\_system\_environment()

```
bool hocon::config_resolve_options::get_use_system_environment ( ) const
```

Returns whether the options enable use of system environment variables.

This method is mostly used by the config lib internally, not by applications.

#### Returns

true if environment variables should be used

### 7.42.3.3 set\_allow\_unresolved()

```
config_resolve_options hocon::config_resolve_options::set_allow_unresolved (
    bool value ) const
```

Returns options with "allow unresolved" set to the given value.

By default, unresolved substitutions are an error. If unresolved substitutions are allowed, then a future attempt to use the unresolved value may fail, but `config#resolve(config_resolve_options)` itself will not throw.

#### Parameters

<i>value</i>	true to silently ignore unresolved substitutions.
--------------	---------------------------------------------------

#### Returns

options with requested setting for whether to allow substitutions

### 7.42.3.4 set\_use\_system\_environment()

```
config_resolve_options hocon::config_resolve_options::set_use_system_environment (
    bool value ) const
```

Returns resolve options that disable any reference to "system" data (currently, this means environment variables).

#### Returns


the resolve options with env variables disabled

The documentation for this class was generated from the following file:

- hocon/config\_resolve\_options.hpp

## 7.43 hocon::config\_string Class Reference

Inheritance diagram for hocon::config\_string:

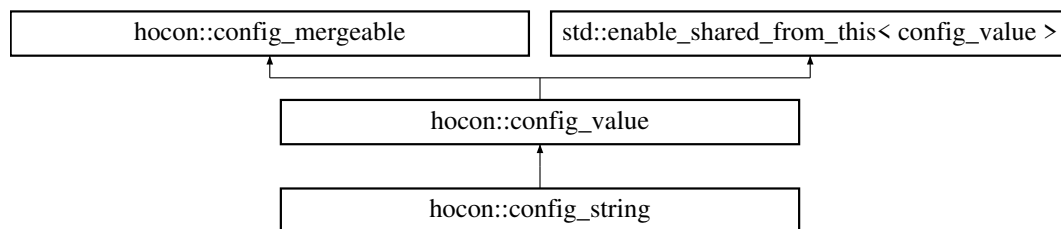

### Public Types

- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }  
*The type of a configuration value (following the [JSON](#) type schema).*

### Public Member Functions

- **config\_string** (shared\_origin `origin`, std::string text, config\_string\_type quoted)
- `config_value::type value_type` () const override  
*The type of the value; matches the JSON type schema.*
- std::string `transform_to_string` () const override
- unwrapped\_value `unwrapped` () const override
- bool **was\_quoted** () const
- bool `operator==` (config\_value const &other) const override
- virtual shared\_origin const & `origin` () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* `value_type_name` () const  
*The printable name of the value type.*
- virtual std::string `render` () const

- Renders the config value as a HOCON string.*
- virtual std::string **render** (config\_render\_options options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config **at\_key** (std::string const &key) const  
*Places the value inside a `config` at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const  
*Places the value inside a `config` at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin origin) const  
*Returns a `config_value` based on this one, but with the given origin.*
- virtual shared\_value **relativized** (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status **get\_resolve\_status** () const
- std::shared\_ptr< const config\_mergeable > **with\_fallback** (std::shared\_ptr< const config\_mergeable > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*

## Static Public Member Functions

- static char const \* **type\_name** (type t)

## Protected Member Functions

- shared\_value **new\_copy** (shared\_origin) const override
- void **render** (std::string &s, int indent, bool at\_root, config\_render\_options options) const override
- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, config\_render\_options options) const
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const
- shared\_config **at\_path** (shared\_origin origin, path raw\_path) const
- virtual **resolve\_result**< shared\_value > **resolve\_substitutions** (resolve\_context const &context, resolve\_source const &source) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual bool **ignores\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const unmergeable > fallback) const
- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin origin, std::vector< shared\_value > stack) const
- shared\_value **to\_fallback\_value** () const override  
*Converts a config to its root object and a `config_value` to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.43.1 Detailed Description

Definition at line 10 of file [config\\_string.hpp](#).

### 7.43.2 Member Enumeration Documentation

#### 7.43.2.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.43.3 Member Function Documentation

#### 7.43.3.1 at\_key()

```
shared_config hocon::config_value::at_key (
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also `config_value#at_path(string)`.

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a `config` instance containing this value at the given key.



### 7.43.3.2 at\_path()

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a [config](#) at the given path.

See also `config_value#at_key (String)`.

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a `config` instance containing this value at the given path.

### 7.43.3.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

### 7.43.3.4 new\_copy()

```
shared_value hocon::config_string::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.43.3.5 operator==()

```
bool hocon::config_string::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

### 7.43.3.6 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.43.3.7 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at `foo.bar` in the parent, and the included file as a substitution `${a.b.c}`, the included substitution now needs to be `${foo.bar.a.b.c}` because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

### 7.43.3.8 render() [1/3]

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

#### Returns

the rendered value

**7.43.3.9 render()** [2/3]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.43.3.10 render()** [3/3]

```
void hocon::config_string::render (
    std::string & s,
    int indent,
    bool at_root,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.43.3.11 to\_fallback\_value()**

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.43.3.12 transform\_to\_string()

```
std::string hocon::config_string::transform_to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.43.3.13 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.43.3.14 unwrapped()

```
unwrapped_value hocon::config_string::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.43.3.15 value\_type()

```
config_value::type hocon::config_string::value_type ( ) const [override], [virtual]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implements [hocon::config\\_value](#).

#### 7.43.3.16 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

##### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.43.3.17 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

#### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

#### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.43.3.18 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

The documentation for this class was generated from the following file:


- `internal/values/config_string.hpp`

## 7.44 hocon::config\_value Class Reference

An immutable value, following the [JSON](#) type schema.

```
#include <config_value.hpp>
```

Inheritance diagram for `hocon::config_value`:

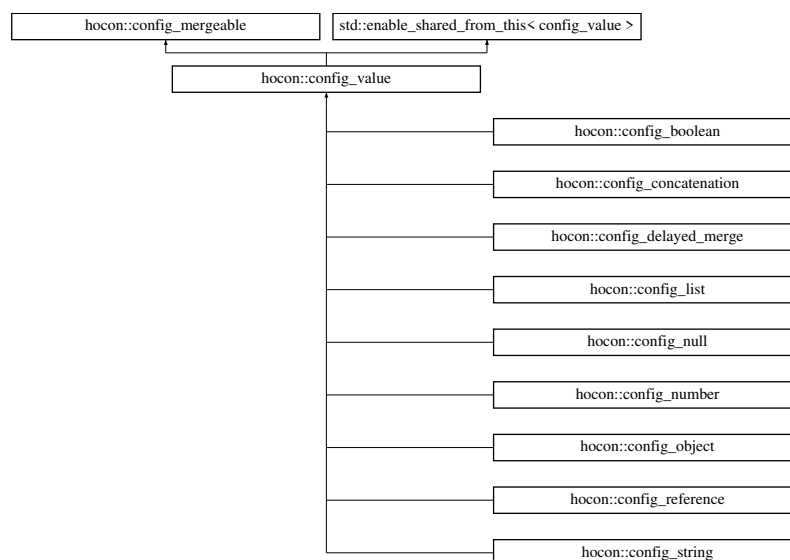

### Classes

- class [modifier](#)
- class [no\\_exceptions\\_modifier](#)

### Public Types

- enum class [type](#) {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

## Public Member Functions

- virtual `shared_origin` const & `origin` () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- virtual `type` `value_type` () const =0  
*The type of the value; matches the JSON type schema.*
- char const \* `value_type_name` () const  
*The printable name of the value type.*
- virtual unwrapped\_value `unwrapped` () const =0
- virtual std::string `render` () const  
*Renders the config value as a HOCON string.*
- virtual std::string `render` (`config_render_options` options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config `at_key` (std::string const &key) const  
*Places the value inside a `config` at the given key.*
- shared\_config `at_path` (std::string const &path\_expression) const  
*Places the value inside a `config` at the given path.*
- virtual shared\_value `with_origin` (shared\_origin `origin`) const  
*Returns a `config_value` based on this one, but with the given origin.*
- virtual shared\_value `relativized` (std::string prefix) const  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- virtual resolve\_status `get_resolve_status` () const
- std::shared\_ptr< const `config_mergeable` > `with_fallback` (std::shared\_ptr< const `config_mergeable` > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- virtual bool `operator==` (`config_value` const &other) const =0
- virtual std::string `transform_to_string` () const

## Static Public Member Functions

- static char const \* `type_name` (type t)

## Protected Member Functions

- `config_value` (shared\_origin `origin`)
- virtual void `render` (std::string &result, int indent, bool at\_root, std::string const &at\_key, `config_render_options` options) const
- virtual void `render` (std::string &result, int indent, bool at\_root, `config_render_options` options) const
- shared\_config `at_key` (shared\_origin `origin`, std::string const &key) const
- shared\_config `at_path` (shared\_origin `origin`, `path` raw\_path) const
- virtual shared\_value `new_copy` (shared\_origin `origin`) const =0
- virtual `resolve_result`< shared\_value > `resolve_substitutions` (`resolve_context` const &context, `resolve_source` const &source) const
- void `require_not_ignoring_fallbacks` () const
- virtual bool `ignores_fallbacks` () const
- virtual shared\_value `with_fallbacks_ignored` () const
- shared\_value `merged_with_the_unmergeable` (std::vector< shared\_value > stack, std::shared\_ptr< const `unmergeable` > fallback) const
- shared\_value `merged_with_the_unmergeable` (std::shared\_ptr< const `unmergeable` > fallback) const
- shared\_value `merged_with_object` (std::vector< shared\_value > stack, shared\_object fallback) const



- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin [origin](#), std::vector< shared\_value > stack) const
- shared\_value [to\\_fallback\\_value](#) () const override

*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool [equals](#) ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

## Friends

- class [token](#)
- class [value](#)
- class [default\\_transformer](#)
- class [config](#)
- class [config\\_object](#)
- class [simple\\_config\\_object](#)
- class [simple\\_config\\_list](#)
- class [config\\_concatenation](#)
- class [resolve\\_context](#)
- class [config\\_delayed\\_merge](#)
- class [config\\_delayed\\_merge\\_object](#)
- resolve\_status **resolve\_status\_from\_values** (std::vector< shared\_value > const &v)

### 7.44.1 Detailed Description

An immutable value, following the [JSON](#) type schema.

Because this object is immutable, it is safe to use from multiple threads and there's no need for "defensive copies."

*Do not implement interface `ConfigValue`; it should only be implemented by the config library. Arbitrary implementations will not work because the library internals assume a specific concrete implementation. Also, this interface is likely to grow new methods over time, so third-party implementations will break.*

Definition at line 39 of file [config\\_value.hpp](#).

### 7.44.2 Member Enumeration Documentation

### 7.44.2.1 type

```
enum class hocon::config_value::type [strong]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

## 7.44.3 Member Function Documentation

### 7.44.3.1 at\_key()

```
shared_config hocon::config_value::at_key (  
    std::string const & key ) const
```

Places the value inside a [config](#) at the given key.

See also [config\\_value#at\\_path\(string\)](#).

#### Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

#### Returns

a [config](#) instance containing this value at the given key.

### 7.44.3.2 at\_path()

```
shared_config hocon::config_value::at_path (  
    std::string const & path_expression ) const
```

Places the value inside a [config](#) at the given path.

See also [config\\_value#at\\_key\(String\)](#).

#### Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

#### Returns

a [config](#) instance containing this value at the given path.

### 7.44.3.3 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected]
```

Definition at line 250 of file [config\\_value.hpp](#).

### 7.44.3.4 origin()

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

#### Returns

where the value came from

### 7.44.3.5 relativized()

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

#### Parameters

<i>prefix</i>	
---------------	--

#### Returns

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.44.3.6 render() [1/2]**

```
virtual std::string hocon::config_value::render ( ) const [virtual]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.44.3.7 render() [2/2]**

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.44.3.8 to\_fallback\_value()**

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.44.3.9 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.44.3.10 value\_type()

```
virtual type hocon::config_value::value_type ( ) const [pure virtual]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implemented in [hocon::config\\_object](#), [hocon::config\\_boolean](#), [hocon::config\\_concatenation](#), [hocon::config\\_delayed\\_merge](#), [hocon::config\\_null](#), [hocon::config\\_number](#), [hocon::config\\_reference](#), [hocon::config\\_string](#), and [hocon::simple\\_config\\_list](#).

#### 7.44.3.11 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline]
```

The printable name of the value type.

##### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

### 7.44.3.12 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

#### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

#### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

### 7.44.3.13 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns

the new [config\\_value](#) with the given origin

## 7.44.4 Friends And Related Function Documentation

### 7.44.4.1 config

```
friend class config [friend]
```

Definition at line 43 of file [config\\_value.hpp](#).

### 7.44.4.2 config\_concatenation

```
friend class config_concatenation [friend]
```

Definition at line 47 of file [config\\_value.hpp](#).

### 7.44.4.3 config\_delayed\_merge

```
friend class config_delayed_merge [friend]
```

Definition at line 49 of file [config\\_value.hpp](#).

### 7.44.4.4 config\_delayed\_merge\_object

```
friend class config_delayed_merge_object [friend]
```

Definition at line 50 of file [config\\_value.hpp](#).

#### 7.44.4.5 `config_object`

```
friend class config_object [friend]
```

Definition at line 44 of file `config_value.hpp`.

#### 7.44.4.6 `default_transformer`

```
friend class default_transformer [friend]
```

Definition at line 42 of file `config_value.hpp`.

#### 7.44.4.7 `resolve_context`

```
friend class resolve_context [friend]
```

Definition at line 48 of file `config_value.hpp`.

#### 7.44.4.8 `simple_config_list`

```
friend class simple_config_list [friend]
```

Definition at line 46 of file `config_value.hpp`.

#### 7.44.4.9 `simple_config_object`

```
friend class simple_config_object [friend]
```

Definition at line 45 of file `config_value.hpp`.

#### 7.44.4.10 `token`

```
friend class token [friend]
```

Definition at line 40 of file `config_value.hpp`.



#### 7.44.4.11 value

```
friend class value [friend]
```

Definition at line 41 of file [config\\_value.hpp](#).

The documentation for this class was generated from the following file:

- [hocon/config\\_value.hpp](#)

## 7.45 hocon::config\_value\_factory Class Reference

### Static Public Member Functions

- static shared\_value [from\\_any\\_ref](#) (unwrapped\_value [value](#), std::string origin\_description="")  
*Creates a ConfigValue from a plain value, which may be a bool, long, string, unordered\_map, vector or nullptr.*

#### 7.45.1 Detailed Description

Definition at line 8 of file [config\\_value\\_factory.hpp](#).

#### 7.45.2 Member Function Documentation

##### 7.45.2.1 from\_any\_ref()

```
static shared_value hocon::config_value_factory::from_any_ref (  
    unwrapped_value value,  
    std::string origin_description = "" ) [static]
```

Creates a ConfigValue from a plain value, which may be a bool, long, string, unordered\_map, vector or nullptr.

An unordered\_map must be a unordered\_map from string to more values that can be supplied to [from\\_any\\_ref\(\)](#). An unordered\_map will become a ConfigObject and a vector will become a ConfigList.

In a unordered\_map passed to [from\\_any\\_ref\(\)](#), the map's keys are plain keys, not path expressions. So if your unordered\_map has a key "foo.bar" then you will get one object with a key called "foo.bar", rather than an object with a key "foo" containing another object with a key "bar".

The origin\_description will be used to set the origin() field on the ConfigValue. It should normally be the name of the file the values came from, or something short describing the value such as "default settings". The origin\_description is prefixed to error messages so users can tell where problematic values are coming from.

Supplying the result of ConfigValue.unwrapped() to this function is guaranteed to work and should give you back a ConfigValue that matches the one you unwrapped. The re-wrapped ConfigValue will lose some information that was present in the original such as its origin, but it will have matching values.

## Parameters

<i>unwrapped_value</i>	object object to convert to ConfigValue
<i>string</i>	origin_description name of origin file or brief description of what the value is

## Returns

shared\_value a new value

The documentation for this class was generated from the following file:


- `hocon/config_value_factory.hpp`

## 7.46 hocon::container Class Reference

An AbstractConfigValue which contains other values.

```
#include <container.hpp>
```

Inheritance diagram for hocon::container:

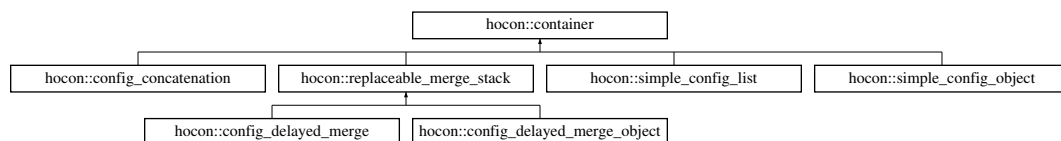

### Public Member Functions

- virtual shared\_value [replace\\_child](#) (shared\_value const &child, shared\_value replacement) const =0  
*Replace a child of this value.*
- virtual bool [has\\_descendant](#) (shared\_value const &descendant) const =0  
*Super-expensive full traversal to see if descendant is anywhere underneath this container.*

#### 7.46.1 Detailed Description

An AbstractConfigValue which contains other values.

Java has no way to express "this has to be an AbstractConfigValue also" other than making AbstractConfigValue an interface which would be aggravating. But we can say we are a ConfigValue.

Definition at line 12 of file [container.hpp](#).

#### 7.46.2 Member Function Documentation

### 7.46.2.1 has\_descendant()

```
virtual bool hocon::container::has_descendant (
    shared_value const & descendant ) const [pure virtual]
```

Super-expensive full traversal to see if descendant is anywhere underneath this container.

Implemented in [hocon::config\\_concatenation](#), [hocon::config\\_delayed\\_merge](#), [hocon::config\\_delayed\\_merge\\_object](#), [hocon::simple\\_config\\_list](#), and [hocon::simple\\_config\\_object](#).

### 7.46.2.2 replace\_child()

```
virtual shared_value hocon::container::replace_child (
    shared_value const & child,
    shared_value replacement ) const [pure virtual]
```

Replace a child of this value.

CAUTION if replacement is null, delete the child, which may also delete the parent, or make the parent into a non-container.

Implemented in [hocon::config\\_concatenation](#), [hocon::config\\_delayed\\_merge](#), [hocon::config\\_delayed\\_merge\\_object](#), [hocon::simple\\_config\\_list](#), and [hocon::simple\\_config\\_object](#).

The documentation for this class was generated from the following file:

- internal/container.hpp

## 7.47 hocon::default\_transformer Class Reference

### Static Public Member Functions

- static shared\_value **transform** (shared\_value [value](#), [config\\_value::type](#) requested)

### 7.47.1 Detailed Description


Definition at line 7 of file [default\\_transformer.hpp](#).

The documentation for this class was generated from the following file:

- internal/default\_transformer.hpp

## 7.48 hocon::double\_slash\_comment Class Reference

Inheritance diagram for hocon::double\_slash\_comment:

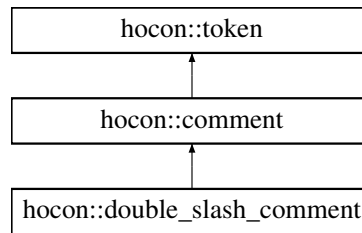

### Public Member Functions

- **double\_slash\_comment** (shared\_origin origin, std::string text)
- std::string **token\_text** () const override
- std::string **text** () const
- std::string **to\_string** () const override
- bool **operator==** (const **token** &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const

### 7.48.1 Detailed Description

Definition at line 82 of file [tokens.hpp](#).

### 7.48.2 Member Function Documentation

#### 7.48.2.1 operator==( )

```
bool hocon::comment::operator== (
    const token & other ) const [override], [virtual], [inherited]
```

Reimplemented from [hocon::token](#).

#### 7.48.2.2 to\_string( )

```
std::string hocon::comment::to_string ( ) const [override], [virtual], [inherited]
```

Reimplemented from [hocon::token](#).

### 7.48.2.3 token\_text()

```
std::string hocon::double_slash_comment::token_text ( ) const [override], [virtual]
```


Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:

- internal/tokens.hpp

## 7.49 hocon::file\_name\_source Class Reference

Inheritance diagram for hocon::file\_name\_source:



### Public Member Functions

- **file\_name\_source** (shared\_include\_context context)
- shared\_parseable [name\\_to\\_parseable](#) (std::string name, [config\\_parse\\_options](#) parse\_options) const override
- void [set\\_context](#) (shared\_include\_context context)
- shared\_include\_context [get\\_context](#) () const
- bool [context\\_initialized](#) () const

### 7.49.1 Detailed Description

Definition at line 98 of file [simple\\_includer.hpp](#).

### 7.49.2 Member Function Documentation

#### 7.49.2.1 context\_initialized()

```
bool hocon::name_source::context_initialized ( ) const [inline], [inherited]
```

Definition at line 81 of file [simple\\_includer.hpp](#).

### 7.49.2.2 `get_context()`

```
shared_include_context hocon::name_source::get_context ( ) const [inline], [inherited]
```

Definition at line 77 of file [simple\\_includer.hpp](#).

### 7.49.2.3 `name_to_parseable()`

```
shared_parseable hocon::file_name_source::name_to_parseable (
    std::string name,
    config_parse_options parse_options ) const [override], [virtual]
```

Implements [hocon::name\\_source](#).

### 7.49.2.4 `set_context()`

```
void hocon::name_source::set_context (
    shared_include_context context ) [inline], [inherited]
```


Definition at line 70 of file [simple\\_includer.hpp](#).

The documentation for this class was generated from the following file:

- [internal/simple\\_includer.hpp](#)

## 7.50 `hocon::full_includer` Class Reference

Inheritance diagram for `hocon::full_includer`:



### Public Member Functions

- virtual `shared_includer` [with\\_fallback](#) (`shared_includer` fallback) const =0  
*Returns a new includer that falls back to the given includer.*
- virtual `shared_object` [include](#) (`shared_include_context` context, `std::string` what) const =0  
*Parses another item to be included.*
- virtual `shared_object` [include\\_file](#) (`shared_include_context` context, `std::string` what) const =0  
*Parses another item to be included.*

### 7.50.1 Detailed Description

Definition at line 9 of file [full\\_includer.hpp](#).

### 7.50.2 Member Function Documentation

#### 7.50.2.1 include()

```
virtual shared_object hocon::config_includer::include (
    shared_include_context context,
    std::string what ) const [pure virtual], [inherited]
```

Parses another item to be included.

The returned object typically would not have substitutions resolved. You can throw a [config\\_exception](#) here to abort parsing, or return an empty object, but may not return null.

This method is used for a "heuristic" include statement that does not specify file, or URL resource. If the include statement does specify, then the same class implementing [config\\_includer](#) must also implement [config\\_includer\\_file](#) or [config\\_includer\\_URL](#) as needed, or a default includer will be used.

##### Parameters

<i>context</i>	some info about the include context
<i>what</i>	the include statement's argument

##### Returns

a non-null [config\\_object](#)

Implemented in [hocon::simple\\_includer](#).

#### 7.50.2.2 include\_file()

```
virtual shared_object hocon::config_includer_file::include_file (
    shared_include_context context,
    std::string what ) const [pure virtual], [inherited]
```

Parses another item to be included.

The returned object typically would not have substitutions resolved. You can throw a [config\\_exception](#) here to abort parsing, or return an empty object, but may not return null.

##### Parameters

<i>context</i>	some info about the include context
<i>what</i>	the include statement's argument (a file path)

**Returns**

a non-null [config\\_object](#)

Implemented in [hocon::simple\\_includer](#).

**7.50.2.3 with\_fallback()**

```
virtual shared_includer hocon::config_includer::with_fallback (
    shared_includer fallback ) const [pure virtual], [inherited]
```

Returns a new includer that falls back to the given includer.

This is how you can obtain the default includer; it will be provided as a fallback. It's up to your includer to chain to it if you want to. You might want to merge any files found by the fallback includer with any objects you load yourself.

It's important to handle the case where you already have the fallback with a "return this", i.e. this method should not create a new object if the fallback is the same one you already have. The same fallback may be added repeatedly.

**Parameters**

<i>fallback</i>	the previous includer for chaining
-----------------	------------------------------------

**Returns**

a new includer


Implemented in [hocon::simple\\_includer](#).

The documentation for this class was generated from the following file:

- `internal/full_includer.hpp`

**7.51 FwdListIter< T > Class Template Reference**

Inheritance diagram for FwdListIter< T >:

**Public Member Functions**

- [FwdListIter](#) ([List](#)< T > const &lst)
- T [operator\\*](#) () const
- [FwdListIter](#) & [operator++](#) ()
- bool [operator==](#) (FwdListIter< T > const &other)
- bool [operator!=](#) (FwdListIter< T > const &other)



### 7.51.1 Detailed Description

```
template<class T>
class FwdListIter< T >
```

Definition at line 117 of file [functional\\_list.hpp](#).

### 7.51.2 Constructor & Destructor Documentation

#### 7.51.2.1 FwdListIter() [1/2]

```
template<class T >
FwdListIter< T >::FwdListIter ( ) [inline]
```

Definition at line 120 of file [functional\\_list.hpp](#).

#### 7.51.2.2 FwdListIter() [2/2]

```
template<class T >
FwdListIter< T >::FwdListIter (
    List< T > const & lst ) [inline]
```

Definition at line 121 of file [functional\\_list.hpp](#).

### 7.51.3 Member Function Documentation

#### 7.51.3.1 operator"!="()

```
template<class T >
bool FwdListIter< T >::operator!= (
    FwdListIter< T > const & other ) [inline]
```

Definition at line 133 of file [functional\\_list.hpp](#).

#### 7.51.3.2 operator\*()

```
template<class T >
T FwdListIter< T >::operator* ( ) const [inline]
```

Definition at line 123 of file [functional\\_list.hpp](#).

### 7.51.3.3 operator++()

```
template<class T >
FwdListIter & FwdListIter< T >::operator++ ( ) [inline]
```

Definition at line 124 of file [functional\\_list.hpp](#).

### 7.51.3.4 operator==()

```
template<class T >
bool FwdListIter< T >::operator== (
    FwdListIter< T > const & other ) [inline]
```

Definition at line 129 of file [functional\\_list.hpp](#).

The documentation for this class was generated from the following file:


- [hocon/functional\\_list.hpp](#)

## 7.52 hocon::generic\_exception Struct Reference

Exception that doesn't fall into any other category.

```
#include <config_exception.hpp>
```

Inheritance diagram for `hocon::generic_exception`:



### Public Member Functions

- [generic\\_exception](#) (std::string const &message)

#### 7.52.1 Detailed Description

Exception that doesn't fall into any other category.

Definition at line 181 of file [config\\_exception.hpp](#).

## 7.52.2 Constructor & Destructor Documentation

### 7.52.2.1 generic\_exception()

```
hocon::generic_exception::generic_exception (
    std::string const & message ) [inline]
```


Definition at line 182 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)

## 7.53 hocon::hash\_comment Class Reference

Inheritance diagram for hocon::hash\_comment:



### Public Member Functions

- **hash\_comment** (shared\_origin origin, std::string text)
- std::string [token\\_text](#) () const override
- std::string **text** () const
- std::string [to\\_string](#) () const override
- bool [operator==](#) (const [token](#) &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const

### 7.53.1 Detailed Description

Definition at line 89 of file [tokens.hpp](#).

### 7.53.2 Member Function Documentation

### 7.53.2.1 operator==( )

```
bool hocon::comment::operator== (
    const token & other ) const [override], [virtual], [inherited]
```

Reimplemented from [hocon::token](#).

### 7.53.2.2 to\_string( )

```
std::string hocon::comment::to_string ( ) const [override], [virtual], [inherited]
```

Reimplemented from [hocon::token](#).

### 7.53.2.3 token\_text( )

```
std::string hocon::hash_comment::token_text ( ) const [override], [virtual]
```


Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:

- internal/tokens.hpp

## 7.54 hocon::ignored\_whitespace Class Reference

Inheritance diagram for hocon::ignored\_whitespace:



### Public Member Functions

- **ignored\_whitespace** (shared\_origin origin, std::string whitespace)
- std::string **to\_string** ( ) const override
- bool **operator==** (const token &other) const override
- virtual token\_type **get\_token\_type** ( ) const
- virtual std::string **token\_text** ( ) const
- virtual shared\_origin const & **origin** ( ) const
- int **line\_number** ( ) const

### 7.54.1 Detailed Description

Definition at line 42 of file [tokens.hpp](#).

### 7.54.2 Member Function Documentation

#### 7.54.2.1 operator==( )

```
bool hocon::ignored_whitespace::operator== (
    const token & other ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

#### 7.54.2.2 to\_string( )

```
std::string hocon::ignored_whitespace::to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:


- internal/tokens.hpp

## 7.55 hocon::io\_exception Struct Reference

Exception indicating that there was an IO error.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::io\_exception:



## Public Member Functions

- [io\\_exception](#) ([config\\_origin](#) const &origin, std::string const &message)

### 7.55.1 Detailed Description

Exception indicating that there was an IO error.

Definition at line 93 of file [config\\_exception.hpp](#).

### 7.55.2 Constructor & Destructor Documentation

#### 7.55.2.1 io\_exception()

```
hocon::io_exception::io_exception (
    config\_origin const & origin,
    std::string const & message ) [inline]
```


Definition at line 94 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)

## 7.56 hocon::iterator Class Reference

Inheritance diagram for hocon::iterator:



## Public Member Functions

- virtual bool **has\_next** ()=0
- virtual shared\_token **next** ()=0

### 7.56.1 Detailed Description


Definition at line 24 of file [tokenizer.hpp](#).

The documentation for this class was generated from the following file:

- [internal/tokenizer.hpp](#)

## 7.57 hocon::iterator\_wrapper< iter > Class Template Reference

Inheritance diagram for hocon::iterator\_wrapper< iter >:



### Public Member Functions

- [iterator\\_wrapper](#) (iter begin, iter end)
- bool [has\\_next](#) () override
- shared\_token [next](#) () override

#### 7.57.1 Detailed Description

```
template<typename iter>  
class hocon::iterator_wrapper< iter >
```

Definition at line 31 of file [tokenizer.hpp](#).

#### 7.57.2 Constructor & Destructor Documentation

##### 7.57.2.1 iterator\_wrapper()

```
template<typename iter >  
hocon::iterator_wrapper< iter >::iterator_wrapper (  
    iter begin,  
    iter end ) [inline]
```

Definition at line 33 of file [tokenizer.hpp](#).

#### 7.57.3 Member Function Documentation

##### 7.57.3.1 has\_next()

```
template<typename iter >  
bool hocon::iterator_wrapper< iter >::has_next ( ) [inline], [override], [virtual]
```

Implements [hocon::iterator](#).

Definition at line 36 of file [tokenizer.hpp](#).

### 7.57.3.2 next()

```
template<typename iter >
shared_token hocon::iterator_wrapper< iter >::next ( ) [inline], [override], [virtual]
```

Implements [hocon::iterator](#).


Definition at line 40 of file [tokenizer.hpp](#).

The documentation for this class was generated from the following file:

- [internal/tokenizer.hpp](#)

## 7.58 hocon::line Class Reference

Inheritance diagram for [hocon::line](#):



### Public Member Functions

- **line** (shared\_origin origin)
- std::string **to\_string** () const override
- bool **operator==** ([token](#) const &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual std::string **token\_text** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const

### 7.58.1 Detailed Description

Definition at line 24 of file [tokens.hpp](#).

### 7.58.2 Member Function Documentation

#### 7.58.2.1 operator==()

```
bool hocon::line::operator== (
    token const & other ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).



### 7.58.2.2 to\_string()

```
std::string hocon::line::to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:

- [internal/tokens.hpp](#)

## 7.59 List< T > Class Template Reference

### Public Member Functions

- [List](#) (T v, [List](#) const &tail)
- [List](#) (T v)
- bool [isEmpty](#) () const
- T [front](#) () const
- [List](#) [popped\\_front](#) () const
- [List](#) [pushed\\_front](#) (T v) const
- [List](#) [take](#) (int n)
- [List](#) [insertedAt](#) (int i, T v) const
- [List](#) [removed](#) (T v) const
- [List](#) [removed1](#) (T v) const
- bool [member](#) (T v) const
- template<class F >  
void [forEach](#) (F f) const
- int [headCount](#) () const

### Friends

- class [FwdListIter](#)< T >

### 7.59.1 Detailed Description

```
template<class T>
class List< T >
```

Definition at line 13 of file [functional\\_list.hpp](#).

### 7.59.2 Constructor & Destructor Documentation

### 7.59.2.1 List() [1/3]

```
template<class T >
List< T >::List ( ) [inline]
```

Definition at line 31 of file [functional\\_list.hpp](#).

### 7.59.2.2 List() [2/3]

```
template<class T >
List< T >::List (
    T v,
    List< T > const & tail ) [inline]
```

Definition at line 33 of file [functional\\_list.hpp](#).

### 7.59.2.3 List() [3/3]

```
template<class T >
List< T >::List (
    T v ) [inline], [explicit]
```

Definition at line 36 of file [functional\\_list.hpp](#).

## 7.59.3 Member Function Documentation

### 7.59.3.1 forEach()

```
template<class T >
template<class F >
void List< T >::forEach (
    F f ) const [inline]
```

Definition at line 89 of file [functional\\_list.hpp](#).

### 7.59.3.2 front()

```
template<class T >
T List< T >::front ( ) const [inline]
```

Definition at line 39 of file [functional\\_list.hpp](#).

### 7.59.3.3 headCount()

```
template<class T >
int List< T >::headCount ( ) const [inline]
```

Definition at line 101 of file [functional\\_list.hpp](#).

### 7.59.3.4 insertedAt()

```
template<class T >
List List< T >::insertedAt (
    int i,
    T v ) const [inline]
```

Definition at line 59 of file [functional\\_list.hpp](#).

### 7.59.3.5 isEmpty()

```
template<class T >
bool List< T >::isEmpty ( ) const [inline]
```

Definition at line 38 of file [functional\\_list.hpp](#).

### 7.59.3.6 member()

```
template<class T >
bool List< T >::member (
    T v ) const [inline]
```

Definition at line 82 of file [functional\\_list.hpp](#).

### 7.59.3.7 popped\_front()

```
template<class T >
List List< T >::popped_front ( ) const [inline]
```

Definition at line 44 of file [functional\\_list.hpp](#).

### 7.59.3.8 pushed\_front()

```
template<class T >
List List< T >::pushed_front (
    T v ) const [inline]
```

Definition at line 50 of file [functional\\_list.hpp](#).

### 7.59.3.9 removed()

```
template<class T >
List List< T >::removed (
    T v ) const [inline]
```

Definition at line 68 of file [functional\\_list.hpp](#).

### 7.59.3.10 removed1()

```
template<class T >
List List< T >::removed1 (
    T v ) const [inline]
```

Definition at line 75 of file [functional\\_list.hpp](#).

### 7.59.3.11 take()

```
template<class T >
List List< T >::take (
    int n ) [inline]
```

Definition at line 54 of file [functional\\_list.hpp](#).

## 7.59.4 Friends And Related Function Documentation

### 7.59.4.1 FwdListIter< T >

```
template<class T >
friend class FwdListIter< T > [friend]
```

Definition at line 89 of file [functional\\_list.hpp](#).

The documentation for this class was generated from the following file:


- [hocon/functional\\_list.hpp](#)

## 7.60 hocon::missing\_exception Struct Reference

Exception indicates that the setting was never set to anything, not even null.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::missing\_exception:

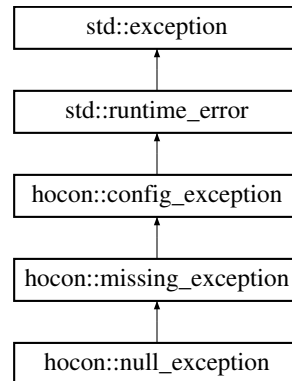

### Public Member Functions

- [missing\\_exception](#) (std::string const &path)
- [config\\_exception](#) (config\_origin const &origin, std::string const &message)
- [config\\_exception](#) (std::string const &message)
- [config\\_exception](#) (std::string const &message, std::exception const &e)

#### 7.60.1 Detailed Description

Exception indicates that the setting was never set to anything, not even null.

Definition at line 38 of file [config\\_exception.hpp](#).

#### 7.60.2 Constructor & Destructor Documentation

##### 7.60.2.1 missing\_exception()

```
hocon::missing_exception::missing_exception (
    std::string const & path ) [inline]
```

Definition at line 39 of file [config\\_exception.hpp](#).

#### 7.60.3 Member Function Documentation

### 7.60.3.1 `config_exception()` [1/3]

```
hocon::config_exception::config_exception (
    config_origin const & origin,
    std::string const & message ) [inline]
```

Definition at line 15 of file [config\\_exception.hpp](#).

### 7.60.3.2 `config_exception()` [2/3]

```
hocon::config_exception::config_exception (
    std::string const & message ) [inline]
```

Definition at line 17 of file [config\\_exception.hpp](#).

### 7.60.3.3 `config_exception()` [3/3]

```
hocon::config_exception::config_exception (
    std::string const & message,
    std::exception const & e ) [inline]
```


Definition at line 19 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)

## 7.61 `hocon::config_value::modifier` Class Reference

Inheritance diagram for `hocon::config_value::modifier`:



### Public Member Functions

- virtual `shared_value` **modify\_child\_may\_throw** (`std::string const &key_or_null`, `shared_value v`)=0

### 7.61.1 Detailed Description


Definition at line 212 of file [config\\_value.hpp](#).

The documentation for this class was generated from the following file:

- [hocon/config\\_value.hpp](#)

## 7.62 hocon::name\_source Class Reference

Inheritance diagram for hocon::name\_source:



### Public Member Functions

- [name\\_source](#) (shared\_include\_context context)
- virtual shared\_parseable **name\_to\_parseable** (std::string name, [config\\_parse\\_options](#) parse\_options) const =0
- void [set\\_context](#) (shared\_include\_context context)
- shared\_include\_context [get\\_context](#) () const
- bool [context\\_initialized](#) () const

### 7.62.1 Detailed Description

Definition at line 57 of file [simple\\_includer.hpp](#).

### 7.62.2 Constructor & Destructor Documentation

#### 7.62.2.1 name\_source() [1/2]

```

hocon::name_source::name_source (
    shared_include_context context ) [inline]
  
```

Definition at line 59 of file [simple\\_includer.hpp](#).

### 7.62.2.2 name\_source() [2/2]

```
hocon::name_source::name_source ( ) [inline]
```

Definition at line 66 of file [simple\\_includer.hpp](#).

## 7.62.3 Member Function Documentation

### 7.62.3.1 context\_initialized()

```
bool hocon::name_source::context_initialized ( ) const [inline]
```

Definition at line 81 of file [simple\\_includer.hpp](#).

### 7.62.3.2 get\_context()

```
shared_include_context hocon::name_source::get_context ( ) const [inline]
```

Definition at line 77 of file [simple\\_includer.hpp](#).

### 7.62.3.3 set\_context()

```
void hocon::name_source::set_context (
    shared_include_context context ) [inline]
```


Definition at line 70 of file [simple\\_includer.hpp](#).

The documentation for this class was generated from the following file:

- [internal/simple\\_includer.hpp](#)

## 7.63 hocon::config\_value::no\_exceptions\_modifier Class Reference

Inheritance diagram for hocon::config\_value::no\_exceptions\_modifier:





## Public Member Functions

- **no\_exceptions\_modifier** (std::string prefix)
- shared\_value **modify\_child\_may\_throw** (std::string const &key\_or\_null, shared\_value v) override
- shared\_value **modify\_child** (std::string const &key, shared\_value v) const

### 7.63.1 Detailed Description

Definition at line 217 of file [config\\_value.hpp](#).

### 7.63.2 Member Function Documentation

#### 7.63.2.1 modify\_child\_may\_throw()

```
shared_value hocon::config_value::no_exceptions_modifier::modify_child_may_throw (
    std::string const & key_or_null,
    shared_value v ) [override], [virtual]
```


Implements [hocon::config\\_value::modifier](#).

The documentation for this class was generated from the following file:

- hocon/config\_value.hpp

## 7.64 hocon::not\_possible\_to\_resolve\_exception Struct Reference

Inheritance diagram for hocon::not\_possible\_to\_resolve\_exception:

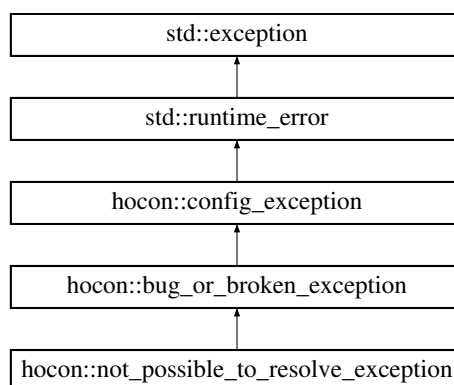

## Public Member Functions

- **not\_possible\_to\_resolve\_exception** (std::string const &message)

### 7.64.1 Detailed Description

Definition at line 127 of file [config\\_exception.hpp](#).

### 7.64.2 Constructor & Destructor Documentation

#### 7.64.2.1 not\_possible\_to\_resolve\_exception()

```
hocon::not_possible_to_resolve_exception::not_possible_to_resolve_exception (
    std::string const & message ) [inline]
```

Definition at line 128 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:


- [hocon/config\\_exception.hpp](#)

## 7.65 hocon::not\_resolved\_exception Struct Reference

Exception indicating that you tried to use a function that requires substitutions to be resolved, but substitutions have not been resolved (that is, [config#resolve](#) was not called).

```
#include <config_exception.hpp>
```

Inheritance diagram for `hocon::not_resolved_exception`:

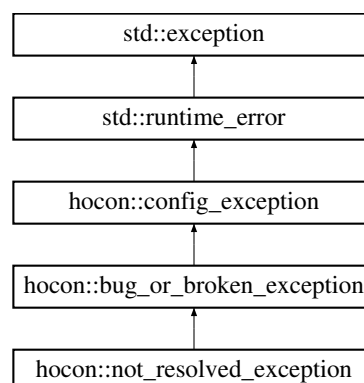

### Public Member Functions

- [not\\_resolved\\_exception](#) (std::string const &message)

### 7.65.1 Detailed Description

Exception indicating that you tried to use a function that requires substitutions to be resolved, but substitutions have not been resolved (that is, `config#resolve` was not called).

This is always a bug in either application code or the library; it's wrong to write a handler for this exception because you should be able to fix the code to avoid it by adding calls to `config#resolve`.

Definition at line 123 of file `config_exception.hpp`.

### 7.65.2 Constructor & Destructor Documentation

#### 7.65.2.1 not\_resolved\_exception()

```
hocon::not_resolved_exception::not_resolved_exception (
    std::string const & message ) [inline]
```

Definition at line 124 of file `config_exception.hpp`.

The documentation for this struct was generated from the following file:


- `hocon/config_exception.hpp`

## 7.66 hocon::null\_exception Struct Reference

Exception indicates that the setting was treated as missing because it was set to null.

```
#include <config_exception.hpp>
```

Inheritance diagram for `hocon::null_exception`:

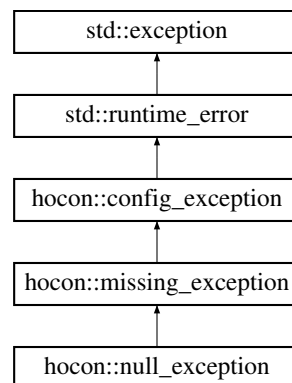

## Public Member Functions

- [null\\_exception](#) ([config\\_origin](#) const &origin, std::string const &[path](#), std::string const &expected="")
- [config\\_exception](#) ([config\\_origin](#) const &origin, std::string const &message)
- [config\\_exception](#) (std::string const &message)
- [config\\_exception](#) (std::string const &message, std::exception const &e)

### 7.66.1 Detailed Description

Exception indicates that the setting was treated as missing because it was set to null.

Definition at line 48 of file [config\\_exception.hpp](#).

### 7.66.2 Constructor & Destructor Documentation

#### 7.66.2.1 [null\\_exception\(\)](#)

```
hocon::null_exception::null_exception (
    config\_origin const & origin,
    std::string const & path,
    std::string const & expected = "" ) [inline]
```

Definition at line 49 of file [config\\_exception.hpp](#).

### 7.66.3 Member Function Documentation

#### 7.66.3.1 [config\\_exception\(\)](#) [1/3]

```
hocon::config_exception::config_exception (
    config\_origin const & origin,
    std::string const & message ) [inline], [inherited]
```

Definition at line 15 of file [config\\_exception.hpp](#).

#### 7.66.3.2 [config\\_exception\(\)](#) [2/3]

```
hocon::config_exception::config_exception (
    std::string const & message ) [inline], [inherited]
```

Definition at line 17 of file [config\\_exception.hpp](#).

### 7.66.3.3 config\_exception() [3/3]

```
hocon::config_exception::config_exception (
    std::string const & message,
    std::exception const & e ) [inline], [inherited]
```


Definition at line 19 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)

## 7.67 OutListIter< T > Class Template Reference

Inheritance diagram for OutListIter< T >:



### Public Member Functions

- [T & operator\\*](#) ()
- [OutListIter & operator++](#) ()
- [List< T > getList](#) () const

### 7.67.1 Detailed Description

```
template<class T>
class OutListIter< T >
```

Definition at line 142 of file [functional\\_list.hpp](#).

### 7.67.2 Constructor & Destructor Documentation

#### 7.67.2.1 OutListIter()

```
template<class T >
OutListIter< T >::OutListIter ( ) [inline]
```

Definition at line 145 of file [functional\\_list.hpp](#).

### 7.67.3 Member Function Documentation

#### 7.67.3.1 `getList()`

```
template<class T >
List< T > OutListIter< T >::getList ( ) const [inline]
```

Definition at line 152 of file [functional\\_list.hpp](#).

#### 7.67.3.2 `operator*()`

```
template<class T >
T & OutListIter< T >::operator* ( ) [inline]
```

Definition at line 146 of file [functional\\_list.hpp](#).

#### 7.67.3.3 `operator++()`

```
template<class T >
OutListIter & OutListIter< T >::operator++ ( ) [inline]
```

Definition at line 147 of file [functional\\_list.hpp](#).

The documentation for this class was generated from the following file:

- [hocon/functional\\_list.hpp](#)

## 7.68 `hocon::config_document_parser::parse_context` Class Reference

### Public Member Functions

- **`parse_context`** (`config_syntax` flavor, `shared_origin` origin, [token\\_iterator](#) tokens)
- `std::shared_ptr< config\_node\_root >` **`parse`** ()
- `shared_node_value` [parse\\_single\\_value](#) ()

*Parse a given input stream into a single value node.*

#### 7.68.1 Detailed Description

Definition at line 22 of file [config\\_document\\_parser.hpp](#).

## 7.68.2 Member Function Documentation

### 7.68.2.1 parse\_single\_value()

```
shared_node_value hocon::config_document_parser::parse_context::parse_single_value ( )
```

Parse a given input stream into a single value node.

Used when doing a replace inside a ConfigDocument.

The documentation for this class was generated from the following file:

- `internal/config_document_parser.hpp`

## 7.69 hocon::config\_parser::parse\_context Class Reference

### Public Member Functions

- **parse\_context** (config\_syntax flavor, shared\_origin origin, std::shared\_ptr< const [config\\_node\\_root](#) > document, std::shared\_ptr< const [full\\_includer](#) > includer, shared\_include\_context include\_context)
- shared\_value **parse** ()

### Public Attributes

- int [array\\_count](#)

### 7.69.1 Detailed Description

Definition at line 27 of file [config\\_parser.hpp](#).

## 7.69.2 Member Data Documentation

### 7.69.2.1 array\_count

```
int hocon::config_parser::parse_context::array_count
```

Definition at line 42 of file [config\\_parser.hpp](#).

The documentation for this class was generated from the following file:


- `internal/config_parser.hpp`

## 7.70 hocon::parse\_exception Struct Reference

Exception indicating that there was a parse error.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::parse\_exception:

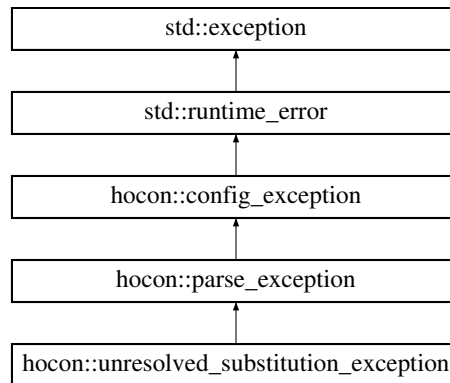

### Public Member Functions

- [parse\\_exception](#) ([config\\_origin](#) const &origin, std::string const &message)

#### 7.70.1 Detailed Description

Exception indicating that there was a parse error.

Definition at line 101 of file [config\\_exception.hpp](#).

#### 7.70.2 Constructor & Destructor Documentation

##### 7.70.2.1 parse\_exception()

```
hocon::parse_exception::parse_exception (  
    config\_origin const & origin,  
    std::string const & message ) [inline]
```

Definition at line 102 of file [config\\_exception.hpp](#).


The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)



## 7.71 hocon::parseable Class Reference

Inheritance diagram for hocon::parseable:

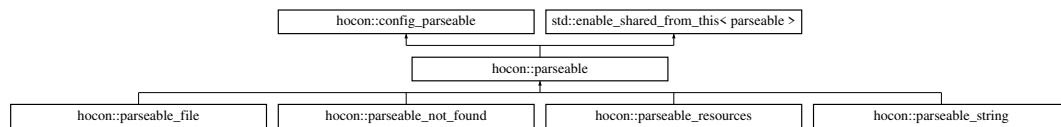

### Public Member Functions

- void **post\_construct** ([config\\_parse\\_options](#) const &base\_options)
- std::shared\_ptr< [config\\_document](#) > **parse\_config\_document** ()
- shared\_object **parse** ([config\\_parse\\_options](#) const &[options](#)) const override  
*Parse whatever it is.*
- shared\_object **parse** () const
- shared\_value **parse\_value** () const
- [config\\_parse\\_options](#) const & **options** () const override  
*Get the initial options, which can be modified then passed to [parse\(\)](#).*
- std::shared\_ptr< const [config\\_origin](#) > **origin** () const override  
*Returns a [config\\_origin](#) describing the origin of the parseable item.*
- virtual std::unique\_ptr< std::istream > **reader** ([config\\_parse\\_options](#) const &[options](#)) const
- virtual std::unique\_ptr< std::istream > **reader** () const =0
- virtual shared\_origin **create\_origin** () const =0
- virtual config\_syntax **guess\_syntax** () const
- virtual config\_syntax **content\_type** () const
- virtual std::shared\_ptr< [config\\_parseable](#) > **relative\_to** (std::string file\_name) const
- std::string **to\_string** () const
- std::string **get\_cur\_dir** () const
- void **set\_cur\_dir** (std::string dir) const
- void **separate\_filepath** (const std::string &[path](#), std::string \*file\_dir, std::string \*file\_name) const
- **parseable** ([parseable](#) const &)=delete
- [parseable](#) & **operator=** ([parseable](#) const &)=delete

### Static Public Member Functions

- static std::shared\_ptr< [parseable](#) > **new\_file** (std::string input\_file\_path, [config\\_parse\\_options](#) options)
- static std::shared\_ptr< [parseable](#) > **new\_string** (std::string s, [config\\_parse\\_options](#) options)
- static std::shared\_ptr< [parseable](#) > **new\_not\_found** (std::string what\_not\_found, std::string message, [config\\_parse\\_options](#) options)
- static config\_syntax **syntax\_from\_extension** (std::string name)

#### 7.71.1 Detailed Description

Definition at line 13 of file [parseable.hpp](#).

#### 7.71.2 Member Function Documentation

### 7.71.2.1 options()

```
config_parse_options const & hocon::parseable::options ( ) const [override], [virtual]
```

Get the initial options, which can be modified then passed to [parse\(\)](#).

These options will have the right description, includer, and other parameters already set up.

#### Returns

the initial options

Implements [hocon::config\\_parseable](#).

### 7.71.2.2 origin()

```
std::shared_ptr< const config_origin > hocon::parseable::origin ( ) const [override], [virtual]
```

Returns a [config\\_origin](#) describing the origin of the parseable item.

Implements [hocon::config\\_parseable](#).

### 7.71.2.3 parse()

```
shared_object hocon::parseable::parse (
    config_parse_options const & options ) const [override], [virtual]
```

Parse whatever it is.

The options should come from [config\\_parseable#options\(\)](#) but you could tweak them if you like.

#### Parameters

<i>options</i>	parse options, should be based on the ones from <a href="#">config_parseable#options()</a>
----------------	--------------------------------------------------------------------------------------------

#### Returns

the parsed object


Implements [hocon::config\\_parseable](#).

The documentation for this class was generated from the following file:

- `internal/parseable.hpp`

## 7.72 hocon::parseable\_file Class Reference

Inheritance diagram for hocon::parseable\_file:

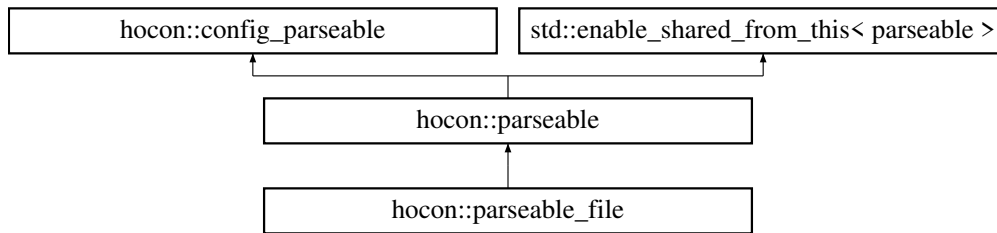

### Public Member Functions

- **parseable\_file** (std::string input\_file\_path, [config\\_parse\\_options options](#))
- std::unique\_ptr< std::istream > **reader** () const override
- shared\_origin **create\_origin** () const override
- config\_syntax **guess\_syntax** () const override
- void **post\_construct** ([config\\_parse\\_options](#) const &base\_options)
- std::shared\_ptr< [config\\_document](#) > **parse\_config\_document** ()
- shared\_object **parse** ([config\\_parse\\_options](#) const &[options](#)) const override
- *Parse whatever it is.*
- shared\_object **parse** () const
- shared\_value **parse\_value** () const
- [config\\_parse\\_options](#) const & [options](#) () const override
- *Get the initial options, which can be modified then passed to [parse\(\)](#).*
- std::shared\_ptr< const [config\\_origin](#) > **origin** () const override
- *Returns a [config\\_origin](#) describing the origin of the parseable item.*
- virtual std::unique\_ptr< std::istream > **reader** ([config\\_parse\\_options](#) const &[options](#)) const
- virtual config\_syntax **content\_type** () const
- virtual std::shared\_ptr< [config\\_parseable](#) > **relative\_to** (std::string file\_name) const
- std::string **to\_string** () const
- std::string **get\_cur\_dir** () const
- void **set\_cur\_dir** (std::string dir) const
- void **separate\_filepath** (const std::string &[path](#), std::string \*file\_dir, std::string \*file\_name) const

### Static Public Member Functions

- static std::shared\_ptr< [parseable](#) > **new\_file** (std::string input\_file\_path, [config\\_parse\\_options options](#))
- static std::shared\_ptr< [parseable](#) > **new\_string** (std::string s, [config\\_parse\\_options options](#))
- static std::shared\_ptr< [parseable](#) > **new\_not\_found** (std::string what\_not\_found, std::string message, [config\\_parse\\_options options](#))
- static config\_syntax **syntax\_from\_extension** (std::string name)

#### 7.72.1 Detailed Description

Definition at line 79 of file [parseable.hpp](#).

## 7.72.2 Member Function Documentation

### 7.72.2.1 create\_origin()

```
shared_origin hocon::parseable_file::create_origin ( ) const [override], [virtual]
```

Implements [hocon::parseable](#).

### 7.72.2.2 guess\_syntax()

```
config_syntax hocon::parseable_file::guess_syntax ( ) const [override], [virtual]
```

Reimplemented from [hocon::parseable](#).

### 7.72.2.3 options()

```
config_parse_options const & hocon::parseable::options ( ) const [override], [virtual], [inherited]
```

Get the initial options, which can be modified then passed to [parse\(\)](#).

These options will have the right description, includer, and other parameters already set up.

#### Returns

the initial options

Implements [hocon::config\\_parseable](#).

### 7.72.2.4 origin()

```
std::shared_ptr< const config_origin > hocon::parseable::origin ( ) const [override], [virtual], [inherited]
```

Returns a [config\\_origin](#) describing the origin of the parseable item.

Implements [hocon::config\\_parseable](#).

### 7.72.2.5 parse()

```
shared_object hocon::parseable::parse (
    config_parse_options const & options ) const [override], [virtual], [inherited]
```

Parse whatever it is.

The options should come from [config\\_parseable#options\(\)](#) but you could tweak them if you like.

## Parameters

<i>options</i>	parse options, should be based on the ones from <code>config_parseable#options()</code>
----------------	-----------------------------------------------------------------------------------------

## Returns

the parsed object

Implements `hocon::config_parseable`.

## 7.72.2.6 reader()

```
std::unique_ptr< std::istream > hocon::parseable_file::reader ( ) const [override], [virtual]
```


Implements `hocon::parseable`.

The documentation for this class was generated from the following file:

- internal/parseable.hpp

## 7.73 hocon::parseable\_not\_found Class Reference

Inheritance diagram for `hocon::parseable_not_found`:

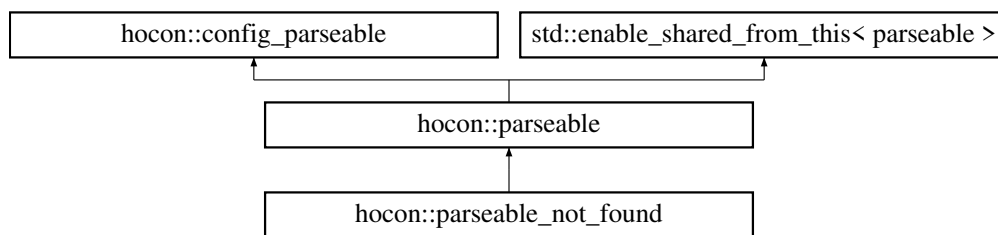

## Public Member Functions

- **parseable\_not\_found** (std::string what, std::string message, `config_parse_options options`)
- std::unique\_ptr< std::istream > **reader** () const override
- shared\_origin **create\_origin** () const override
- void **post\_construct** (`config_parse_options` const &base\_options)
- std::shared\_ptr< `config_document` > **parse\_config\_document** ()
- shared\_object **parse** (`config_parse_options` const &`options`) const override
  - Parse whatever it is.*
- shared\_object **parse** () const
- shared\_value **parse\_value** () const
- `config_parse_options` const & **options** () const override
  - Get the initial options, which can be modified then passed to `parse()`.*
- std::shared\_ptr< const `config_origin` > **origin** () const override
  - Returns a `config_origin` describing the origin of the parseable item.*
- virtual std::unique\_ptr< std::istream > **reader** (`config_parse_options` const &`options`) const
- virtual `config_syntax` **guess\_syntax** () const
- virtual `config_syntax` **content\_type** () const
- virtual std::shared\_ptr< `config_parseable` > **relative\_to** (std::string file\_name) const
- std::string **to\_string** () const
- std::string **get\_cur\_dir** () const
- void **set\_cur\_dir** (std::string dir) const
- void **separate\_filepath** (const std::string &`path`, std::string \*file\_dir, std::string \*file\_name) const

## Static Public Member Functions

- static std::shared\_ptr< [parseable](#) > **new\_file** (std::string input\_file\_path, [config\\_parse\\_options](#) options)
- static std::shared\_ptr< [parseable](#) > **new\_string** (std::string s, [config\\_parse\\_options](#) options)
- static std::shared\_ptr< [parseable](#) > **new\_not\_found** (std::string what\_not\_found, std::string message, [config\\_parse\\_options](#) options)
- static config\_syntax **syntax\_from\_extension** (std::string name)

### 7.73.1 Detailed Description

Definition at line 120 of file [parseable.hpp](#).

### 7.73.2 Member Function Documentation

#### 7.73.2.1 create\_origin()

```
shared_origin hocon::parseable_not_found::create_origin ( ) const [override], [virtual]
```

Implements [hocon::parseable](#).

#### 7.73.2.2 options()

```
config\_parse\_options const & hocon::parseable::options ( ) const [override], [virtual], [inherited]
```

Get the initial options, which can be modified then passed to [parse\(\)](#).

These options will have the right description, includer, and other parameters already set up.

Returns

the initial options

Implements [hocon::config\\_parseable](#).

#### 7.73.2.3 origin()

```
std::shared_ptr< const config\_origin > hocon::parseable::origin ( ) const [override], [virtual], [inherited]
```

Returns a [config\\_origin](#) describing the origin of the parseable item.

Implements [hocon::config\\_parseable](#).

#### 7.73.2.4 parse()

```
shared_object hocon::parseable::parse (
    config\_parse\_options const & options ) const [override], [virtual], [inherited]
```

Parse whatever it is.

The options should come from [config\\_parseable#options\(\)](#) but you could tweak them if you like.

## Parameters

<i>options</i>	parse options, should be based on the ones from <code>config_parseable#options()</code>
----------------	-----------------------------------------------------------------------------------------

## Returns

the parsed object

Implements [hocon::config\\_parseable](#).

## 7.73.2.5 reader()

```
std::unique_ptr< std::istream > hocon::parseable_not_found::reader ( ) const [override],
[virtual]
```


Implements [hocon::parseable](#).

The documentation for this class was generated from the following file:

- internal/parseable.hpp

## 7.74 hocon::parseable\_resources Class Reference

Inheritance diagram for hocon::parseable\_resources:

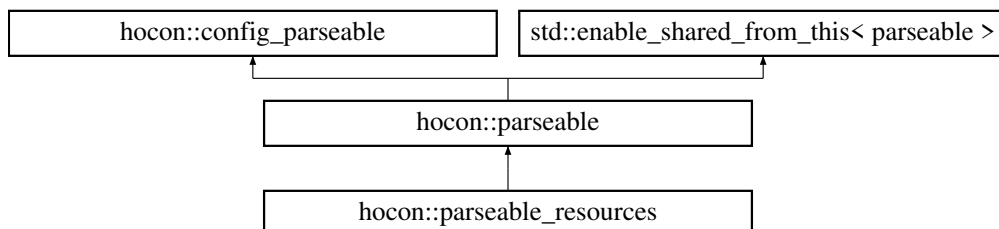

## Public Member Functions

- **parseable\_resources** (std::string resource, [config\\_parse\\_options](#) options)
- std::unique\_ptr< std::istream > **reader** () const override
- shared\_origin **create\_origin** () const override
- void **post\_construct** ([config\\_parse\\_options](#) const &base\_options)
- std::shared\_ptr< [config\\_document](#) > **parse\_config\_document** ()
- shared\_object **parse** ([config\\_parse\\_options](#) const &options) const override  
*Parse whatever it is.*
- shared\_object **parse** () const
- shared\_value **parse\_value** () const
- [config\\_parse\\_options](#) const & **options** () const override  
*Get the initial options, which can be modified then passed to [parse\(\)](#).*

- `std::shared_ptr< const config\_origin > origin ()` const override  
Returns a [config\\_origin](#) describing the origin of the paresable item.
- `virtual std::unique_ptr< std::istream > reader (config\_parse\_options const &options)` const
- `virtual config_syntax guess\_syntax ()` const
- `virtual config_syntax content\_type ()` const
- `virtual std::shared_ptr< config\_parseable > relative\_to (std::string file_name)` const
- `std::string to\_string ()` const
- `std::string get\_cur\_dir ()` const
- `void set\_cur\_dir (std::string dir)` const
- `void separate\_filepath (const std::string &path, std::string *file_dir, std::string *file_name)` const

## Static Public Member Functions

- `static std::shared_ptr< parseable > new\_file (std::string input_file_path, config\_parse\_options options)`
- `static std::shared_ptr< parseable > new\_string (std::string s, config\_parse\_options options)`
- `static std::shared_ptr< parseable > new\_not\_found (std::string what_not_found, std::string message, config\_parse\_options options)`
- `static config_syntax syntax\_from\_extension (std::string name)`

### 7.74.1 Detailed Description

Definition at line 107 of file [parseable.hpp](#).

### 7.74.2 Member Function Documentation

#### 7.74.2.1 `create_origin()`

```
shared_origin hocon::parseable_resources::create_origin ( ) const [override], [virtual]
```

Implements [hocon::parseable](#).

#### 7.74.2.2 `options()`

```
config\_parse\_options const & hocon::parseable::options ( ) const [override], [virtual], [inherited]
```

Get the initial options, which can be modified then passed to [parse\(\)](#).

These options will have the right description, includer, and other parameters already set up.

#### Returns

the initial options

Implements [hocon::config\\_parseable](#).



### 7.74.2.3 origin()

```
std::shared_ptr< const config_origin > hocon::parseable::origin ( ) const [override], [virtual], [inherited]
```

Returns a [config\\_origin](#) describing the origin of the parseable item.

Implements [hocon::config\\_parseable](#).

### 7.74.2.4 parse()

```
shared_object hocon::parseable::parse (
    config_parse_options const & options ) const [override], [virtual], [inherited]
```

Parse whatever it is.

The options should come from [config\\_parseable#options\(\)](#) but you could tweak them if you like.

#### Parameters

<i>options</i>	parse options, should be based on the ones from <a href="#">config_parseable#options()</a>
----------------	--------------------------------------------------------------------------------------------

#### Returns

the parsed object

Implements [hocon::config\\_parseable](#).

### 7.74.2.5 reader()

```
std::unique_ptr< std::istream > hocon::parseable_resources::reader ( ) const [override], [virtual]
```


Implements [hocon::parseable](#).

The documentation for this class was generated from the following file:

- [internal/parseable.hpp](#)

## 7.75 hocon::parseable\_string Class Reference

Inheritance diagram for [hocon::parseable\\_string](#):

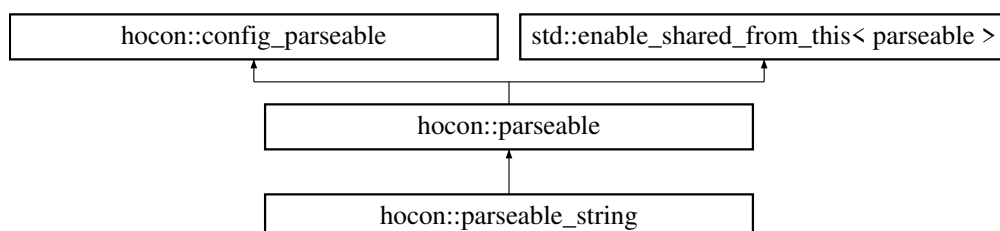

## Public Member Functions

- **parseable\_string** (std::string s, [config\\_parse\\_options options](#))
- std::unique\_ptr< std::istream > **reader** () const override
- shared\_origin **create\_origin** () const override
- void **post\_construct** ([config\\_parse\\_options](#) const &base\_options)
- std::shared\_ptr< [config\\_document](#) > **parse\_config\_document** ()
- shared\_object **parse** ([config\\_parse\\_options](#) const &[options](#)) const override  
*Parse whatever it is.*
- shared\_object **parse** () const
- shared\_value **parse\_value** () const
- [config\\_parse\\_options](#) const & **options** () const override  
*Get the initial options, which can be modified then passed to [parse\(\)](#).*
- std::shared\_ptr< const [config\\_origin](#) > **origin** () const override  
*Returns a [config\\_origin](#) describing the origin of the parseable item.*
- virtual std::unique\_ptr< std::istream > **reader** ([config\\_parse\\_options](#) const &[options](#)) const
- virtual config\_syntax **guess\_syntax** () const
- virtual config\_syntax **content\_type** () const
- virtual std::shared\_ptr< [config\\_parseable](#) > **relative\_to** (std::string file\_name) const
- std::string **to\_string** () const
- std::string **get\_cur\_dir** () const
- void **set\_cur\_dir** (std::string dir) const
- void **separate\_filepath** (const std::string &[path](#), std::string \*file\_dir, std::string \*file\_name) const

## Static Public Member Functions

- static std::shared\_ptr< [parseable](#) > **new\_file** (std::string input\_file\_path, [config\\_parse\\_options options](#))
- static std::shared\_ptr< [parseable](#) > **new\_string** (std::string s, [config\\_parse\\_options options](#))
- static std::shared\_ptr< [parseable](#) > **new\_not\_found** (std::string what\_not\_found, std::string message, [config\\_parse\\_options options](#))
- static config\_syntax **syntax\_from\_extension** (std::string name)

### 7.75.1 Detailed Description

Definition at line 90 of file [parseable.hpp](#).

### 7.75.2 Member Function Documentation

#### 7.75.2.1 create\_origin()

```
shared_origin hocon::parseable_string::create_origin ( ) const [override], [virtual]
```

Implements [hocon::parseable](#).

### 7.75.2.2 options()

```
config_parse_options const & hocon::parseable::options ( ) const [override], [virtual], [inherited]
```

Get the initial options, which can be modified then passed to [parse\(\)](#).

These options will have the right description, includer, and other parameters already set up.

#### Returns

the initial options

Implements [hocon::config\\_parseable](#).

### 7.75.2.3 origin()

```
std::shared_ptr< const config_origin > hocon::parseable::origin ( ) const [override], [virtual], [inherited]
```

Returns a [config\\_origin](#) describing the origin of the parseable item.

Implements [hocon::config\\_parseable](#).

### 7.75.2.4 parse()

```
shared_object hocon::parseable::parse (
    config_parse_options const & options ) const [override], [virtual], [inherited]
```

Parse whatever it is.

The options should come from [config\\_parseable#options\(\)](#) but you could tweak them if you like.

#### Parameters

<i>options</i>	parse options, should be based on the ones from <a href="#">config_parseable#options()</a>
----------------	--------------------------------------------------------------------------------------------

#### Returns

the parsed object

Implements [hocon::config\\_parseable](#).

### 7.75.2.5 reader()

```
std::unique_ptr< std::istream > hocon::parseable_string::reader ( ) const [override], [virtual]
```

Implements [hocon::parseable](#).

The documentation for this class was generated from the following file:

- [internal/parseable.hpp](#)

## 7.76 hocon::path Class Reference

### Public Member Functions

- **path** (std::string first, [path](#) const &remainder)
- **path** (std::vector< std::string > elements)
- **path** (std::vector< [path](#) > paths\_to\_concat)
- shared\_string **first** () const
- [path](#) **remainder** () const  
*Returns the path minus the first element, or null if no more elements.*
- [path](#) **parent** () const  
*Returns the path minus the last element or null if we have just one element.*
- bool **has\_remainder** () const
- bool **empty** () const
- shared\_string **last** () const
- [path](#) **prepend** ([path](#) prefix)
- int **length** () const
- [path](#) **sub\_path** (int remove\_from\_front)
- [path](#) **sub\_path** (int start\_index, int end\_index)
- bool **starts\_with** ([path](#) other) const
- bool **operator==** ([path](#) const &other) const
- bool **operator!=** ([path](#) const &other) const
- void **append\_to\_string** (std::string &base) const
- std::string **to\_string** () const  
*For debugging.*
- std::string **render** () const  
*Human-readable error-message-oriented string representation of path.*

### Static Public Member Functions

- static bool [has\\_funky\\_chars](#) (std::string const &s)  
*Signals whether quotes and other noise need to be removed/ignored.*
- static [path](#) **new\_key** (std::string key)
- static [path](#) **new\_path** (std::string [path](#))

### 7.76.1 Detailed Description

Definition at line 13 of file [path.hpp](#).

## 7.76.2 Member Function Documentation

### 7.76.2.1 has\_funky\_chars()

```
static bool hocon::path::has_funky_chars (
    std::string const & s ) [static]
```

Signals whether quotes and other noise need to be removed/ignored.

### 7.76.2.2 parent()

```
path hocon::path::parent ( ) const
```

Returns the path minus the last element or null if we have just one element.

### 7.76.2.3 remainder()

```
path hocon::path::remainder ( ) const
```

Returns the path minus the first element, or null if no more elements.

### 7.76.2.4 render()

```
std::string hocon::path::render ( ) const
```

Human-readable error-message-oriented string representation of path.

### 7.76.2.5 to\_string()

```
std::string hocon::path::to_string ( ) const
```

For debugging.

The documentation for this class was generated from the following file:

- hocon/path.hpp

## 7.77 hocon::path\_builder Class Reference

### Public Member Functions

- void **append\_key** (std::string key)
- void **append\_path** ([path](#) path\_to\_append)
- [path result](#) ()

*Returns null if keys is empty.*

#### 7.77.1 Detailed Description

Definition at line 8 of file [path\\_builder.hpp](#).

#### 7.77.2 Member Function Documentation

##### 7.77.2.1 result()

```
path hocon::path_builder::result ( )
```

Returns null if keys is empty.

The documentation for this class was generated from the following file:

- internal/path\_builder.hpp

## 7.78 hocon::path\_parser Class Reference

### Static Public Member Functions

- static [config\\_node\\_path](#) **parse\_path\_node** (std::string const &path\_string, config\_syntax flavor=config\_↵ syntax::CONF)
- static [path](#) **parse\_path** (std::string const &path\_string)
- static [path](#) **parse\_path\_expression** ([iterator](#) &expression, shared\_origin origin, std::string const &original↵ \_text="", token\_list \*path\_tokens=nullptr, config\_syntax flavor=config\_syntax::CONF)
- static [config\\_node\\_path](#) **parse\_path\_node\_expression** ([iterator](#) &expression, shared\_origin origin, std↵ ::string const &original\_text="", config\_syntax flavor=config\_syntax::CONF)

#### 7.78.1 Detailed Description


Definition at line 14 of file [path\\_parser.hpp](#).

The documentation for this class was generated from the following file:

- internal/path\_parser.hpp

## 7.79 hocon::problem Class Reference

Inheritance diagram for hocon::problem:



### Public Member Functions

- **problem** (shared\_origin origin, std::string what, std::string message, bool suggest\_quotes)
- std::string **what** () const
- std::string **message** () const
- bool **suggest\_quotes** () const
- std::string **to\_string** () const override
- bool **operator==** (const [token](#) &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual std::string **token\_text** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const

### 7.79.1 Detailed Description

Definition at line 51 of file [tokens.hpp](#).

### 7.79.2 Member Function Documentation

#### 7.79.2.1 operator==( )

```
bool hocon::problem::operator== (
    const token & other ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

#### 7.79.2.2 to\_string()

```
std::string hocon::problem::to_string ( ) const [override], [virtual]
```


Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:

- internal/tokens.hpp

## 7.80 hocon::problem\_exception Class Reference

Inheritance diagram for hocon::problem\_exception:



### Public Member Functions

- **problem\_exception** ([problem](#) prob)
- [problem](#) const & **get\_problem** () const

#### 7.80.1 Detailed Description


Definition at line 15 of file [tokenizer.hpp](#).

The documentation for this class was generated from the following file:

- internal/tokenizer.hpp

## 7.81 hocon::relative\_name\_source Class Reference

Inheritance diagram for hocon::relative\_name\_source:



### Public Member Functions

- **relative\_name\_source** (shared\_include\_context context)
- shared\_parseable [name\\_to\\_parseable](#) (std::string name, [config\\_parse\\_options](#) parse\_options) const override
- void [set\\_context](#) (shared\_include\_context context)
- shared\_include\_context [get\\_context](#) () const
- bool [context\\_initialized](#) () const

#### 7.81.1 Detailed Description

Definition at line 90 of file [simple\\_includer.hpp](#).



## 7.81.2 Member Function Documentation

### 7.81.2.1 context\_initialized()

```
bool hocon::name_source::context_initialized ( ) const [inline], [inherited]
```

Definition at line 81 of file [simple\\_includer.hpp](#).

### 7.81.2.2 get\_context()

```
shared_include_context hocon::name_source::get_context ( ) const [inline], [inherited]
```

Definition at line 77 of file [simple\\_includer.hpp](#).

### 7.81.2.3 name\_to\_parseable()

```
shared_parseable hocon::relative_name_source::name_to_parseable (
    std::string name,
    config_parse_options parse_options ) const [override], [virtual]
```

Implements [hocon::name\\_source](#).

### 7.81.2.4 set\_context()

```
void hocon::name_source::set_context (
    shared_include_context context ) [inline], [inherited]
```


Definition at line 70 of file [simple\\_includer.hpp](#).

The documentation for this class was generated from the following file:

- [internal/simple\\_includer.hpp](#)

## 7.82 hocon::replaceable\_merge\_stack Class Reference

Inheritance diagram for `hocon::replaceable_merge_stack`:

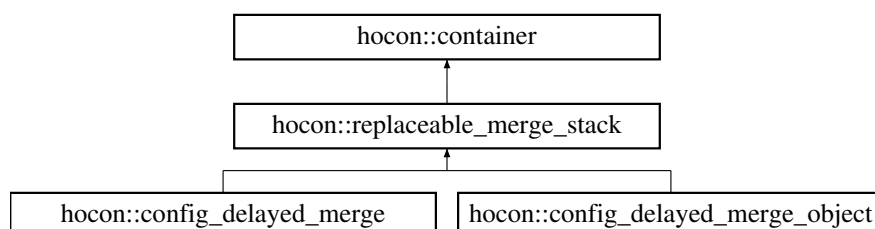

## Public Member Functions

- virtual shared\_value **make\_replacement** ([resolve\\_context](#) const &context, int skipping) const =0
- virtual shared\_value **replace\_child** (shared\_value const &child, shared\_value replacement) const =0  
*Replace a child of this value.*
- virtual bool **has\_descendant** (shared\_value const &descendant) const =0  
*Super-expensive full traversal to see if descendant is anywhere underneath this container.*

### 7.82.1 Detailed Description

Definition at line 9 of file [replaceable\\_merge\\_stack.hpp](#).

### 7.82.2 Member Function Documentation

#### 7.82.2.1 has\_descendant()

```
virtual bool hocon::container::has_descendant (
    shared_value const & descendant ) const [pure virtual], [inherited]
```

Super-expensive full traversal to see if descendant is anywhere underneath this container.

Implemented in [hocon::config\\_concatenation](#), [hocon::config\\_delayed\\_merge](#), [hocon::config\\_delayed\\_merge\\_object](#), [hocon::simple\\_config\\_list](#), and [hocon::simple\\_config\\_object](#).

#### 7.82.2.2 replace\_child()

```
virtual shared_value hocon::container::replace_child (
    shared_value const & child,
    shared_value replacement ) const [pure virtual], [inherited]
```

Replace a child of this value.

CAUTION if replacement is null, delete the child, which may also delete the parent, or make the parent into a non-container.

Implemented in [hocon::config\\_concatenation](#), [hocon::config\\_delayed\\_merge](#), [hocon::config\\_delayed\\_merge\\_object](#), [hocon::simple\\_config\\_list](#), and [hocon::simple\\_config\\_object](#).

The documentation for this class was generated from the following file:

- [internal/replaceable\\_merge\\_stack.hpp](#)

## 7.83 hocon::resolve\_context Class Reference

### Public Member Functions

- **resolve\_context** ([config\\_resolve\\_options](#) options, [path](#) restrict\_to\_child, std::vector< shared\_value > cycle\_markers)
- **resolve\_context** ([config\\_resolve\\_options](#) options, [path](#) restrict\_to\_child)
- bool **is\_restricted\_to\_child** () const
- [config\\_resolve\\_options](#) **options** () const
- [resolve\\_result](#)< shared\_value > **resolve** (shared\_value original, [resolve\\_source](#) const &source) const
- [path](#) **restrict\_to\_child** () const
- [resolve\\_context](#) **add\_cycle\_marker** (shared\_value [value](#)) const
- [resolve\\_context](#) **remove\_cycle\_marker** (shared\_value [value](#))
- [resolve\\_context](#) **restrict** ([path](#) restrict\_to) const
- [resolve\\_context](#) **unrestricted** () const

### Static Public Member Functions

- static shared\_value **resolve** (shared\_value [value](#), shared\_object root, [config\\_resolve\\_options](#) options)

#### 7.83.1 Detailed Description

Definition at line 16 of file [resolve\\_context.hpp](#).

The documentation for this class was generated from the following file:

- internal/resolve\_context.hpp

## 7.84 hocon::resolve\_result< V > Struct Template Reference

### Public Member Functions

- [resolve\\_result](#) ([resolve\\_context](#) c, V v)

### Public Attributes

- [resolve\\_context](#) context
- V [value](#)

#### 7.84.1 Detailed Description

```
template<typename V>
struct hocon::resolve_result< V >
```

Definition at line 8 of file [resolve\\_result.hpp](#).

## 7.84.2 Constructor & Destructor Documentation

### 7.84.2.1 resolve\_result()

```
template<typename V >
hocon::resolve_result< V >::resolve_result (
    resolve_context c,
    V v ) [inline]
```

Definition at line 9 of file [resolve\\_result.hpp](#).

## 7.84.3 Member Data Documentation

### 7.84.3.1 context

```
template<typename V >
resolve_context hocon::resolve_result< V >::context
```

Definition at line 12 of file [resolve\\_result.hpp](#).

### 7.84.3.2 value

```
template<typename V >
V hocon::resolve_result< V >::value
```

Definition at line 13 of file [resolve\\_result.hpp](#).

The documentation for this struct was generated from the following files:

- [hocon/config\\_value.hpp](#)
- [internal/resolve\\_result.hpp](#)

## 7.85 hocon::resolve\_source Class Reference

### Classes

- struct [result\\_with\\_path](#)

## Public Types

- typedef std::list< std::shared\_ptr< const [container](#) > > [node](#)

## Public Member Functions

- [resolve\\_source](#) (shared\_object root)
- [resolve\\_source](#) (shared\_object root, node path\_from\_root)
- [resolve\\_source](#) [push\\_parent](#) (std::shared\_ptr< const [container](#) > parent) const
- [result\\_with\\_path](#) [lookup\\_subst](#) ([resolve\\_context](#) context, std::shared\_ptr< [substitution\\_expression](#) > subst, int prefix\_length) const
- [resolve\\_source](#) [replace\\_current\\_parent](#) (std::shared\_ptr< const [container](#) > old, std::shared\_ptr< const [container](#) > replacement) const
- [resolve\\_source](#) [replace\\_within\\_current\\_parent](#) (shared\_value old, shared\_value replacement) const
- [resolve\\_source](#) [reset\\_parents](#) () const

### 7.85.1 Detailed Description

Definition at line 15 of file [resolve\\_source.hpp](#).

### 7.85.2 Member Typedef Documentation

#### 7.85.2.1 node

```
typedef std::list<std::shared_ptr<const container> > hocon::resolve_source::node
```

Definition at line 17 of file [resolve\\_source.hpp](#).

The documentation for this class was generated from the following file:

- internal/resolve\_source.hpp

## 7.86 hocon::resolve\_source::result\_with\_path Struct Reference

### Public Member Functions

- [result\\_with\\_path](#) ([resolve\\_result](#)< shared\_value > result\_value, node path\_from\_root\_value)

### Public Attributes

- [resolve\\_result](#)< shared\_value > [result](#)
- node [path\\_from\\_root](#)

### 7.86.1 Detailed Description

Definition at line 19 of file [resolve\\_source.hpp](#).

### 7.86.2 Member Data Documentation

#### 7.86.2.1 path\_from\_root

`node hocon::resolve_source::result_with_path::path_from_root`

Definition at line 21 of file [resolve\\_source.hpp](#).

#### 7.86.2.2 result

`resolve_result<shared_value> hocon::resolve_source::result_with_path::result`


Definition at line 20 of file [resolve\\_source.hpp](#).

The documentation for this struct was generated from the following file:

- `internal/resolve_source.hpp`

## 7.87 hocon::simple\_config\_document Class Reference

Inheritance diagram for `hocon::simple_config_document`:



### Public Member Functions

- **simple\_config\_document** (`std::shared_ptr< const config\_node\_root > root`, `config\_parse\_options opts`)
- `std::unique_ptr< config\_document > with_value_text` (`std::string path`, `std::string new_value`) `const` override  
*Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.*
- `std::unique_ptr< config\_document > with_value` (`std::string path`, `std::shared_ptr< config\_value > new_value`) `const` override  
*Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.*
- `std::unique_ptr< config\_document > without_path` (`std::string path`) `const` override  
*Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with all values at the desired path removed.*
- `bool has_path` (`std::string const &path`) `const` override  
*Returns a boolean indicating whether or not a [config\\_document](#) has a value at the desired path.*
- `std::string render` () `const` override  
*The original text of the input, modified if necessary with any replaced or added values.*

### 7.87.1 Detailed Description

Definition at line 10 of file [simple\\_config\\_document.hpp](#).

### 7.87.2 Member Function Documentation

#### 7.87.2.1 has\_path()

```
bool hocon::simple_config_document::has_path (
    std::string const & path ) const [override], [virtual]
```

Returns a boolean indicating whether or not a [config\\_document](#) has a value at the desired path.

null counts as a value for purposes of this check.

##### Parameters

<i>path</i>	the path to check
-------------	-------------------

##### Returns

true if the path exists in the document, otherwise false

Implements [hocon::config\\_document](#).

#### 7.87.2.2 render()

```
std::string hocon::simple_config_document::render ( ) const [override], [virtual]
```

The original text of the input, modified if necessary with any replaced or added values.

##### Returns

the modified original text

Implements [hocon::config\\_document](#).

#### 7.87.2.3 with\_value()

```
std::unique_ptr< config_document > hocon::simple_config_document::with_value (
    std::string path,
    std::shared_ptr< config_value > new_value ) const [override], [virtual]
```

Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.

Works like `with_value_text (string, string)`, but takes a [config\\_value](#) instead of a string.

## Parameters

<i>path</i>	the path at which to set the desired value
<i>new_value</i>	the value to set at the desired path, represented as a ConfigValue. The rendered text of the ConfigValue will be inserted into the <a href="#">config_document</a> .

## Returns

a copy of the [config\\_document](#) with the desired value at the desired path

Implements [hocon::config\\_document](#).

**7.87.2.4 with\_value\_text()**

```
std::unique_ptr< config\_document > hocon::simple_config_document::with_value_text (
    std::string path,
    std::string newValue ) const [override], [virtual]
```

Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with the desired value set at the desired path.

If the path exists, it will remove all duplicates before the final occurrence of the path, and replace the value at the final occurrence of the path. If the path does not exist, it will be added. If the document has an array as the root value, an exception will be thrown.

## Parameters

<i>path</i>	the path at which to set the desired value
<i>new_value</i>	the value to set at the desired path, represented as a string. This string will be parsed into a <a href="#">config_node</a> using the same options used to parse the entire document, and the text will be inserted as-is into the document. Leading and trailing comments, whitespace, or newlines are not allowed, and if present an exception will be thrown. If a concatenation is passed in for newValue but the document was parsed with JSON, the first value in the concatenation will be parsed and inserted into the <a href="#">config_document</a> .

## Returns

a copy of the [config\\_document](#) with the desired value at the desired path

Implements [hocon::config\\_document](#).

**7.87.2.5 without\_path()**

```
std::unique_ptr< config\_document > hocon::simple_config_document::without_path (
    std::string path ) const [override], [virtual]
```



Returns a new [config\\_document](#) that is a copy of the current [config\\_document](#), but with all values at the desired path removed.

If the path does not exist in the document, a copy of the current document will be returned. If there is an array at the root, an exception will be thrown.

## Parameters

<code>path</code>	the path to remove from the document
-------------------	--------------------------------------

## Returns

a copy of the [config\\_document](#) with the desired value removed from the document.


Implements [hocon::config\\_document](#).

The documentation for this class was generated from the following file:

- `internal/simple_config_document.hpp`

## 7.88 hocon::simple\_config\_list Class Reference

Inheritance diagram for `hocon::simple_config_list`:

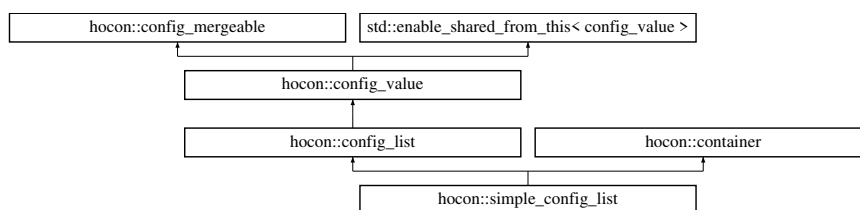

### Public Types

- using `iterator` = `std::vector< shared_value >::const_iterator`
- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the [JSON](#) type schema).*

### Public Member Functions

- `simple_config_list` (shared\_origin [origin](#), std::vector< shared\_value > [value](#))
- `simple_config_list` (shared\_origin [origin](#), std::vector< shared\_value > [value](#), resolve\_status status)
- `config_value::type value_type` () const override  
*The type of the value; matches the JSON type schema.*
- resolve\_status `get_resolve_status` () const override
- shared\_value `replace_child` (shared\_value const &child, shared\_value replacement) const override  
*Replace a child of this value.*
- bool `has_descendant` (shared\_value const &descendant) const override  
*Super-expensive full traversal to see if descendant is anywhere underneath this container.*
- shared\_value `relativized` (const std::string prefix) const override  
*This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
- bool `contains` (shared\_value v) const

- bool **contains\_all** (std::vector< shared\_value >) const
- int **index\_of** (shared\_value v)
- bool **is\_empty** () const override
- size\_t **size** () const override
- shared\_value **operator[]** (size\_t index) const override
- shared\_value **get** (size\_t index) const override
- iterator **begin** () const override
- iterator **end** () const override
- std::shared\_ptr< const **simple\_config\_list** > **concatenate** (std::shared\_ptr< const **simple\_config\_list** > other) const
- unwrapped\_value **unwrapped** () const override
- bool **operator==** (config\_value const &other) const override
- virtual shared\_origin const & **origin** () const  
*The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* **value\_type\_name** () const  
*The printable name of the value type.*
- virtual std::string **render** () const  
*Renders the config value as a HOCON string.*
- virtual std::string **render** (config\_render\_options options) const  
*Renders the config value to a string, using the provided options.*
- shared\_config **at\_key** (std::string const &key) const  
*Places the value inside a **config** at the given key.*
- shared\_config **at\_path** (std::string const &path\_expression) const  
*Places the value inside a **config** at the given path.*
- virtual shared\_value **with\_origin** (shared\_origin origin) const  
*Returns a **config\_value** based on this one, but with the given origin.*
- std::shared\_ptr< const **config\_mergeable** > **with\_fallback** (std::shared\_ptr< const **config\_mergeable** > other) const override  
*Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
- virtual std::string **transform\_to\_string** () const

## Static Public Member Functions

- static char const \* **type\_name** (type t)

## Protected Member Functions

- **resolve\_result**< shared\_value > **resolve\_substitutions** (resolve\_context const &context, resolve\_source const &source) const override
- shared\_value **new\_copy** (shared\_origin origin) const override
- void **render** (std::string &result, int indent, bool at\_root, config\_render\_options options) const override
- virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, config\_render\_options options) const
- shared\_config **at\_key** (shared\_origin origin, std::string const &key) const
- shared\_config **at\_path** (shared\_origin origin, path raw\_path) const
- void **require\_not\_ignoring\_fallbacks** () const
- virtual bool **ignores\_fallbacks** () const
- virtual shared\_value **with\_fallbacks\_ignored** () const
- shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const **unmergeable** > fallback) const
- shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const **unmergeable** > fallback) const

- shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
- virtual shared\_value **merged\_with\_object** (shared\_object fallback) const
- shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
- shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
- virtual shared\_value **construct\_delayed\_merge** (shared\_origin [origin](#), std::vector< shared\_value > stack) const
- shared\_value [to\\_fallback\\_value](#) () const override

*Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool [equals](#) ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.88.1 Detailed Description

Definition at line 15 of file [simple\\_config\\_list.hpp](#).

### 7.88.2 Member Typedef Documentation

#### 7.88.2.1 iterator

```
using hocon::config_list::iterator = std::vector<shared_value>::const_iterator [inherited]
```

Definition at line 42 of file [config\\_list.hpp](#).

### 7.88.3 Member Enumeration Documentation

#### 7.88.3.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

## 7.88.4 Member Function Documentation

### 7.88.4.1 at\_key()

```
shared_config hocon::config_value::at_key (
    std::string const & key ) const    [inherited]
```

Places the value inside a `config` at the given key.

See also `config_value#at_path(string)`.

**Parameters**

<i>key</i>	key to store this value at.
------------	-----------------------------

**Returns**

a `config` instance containing this value at the given key.

**7.88.4.2 at\_path()**

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a `config` at the given path.

See also `config_value#at_key(String)`.

**Parameters**

<i>path</i>	path to store this value at.
-------------	------------------------------

**Returns**

a `config` instance containing this value at the given path.

**7.88.4.3 begin()**

```
iterator hocon::simple_config_list::begin ( ) const [inline], [override], [virtual]
```

Implements `hocon::config_list`.

Definition at line 45 of file `simple_config_list.hpp`.

**7.88.4.4 contains()**

```
bool hocon::simple_config_list::contains (
    shared_value v ) const [inline]
```

Definition at line 28 of file `simple_config_list.hpp`.

#### 7.88.4.5 end()

```
iterator hocon::simple_config_list::end ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_list](#).

Definition at line 46 of file [simple\\_config\\_list.hpp](#).

#### 7.88.4.6 equals()

```
template<typename T >  
static bool hocon::config_value::equals (   
    config\_value const & other,  
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

#### 7.88.4.7 get()

```
shared_value hocon::simple_config_list::get (   
    size_t index ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_list](#).

Definition at line 44 of file [simple\\_config\\_list.hpp](#).

#### 7.88.4.8 get\_resolve\_status()

```
resolve_status hocon::simple_config_list::get_resolve_status ( ) const [inline], [override],  
[virtual]
```

Reimplemented from [hocon::config\\_value](#).

Definition at line 21 of file [simple\\_config\\_list.hpp](#).

#### 7.88.4.9 has\_descendant()

```
bool hocon::simple_config_list::has_descendant (   
    shared_value const & descendant ) const [override], [virtual]
```

Super-expensive full traversal to see if descendant is anywhere underneath this container.

Implements [hocon::container](#).

#### 7.88.4.10 `index_of()`

```
int hocon::simple_config_list::index_of (
    shared_value v ) [inline]
```

Definition at line 31 of file [simple\\_config\\_list.hpp](#).

#### 7.88.4.11 `is_empty()`

```
bool hocon::simple_config_list::is_empty ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_list](#).

Definition at line 41 of file [simple\\_config\\_list.hpp](#).

#### 7.88.4.12 `new_copy()`

```
shared_value hocon::simple_config_list::new_copy (
    shared_origin origin ) const [override], [protected], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.88.4.13 `operator==( )`

```
bool hocon::simple_config_list::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.88.4.14 `operator[]()`

```
shared_value hocon::simple_config_list::operator[] (
    size_t index ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_list](#).

Definition at line 43 of file [simple\\_config\\_list.hpp](#).



**7.88.4.15 origin()**

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

**Returns**

where the value came from

**7.88.4.16 relativized()**

```
shared_value hocon::simple_config_list::relativized (
    const std::string prefix ) const [override], [virtual]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

**Parameters**

<i>prefix</i>	
---------------	--

**Returns**

value relativized to the given path or the same value if nothing to do

Reimplemented from [hocon::config\\_value](#).

**7.88.4.17 render() [1/3]**

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.88.4.18 render()** [2/3]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.88.4.19 render()** [3/3]

```
void hocon::simple_config_list::render (
    std::string & result,
    int indent,
    bool at_root,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.88.4.20 replace\_child()**

```
shared_value hocon::simple_config_list::replace_child (
    shared_value const & child,
    shared_value replacement ) const [override], [virtual]
```

Replace a child of this value.

CAUTION if replacement is null, delete the child, which may also delete the parent, or make the parent into a non-container.

Implements [hocon::container](#).

#### 7.88.4.21 resolve\_substitutions()

```
resolve_result< shared_value > hocon::simple_config_list::resolve_substitutions (
    resolve_context const & context,
    resolve_source const & source ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.88.4.22 size()

```
size_t hocon::simple_config_list::size ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_list](#).

Definition at line 42 of file [simple\\_config\\_list.hpp](#).

#### 7.88.4.23 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the MergeableValue interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.88.4.24 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.88.4.25 unwrapped()

```
unwrapped_value hocon::simple_config_list::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_list](#).

**7.88.4.26 value\_type()**

```
config_value::type hocon::simple_config_list::value_type ( ) const [inline], [override], [virtual]
```

The type of the value; matches the JSON type schema.

**Returns**

value's type

Implements [hocon::config\\_value](#).

Definition at line 20 of file [simple\\_config\\_list.hpp](#).

**7.88.4.27 value\_type\_name()**

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

**Returns**

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).

**7.88.4.28 with\_fallback()**

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual], [inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

## Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

## Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

## 7.88.4.29 with\_origin()

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

## Parameters

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

## Returns


the new [config\\_value](#) with the given origin

The documentation for this class was generated from the following file:

- internal/values/simple\_config\_list.hpp

## 7.89 hocon::simple\_config\_object Class Reference

Inheritance diagram for `hocon::simple_config_object`:

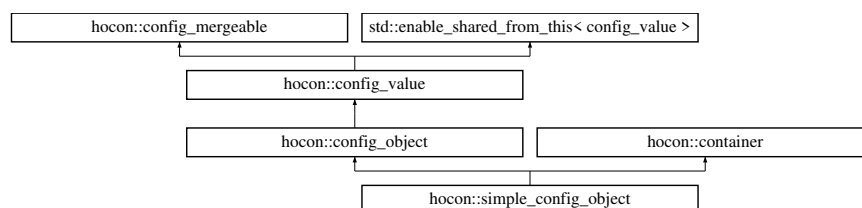

## Public Types

- using `iterator` = `std::unordered_map< std::string, shared_value >::const_iterator`
- enum class `type` {  
**OBJECT** , **LIST** , **NUMBER** , **BOOLEAN** ,  
**CONFIG\_NULL** , **STRING** , **UNSPECIFIED** }

*The type of a configuration value (following the `JSON` type schema).*

## Public Member Functions

- **simple\_config\_object** (shared\_origin `origin`, `std::unordered_map< std::string, shared_value > value`, `resolve_status` status, bool `ignores_fallbacks`)
- **simple\_config\_object** (shared\_origin `origin`, `std::unordered_map< std::string, shared_value > value`)
- shared\_value `attempt_peek_with_partial_resolve` (`std::string` const &key) const override

*Look up the key on an only-partially-resolved object, with no transformation or type conversion of any kind; if 'this' is not resolved then try to look up the key anyway if possible.*

- bool `is_empty` () const override
  - size\_t `size` () const override
  - shared\_value `operator[]` (`std::string` const &key) const override
  - iterator `begin` () const override
  - iterator `end` () const override
  - unwrapped\_value `unwrapped` () const override
  - shared\_value `get` (`std::string` const &key) const override
  - `std::unordered_map< std::string, shared_value >` const & `entry_set` () const override
  - resolve\_status `get_resolve_status` () const override
  - bool `ignores_fallbacks` () const override
  - shared\_value `with_fallbacks_ignored` () const override
  - shared\_value `merged_with_object` (shared\_object fallback) const override
  - shared\_object `with_value` (`path` raw\_path, shared\_value `value`) const override
  - shared\_object `with_value` (`std::string` key, shared\_value `value`) const override
  - shared\_object `without_path` (`path` raw\_path) const override
  - shared\_object `with_only_path` (`path` raw\_path) const override
  - shared\_object `with_only_path_or_null` (`path` raw\_path) const override
- Gets the object with only the path if the path exists, otherwise null if it doesn't.*
- shared\_value `replace_child` (shared\_value const &child, shared\_value replacement) const override
- Replace a child of this value.*
- bool `has_descendant` (shared\_value const &descendant) const override
- Super-expensive full traversal to see if descendant is anywhere underneath this container.*
- `std::vector< std::string >` `key_set` () const override
- Construct a list of keys in the \_value map.*
- `std::vector< shared_value >` `value_set` (`std::unordered_map< std::string, shared_value >` m) const
- Construct a list of the values from the provided map.*
- bool `operator==` (`config_value` const &other) const override
  - virtual `std::shared_ptr< const config >` `to_config` () const
- Converts this object to a `Config` instance, enabling you to use path expressions to find values in the object.*
- `config_value::type` `value_type` () const override
- The type of the value; matches the `JSON` type schema.*
- virtual shared\_origin const & `origin` () const
- The origin of the value (file, line number, etc.), for debugging and error messages.*
- char const \* `value_type_name` () const
- The printable name of the value type.*
- virtual `std::string` `render` () const

- Renders the config value as a HOCON string.*
  - virtual std::string **render** ([config\\_render\\_options](#) options) const
- Renders the config value to a string, using the provided options.*
  - shared\_config **at\_key** (std::string const &key) const
- Places the value inside a [config](#) at the given key.*
  - shared\_config **at\_path** (std::string const &path\_expression) const
- Places the value inside a [config](#) at the given path.*
  - virtual shared\_value **with\_origin** (shared\_origin [origin](#)) const
- Returns a [config\\_value](#) based on this one, but with the given origin.*
  - virtual shared\_value **relativized** (std::string prefix) const
- This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.*
  - std::shared\_ptr< const [config\\_mergeable](#) > **with\_fallback** (std::shared\_ptr< const [config\\_mergeable](#) > other) const override
- Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.*
  - virtual std::string **transform\_to\_string** () const

## Static Public Member Functions

- static std::shared\_ptr< [simple\\_config\\_object](#) > **empty** ()
- static std::shared\_ptr< [simple\\_config\\_object](#) > **empty** (shared\_origin [origin](#))
- static std::shared\_ptr< [simple\\_config\\_object](#) > **empty\_instance** ()
- static char const \* **type\_name** (type t)

## Protected Member Functions

- [resolve\\_result](#)< shared\_value > **resolve\_substitutions** ([resolve\\_context](#) const &context, [resolve\\_source](#) const &source) const override
  - shared\_value **new\_copy** (shared\_origin) const override
  - void **render** (std::string &s, int indent, bool at\_root, [config\\_render\\_options](#) options) const override
  - shared\_value **peek\_path** ([path](#) desired\_path) const
  - shared\_value **peek\_assuming\_resolved** (std::string const &key, [path](#) original\_path) const
  - shared\_value **construct\_delayed\_merge** (shared\_origin [origin](#), std::vector< shared\_value > stack) const override
  - virtual void **render** (std::string &result, int indent, bool at\_root, std::string const &at\_key, [config\\_render\\_options](#) options) const
  - shared\_config **at\_key** (shared\_origin [origin](#), std::string const &key) const
  - shared\_config **at\_path** (shared\_origin [origin](#), [path](#) raw\_path) const
  - void **require\_not\_ignoring\_fallbacks** () const
  - shared\_value **merged\_with\_the\_unmergeable** (std::vector< shared\_value > stack, std::shared\_ptr< const [unmergeable](#) > fallback) const
  - shared\_value **merged\_with\_the\_unmergeable** (std::shared\_ptr< const [unmergeable](#) > fallback) const
  - shared\_value **merged\_with\_object** (std::vector< shared\_value > stack, shared\_object fallback) const
  - shared\_value **merged\_with\_non\_object** (std::vector< shared\_value > stack, shared\_value fallback) const
  - shared\_value **merged\_with\_non\_object** (shared\_value fallback) const
  - shared\_value **to\_fallback\_value** () const override
- Converts a config to its root object and a [config\\_value](#) to itself.*

## Static Protected Member Functions

- static shared\_value **peek\_path** (const [config\\_object](#) \*self, [path](#) desired\_path)
- static shared\_origin **merge\_origins** (std::vector< shared\_value > const &stack)
- static void **indent** (std::string &result, int indent, [config\\_render\\_options](#) const &options)
- static std::vector< shared\_value > **replace\_child\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &child, shared\_value replacement)
- static bool **has\_descendant\_in\_list** (std::vector< shared\_value > const &values, shared\_value const &descendant)
- template<typename T >  
static bool **equals** ([config\\_value](#) const &other, std::function< bool(T const &)> checker)

### 7.89.1 Detailed Description

Definition at line 11 of file [simple\\_config\\_object.hpp](#).

### 7.89.2 Member Typedef Documentation

#### 7.89.2.1 iterator

```
using hocon::config_object::iterator = std::unordered_map<std::string, shared_value>::const_iterator [inherited]
```

Definition at line 55 of file [config\\_object.hpp](#).

### 7.89.3 Member Enumeration Documentation

#### 7.89.3.1 type

```
enum class hocon::config_value::type [strong], [inherited]
```

The type of a configuration value (following the [JSON](#) type schema).

Definition at line 56 of file [config\\_value.hpp](#).

### 7.89.4 Member Function Documentation

#### 7.89.4.1 at\_key()

```
shared_config hocon::config_value::at_key (
    std::string const & key ) const [inherited]
```

Places the value inside a [config](#) at the given key.

See also [config\\_value#at\\_path\(string\)](#).



## Parameters

<i>key</i>	key to store this value at.
------------	-----------------------------

## Returns

a `config` instance containing this value at the given key.

### 7.89.4.2 at\_path()

```
shared_config hocon::config_value::at_path (
    std::string const & path_expression ) const [inherited]
```

Places the value inside a `config` at the given path.

See also `config_value#at_key(String)`.

## Parameters

<i>path</i>	path to store this value at.
-------------	------------------------------

## Returns

a `config` instance containing this value at the given path.

### 7.89.4.3 attempt\_peek\_with\_partial\_resolve()

```
shared_value hocon::simple_config_object::attempt_peek_with_partial_resolve (
    std::string const & key ) const [override], [virtual]
```

Look up the key on an only-partially-resolved object, with no transformation or type conversion of any kind; if 'this' is not resolved then try to look up the key anyway if possible.

## Parameters

<i>key</i>	key to look up
------------	----------------

## Returns

the value of the key, or null if known not to exist

## Exceptions

<a href="#"><i>config_exception</i></a>	if can't figure out key's value (or existence) without more resolving
-----------------------------------------	-----------------------------------------------------------------------

Implements [hocon::config\\_object](#).

#### 7.89.4.4 begin()

```
iterator hocon::simple_config_object::begin ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 24 of file [simple\\_config\\_object.hpp](#).

#### 7.89.4.5 construct\_delayed\_merge()

```
shared_value hocon::config_object::construct_delayed_merge (
    shared_origin origin,
    std::vector< shared_value > stack ) const [override], [protected], [virtual],
[inherited]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.89.4.6 end()

```
iterator hocon::simple_config_object::end ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 25 of file [simple\\_config\\_object.hpp](#).

#### 7.89.4.7 entry\_set()

```
std::unordered_map< std::string, shared_value > const & hocon::simple_config_object::entry_set
( ) const [override], [virtual]
```

Implements [hocon::config\\_object](#).

#### 7.89.4.8 equals()

```
template<typename T >
static bool hocon::config_value::equals (
    config_value const & other,
    std::function< bool(T const &)> checker ) [inline], [static], [protected], [inherited]
```

Definition at line 250 of file [config\\_value.hpp](#).

#### 7.89.4.9 get()

```
shared_value hocon::simple_config_object::get (
    std::string const & key ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 28 of file [simple\\_config\\_object.hpp](#).

#### 7.89.4.10 get\_resolve\_status()

```
resolve_status hocon::simple_config_object::get_resolve_status ( ) const [inline], [override],
[virtual]
```

Reimplemented from [hocon::config\\_value](#).

Definition at line 37 of file [simple\\_config\\_object.hpp](#).

#### 7.89.4.11 has\_descendant()

```
bool hocon::simple_config_object::has_descendant (
    shared_value const & descendant ) const [override], [virtual]
```

Super-expensive full traversal to see if descendant is anywhere underneath this container.

Implements [hocon::container](#).

#### 7.89.4.12 ignores\_fallbacks()

```
bool hocon::simple_config_object::ignores_fallbacks ( ) const [inline], [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

Definition at line 38 of file [simple\\_config\\_object.hpp](#).

#### 7.89.4.13 is\_empty()

```
bool hocon::simple_config_object::is_empty ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 21 of file [simple\\_config\\_object.hpp](#).

#### 7.89.4.14 `key_set()`

```
std::vector< std::string > hocon::simple_config_object::key_set ( ) const [override], [virtual]
```

Construct a list of keys in the `_value` map.

Use a vector rather than set, because most of the time we just want to iterate over them.

Implements [hocon::config\\_object](#).

#### 7.89.4.15 `merged_with_object()`

```
shared_value hocon::simple_config_object::merged_with_object (
    shared_object fallback ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.89.4.16 `new_copy()`

```
shared_value hocon::simple_config_object::new_copy (
    shared_origin ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_object](#).

#### 7.89.4.17 `operator==( )`

```
bool hocon::simple_config_object::operator== (
    config_value const & other ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.89.4.18 `operator[]()`

```
shared_value hocon::simple_config_object::operator[] (
    std::string const & key ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 23 of file [simple\\_config\\_object.hpp](#).

**7.89.4.19 origin()**

```
virtual shared_origin const & hocon::config_value::origin ( ) const [virtual], [inherited]
```

The origin of the value (file, line number, etc.), for debugging and error messages.

**Returns**

where the value came from

**7.89.4.20 relativized()**

```
virtual shared_value hocon::config_value::relativized (
    std::string prefix ) const [inline], [virtual], [inherited]
```

This is used when including one file in another; the included file is relativized to the path it's included into in the parent file.

The point is that if you include a file at foo.bar in the parent, and the included file as a substitution \${a.b.c}, the included substitution now needs to be \${foo.bar.a.b.c} because we resolve substitutions globally only after parsing everything.

**Parameters**

<i>prefix</i>	
---------------	--

**Returns**

value relativized to the given path or the same value if nothing to do

Reimplemented in [hocon::simple\\_config\\_list](#), and [hocon::config\\_concatenation](#).

Definition at line 181 of file [config\\_value.hpp](#).

**7.89.4.21 render() [1/3]**

```
virtual std::string hocon::config_value::render ( ) const [virtual], [inherited]
```

Renders the config value as a HOCON string.

This method is primarily intended for debugging, so it tries to add helpful comments and whitespace.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

This method is equivalent to `render(config_render_options())`.

**Returns**

the rendered value

**7.89.4.22 render()** [2/3]

```
virtual std::string hocon::config_value::render (
    config_render_options options ) const [virtual], [inherited]
```

Renders the config value to a string, using the provided options.

If the config value has not been resolved (see [config#resolve](#)), it's possible that it can't be rendered as valid HOCON. In that case the rendering should still be useful for debugging but you might not be able to parse it. If the value has been resolved, it will always be parseable.

If the config value has been resolved and the options disable all HOCON-specific features (such as comments), the rendering will be valid JSON. If you enable HOCON-only features such as comments, the rendering will not be valid JSON.

**Parameters**

<i>options</i>	the rendering options
----------------	-----------------------

**Returns**

the rendered value

**7.89.4.23 render()** [3/3]

```
void hocon::simple_config_object::render (
    std::string & s,
    int indent,
    bool at_root,
    config_render_options options ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.89.4.24 replace\_child()**

```
shared_value hocon::simple_config_object::replace_child (
    shared_value const & child,
    shared_value replacement ) const [override], [virtual]
```

Replace a child of this value.

CAUTION if replacement is null, delete the child, which may also delete the parent, or make the parent into a non-container.

Implements [hocon::container](#).

#### 7.89.4.25 resolve\_substitutions()

```
resolve_result< shared_value > hocon::simple_config_object::resolve_substitutions (
    resolve_context const & context,
    resolve_source const & source ) const [override], [protected], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

#### 7.89.4.26 size()

```
size_t hocon::simple_config_object::size ( ) const [inline], [override], [virtual]
```

Implements [hocon::config\\_object](#).

Definition at line 22 of file [simple\\_config\\_object.hpp](#).

#### 7.89.4.27 to\_config()

```
virtual std::shared_ptr< const config > hocon::config_object::to_config ( ) const [virtual],
[inherited]
```

Converts this object to a `Config` instance, enabling you to use path expressions to find values in the object.

This is a constant-time operation (it is not proportional to the size of the object).

##### Returns

a `Config` with this object as its root

#### 7.89.4.28 to\_fallback\_value()

```
shared_value hocon::config_value::to_fallback_value ( ) const [override], [protected], [virtual],
[inherited]
```

Converts a config to its root object and a [config\\_value](#) to itself.

Originally in the `MergeableValue` interface, squashing to ease C++ public API separation

Implements [hocon::config\\_mergeable](#).

#### 7.89.4.29 type\_name()

```
static char const * hocon::config_value::type_name (
    type t ) [inline], [static], [inherited]
```

Definition at line 59 of file [config\\_value.hpp](#).

#### 7.89.4.30 unwrapped()

```
unwrapped_value hocon::simple_config_object::unwrapped ( ) const [override], [virtual]
```

Implements [hocon::config\\_value](#).

#### 7.89.4.31 value\_set()

```
std::vector< shared_value > hocon::simple_config_object::value_set (
    std::unordered_map< std::string, shared_value > m ) const
```

Construct a list of the values from the provided map.

Equivalent to Java's `Collection.values()` method.

#### 7.89.4.32 value\_type()

```
config_value::type hocon::config_object::value_type ( ) const [override], [virtual], [inherited]
```

The type of the value; matches the JSON type schema.

##### Returns

value's type

Implements [hocon::config\\_value](#).

#### 7.89.4.33 value\_type\_name()

```
char const * hocon::config_value::value_type_name ( ) const [inline], [inherited]
```

The printable name of the value type.

##### Returns

value's type's name

Definition at line 92 of file [config\\_value.hpp](#).



#### 7.89.4.34 with\_fallback()

```
std::shared_ptr< const config_mergeable > hocon::config_value::with_fallback (
    std::shared_ptr< const config_mergeable > other ) const [override], [virtual],
[inherited]
```

Returns a new value computed by merging this value with another, with keys in this value "winning" over the other one.

This associative operation may be used to combine configurations from multiple sources (such as multiple configuration files).

The semantics of merging are described in the [spec for HOCON](#). Merging typically occurs when either the same object is created twice in the same file, or two config files are both loaded. For example:

```
foo = { a: 42 }
foo = { b: 43 }
```

Here, the two objects are merged as if you had written:

```
foo = { a: 42, b: 43 }
```

Only `ConfigObject` and `Config` instances do anything in this method (they need to merge the fallback keys into themselves). All other values just return the original value, since they automatically override any fallback. This means that objects do not merge "across" non-objects; if you write `object.withFallback(nonObject).withFallback(otherObject)`, then `otherObject` will simply be ignored. This is an intentional part of how merging works, because non-objects such as strings and integers replace (rather than merging with) any prior value:

```
foo = { a: 42 }
foo = 10
```

Here, the number 10 "wins" and the value of `foo` would be simply 10. Again, for details see the spec.

##### Parameters

<i>other</i>	an object whose keys should be used as fallbacks, if the keys are not present in this one
--------------	-------------------------------------------------------------------------------------------

##### Returns

a new object (or the original one, if the fallback doesn't get used)

Implements [hocon::config\\_mergeable](#).

#### 7.89.4.35 with\_fallbacks\_ignored()

```
shared_value hocon::simple_config_object::with_fallbacks_ignored ( ) const [override], [virtual]
```

Reimplemented from [hocon::config\\_value](#).

**7.89.4.36 with\_only\_path()**

```
shared_object hocon::simple_config_object::with_only_path (
    path raw_path ) const [override], [virtual]
```

Implements [hocon::config\\_object](#).

**7.89.4.37 with\_only\_path\_or\_null()**

```
shared_object hocon::simple_config_object::with_only_path_or_null (
    path raw_path ) const [override], [virtual]
```

Gets the object with only the path if the path exists, otherwise null if it doesn't.

this ensures that if we have { a : { b : 42 } } and do withOnlyPath("a.b.c") that we don't keep an empty "a" object.

Implements [hocon::config\\_object](#).

**7.89.4.38 with\_origin()**

```
virtual shared_value hocon::config_value::with_origin (
    shared_origin origin ) const [virtual], [inherited]
```

Returns a `config_value` based on this one, but with the given origin.

This is useful when you are parsing a new format of file or setting comments for a single [config\\_value](#).

**Parameters**

<i>origin</i>	the origin set on the returned value
---------------	--------------------------------------

**Returns**

the new [config\\_value](#) with the given origin

**7.89.4.39 with\_value()** [1/2]

```
shared_object hocon::simple_config_object::with_value (
    path raw_path,
    shared_value value ) const [override], [virtual]
```

Implements [hocon::config\\_object](#).

## 7.89.4.40 with\_value() [2/2]

```
shared_object hocon::simple_config_object::with_value (
    std::string key,
    shared_value value ) const [override], [virtual]
```

Implements [hocon::config\\_object](#).

## 7.89.4.41 without\_path()

```
shared_object hocon::simple_config_object::without_path (
    path raw_path ) const [override], [virtual]
```


Implements [hocon::config\\_object](#).

The documentation for this class was generated from the following file:

- internal/values/simple\_config\_object.hpp

## 7.90 hocon::simple\_config\_origin Class Reference

Inheritance diagram for hocon::simple\_config\_origin:



## Public Member Functions

- **simple\_config\_origin** (std::string [description](#), int [line\\_number](#), int end\_line\_number, origin\_type org\_type, std::string resource\_or\_null, std::vector< std::string > comments\_or\_null)
- **simple\_config\_origin** (std::string [description](#), int [line\\_number](#)=-1, int end\_line\_number=-1, origin\_type org\_type=origin\_type::GENERIC)  
*This constructor replaces the new\_simple method in the original library.*
- int [line\\_number](#) () const override  
*Returns a line number where the value or exception originated.*
- std::string const & [description](#) () const override  
*Returns a string describing the origin of a value or exception.*
- std::vector< std::string > const & [comments](#) () const override  
*Returns any comments that appeared to "go with" this place in the file.*
- shared\_origin [with\\_line\\_number](#) (int [line\\_number](#)) const override  
*Returns a pointer to a copy of this origin with the specified line number as both starting and ending line.*
- shared\_origin [with\\_comments](#) (std::vector< std::string > [comments](#)) const override  
*Returns a config\_origin based on this one, but with the given comments.*
- std::shared\_ptr< const [simple\\_config\\_origin](#) > **append\_comments** (std::vector< std::string > [comments](#)) const
- std::shared\_ptr< const [simple\\_config\\_origin](#) > **prepend\_comments** (std::vector< std::string > [comments](#)) const
- bool **operator==** (const [simple\\_config\\_origin](#) &other) const
- bool **operator!=** (const [simple\\_config\\_origin](#) &other) const

## Static Public Member Functions

- static shared\_origin **merge\_origins** (shared\_origin a, shared\_origin b)
- static shared\_origin **merge\_origins** (std::vector< shared\_value > const &stack)
- static shared\_origin **merge\_origins** (std::vector< shared\_origin > const &stack)

### 7.90.1 Detailed Description

Definition at line 13 of file [simple\\_config\\_origin.hpp](#).

### 7.90.2 Constructor & Destructor Documentation

#### 7.90.2.1 simple\_config\_origin()

```
hocon::simple_config_origin::simple_config_origin (
    std::string description,
    int line_number = -1,
    int end_line_number = -1,
    origin_type org_type = origin_type::GENERIC )
```

This constructor replaces the new\_simple method in the original library.

### 7.90.3 Member Function Documentation

#### 7.90.3.1 comments()

```
std::vector< std::string > const & hocon::simple_config_origin::comments ( ) const [override],
[virtual]
```

Returns any comments that appeared to "go with" this place in the file.

Often an empty list, but never null. The details of this are subject to change, but at the moment comments that are immediately before an array element or object field, with no blank line after the comment, "go with" that element or field.

#### Returns

any comments that seemed to "go with" this origin, empty list if none

Implements [hocon::config\\_origin](#).

### 7.90.3.2 description()

```
std::string const & hocon::simple_config_origin::description ( ) const [override], [virtual]
```

Returns a string describing the origin of a value or exception.

This will never return null.

#### Returns

string describing the origin

Implements [hocon::config\\_origin](#).

### 7.90.3.3 line\_number()

```
int hocon::simple_config_origin::line_number ( ) const [override], [virtual]
```

Returns a line number where the value or exception originated.

This will return -1 if there's no meaningful line number.

#### Returns

line number or -1 if none is available

Implements [hocon::config\\_origin](#).

### 7.90.3.4 with\_comments()

```
shared_origin hocon::simple_config_origin::with_comments (
    std::vector< std::string > comments ) const [override], [virtual]
```

Returns a `config_origin` based on this one, but with the given comments.

Does not modify this instance or any `config_values` with this origin (since they are immutable). To set the returned origin to a `config_value`, use [config\\_value#with\\_origin](#).

Note that when the given comments are equal to the comments on this object, a new instance may not be created and `this` is returned directly.

#### Since

1.3.0

## Parameters

<i>comments</i>	the comments used on the returned origin
-----------------	------------------------------------------

## Returns

the [config\\_origin](#) with the given comments

Implements [hocon::config\\_origin](#).

### 7.90.3.5 with\_line\_number()

```
shared_origin hocon::simple_config_origin::with_line_number (
    int line_number ) const [override], [virtual]
```

Returns a pointer to a copy of this origin with the specified line number as both starting and ending line.


Implements [hocon::config\\_origin](#).

The documentation for this class was generated from the following file:

- internal/simple\_config\_origin.hpp

## 7.91 hocon::simple\_include\_context Class Reference

Inheritance diagram for [hocon::simple\\_include\\_context](#):



### Public Member Functions

- **simple\_include\_context** ([parseable](#) const &[parseable](#))
- shared\_parseable [relative\\_to](#) (std::string file\_name) const override  
*Tries to find a name relative to whatever is doing the including, for example in the same directory as the file doing the including.*
- [config\\_parse\\_options](#) [parse\\_options](#) () const override  
*Parse options to use (if you use another method to get a [config\\_parseable](#) then use [config\\_parseable#options\(\)](#) instead though).*
- void [set\\_cur\\_dir](#) (std::string dir) const
- std::string [get\\_cur\\_dir](#) () const

## Protected Attributes

- `std::shared_ptr< std::string > _cur_dir`

### 7.91.1 Detailed Description

Definition at line 8 of file [simple\\_include\\_context.hpp](#).

### 7.91.2 Member Function Documentation

#### 7.91.2.1 `get_cur_dir()`

```
std::string hocon::config_include_context::get_cur_dir ( ) const [inline], [inherited]
```

Definition at line 55 of file [config\\_include\\_context.hpp](#).

#### 7.91.2.2 `parse_options()`

```
config_parse_options hocon::simple_include_context::parse_options ( ) const [override], [virtual]
```

Parse options to use (if you use another method to get a [config\\_parseable](#) then use [config\\_parseable#options\(\)](#) instead though).

##### Returns

the parse options

Implements [hocon::config\\_include\\_context](#).

#### 7.91.2.3 `relative_to()`

```
shared_parseable hocon::simple_include_context::relative_to (
    std::string file_name ) const [override], [virtual]
```

Tries to find a name relative to whatever is doing the including, for example in the same directory as the file doing the including.

Returns null if it can't meaningfully create a relative name. The returned parseable may not exist; this function is not required to do any IO, just compute what the name would be.

The passed-in filename has to be a complete name (with extension), not just a basename. (Include statements in config files are allowed to give just a basename.)

## Parameters

<i>filename</i>	the name to make relative to the resource doing the including
-----------------	---------------------------------------------------------------

## Returns

parseable item relative to the resource doing the including, or null

Implements [hocon::config\\_include\\_context](#).

### 7.91.2.4 set\_cur\_dir()

```
void hocon::config_include_context::set_cur_dir (
    std::string dir ) const [inline], [inherited]
```

Definition at line 51 of file [config\\_include\\_context.hpp](#).

## 7.91.3 Member Data Documentation

### 7.91.3.1 \_cur\_dir

```
std::shared_ptr<std::string> hocon::config_include_context::_cur_dir [protected], [inherited]
```


Definition at line 60 of file [config\\_include\\_context.hpp](#).

The documentation for this class was generated from the following file:

- [internal/simple\\_include\\_context.hpp](#)

## 7.92 hocon::simple\_includer Class Reference

Inheritance diagram for `hocon::simple_includer`:





## Public Member Functions

- **simple\_includer** (shared\_includer fallback)
- shared\_includer [with\\_fallback](#) (shared\_includer fallback) const override  
*Returns a new includer that falls back to the given includer.*
- shared\_object [include](#) (shared\_include\_context context, std::string what) const override  
*Parses another item to be included.*
- shared\_object **include\_without\_fallback** (shared\_include\_context context, std::string what) const
- shared\_object [include\\_file](#) (shared\_include\_context context, std::string what) const override  
*Parses another item to be included.*

## Static Public Member Functions

- static shared\_object **include\_file\_without\_fallback** (shared\_include\_context context, std::string what)
- static [config\\_parse\\_options](#) **clear\_for\_include** ([config\\_parse\\_options](#) const &options)
- static shared\_object **from\_basename** (std::shared\_ptr< [name\\_source](#) > source, std::string name, [config\\_parse\\_options](#) options)
- static std::shared\_ptr< const [full\\_includer](#) > **make\_full** (std::shared\_ptr< const [config\\_includer](#) > includer)

### 7.92.1 Detailed Description

Definition at line 12 of file [simple\\_includer.hpp](#).

### 7.92.2 Member Function Documentation

#### 7.92.2.1 include()

```
shared_object hocon::simple_includer::include (
    shared_include_context context,
    std::string what ) const [override], [virtual]
```

Parses another item to be included.

The returned object typically would not have substitutions resolved. You can throw a [config\\_exception](#) here to abort parsing, or return an empty object, but may not return null.

This method is used for a "heuristic" include statement that does not specify file, or URL resource. If the include statement does specify, then the same class implementing [config\\_includer](#) must also implement [config\\_includer\\_file](#) or [config\\_includer\\_URL](#) as needed, or a default includer will be used.

#### Parameters

<i>context</i>	some info about the include context
<i>what</i>	the include statement's argument

**Returns**

a non-null [config\\_object](#)

Implements [hocon::config\\_includer](#).

**7.92.2.2 include\_file()**

```
shared_object hocon::simple_includer::include_file (
    shared_include_context context,
    std::string what ) const [override], [virtual]
```

Parses another item to be included.

The returned object typically would not have substitutions resolved. You can throw a [config\\_exception](#) here to abort parsing, or return an empty object, but may not return null.

**Parameters**

<i>context</i>	some info about the include context
<i>what</i>	the include statement's argument (a file path)

**Returns**

a non-null [config\\_object](#)

Implements [hocon::config\\_includer\\_file](#).

**7.92.2.3 with\_fallback()**

```
shared_includer hocon::simple_includer::with_fallback (
    shared_includer fallback ) const [override], [virtual]
```

Returns a new includer that falls back to the given includer.

This is how you can obtain the default includer; it will be provided as a fallback. It's up to your includer to chain to it if you want to. You might want to merge any files found by the fallback includer with any objects you load yourself.

It's important to handle the case where you already have the fallback with a "return this", i.e. this method should not create a new object if the fallback is the same one you already have. The same fallback may be added repeatedly.

**Parameters**

<i>fallback</i>	the previous includer for chaining
-----------------	------------------------------------

**Returns**

a new includer


Implements [hocon::config\\_includer](#).

The documentation for this class was generated from the following file:

- `internal/simple_includer.hpp`

## 7.93 hocon::single\_token\_iterator Class Reference

Inheritance diagram for `hocon::single_token_iterator`:



### Public Member Functions

- **single\_token\_iterator** (shared\_token [token](#))
- bool [has\\_next](#) () override
- shared\_token [next](#) () override

### 7.93.1 Detailed Description

Definition at line [119](#) of file [tokenizer.hpp](#).

### 7.93.2 Member Function Documentation

#### 7.93.2.1 has\_next()

```
bool hocon::single_token_iterator::has_next ( ) [override], [virtual]
```

Implements [hocon::iterator](#).

### 7.93.2.2 next()

```
shared_token hocon::single_token_iterator::next ( ) [override], [virtual]
```


Implements [hocon::iterator](#).

The documentation for this class was generated from the following file:

- internal/tokenizer.hpp

## 7.94 hocon::substitution Class Reference

Inheritance diagram for hocon::substitution:



### Public Member Functions

- **substitution** (shared\_origin origin, bool optional, token\_list expression)
- bool **optional** () const
- token\_list const & **expression** () const
- std::string **token\_text** () const override
- std::string **to\_string** () const override
- bool **operator==** (const [token](#) &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const

### 7.94.1 Detailed Description

Definition at line 96 of file [tokens.hpp](#).

### 7.94.2 Member Function Documentation

#### 7.94.2.1 operator==( )

```
bool hocon::substitution::operator== (
    const token & other ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

### 7.94.2.2 to\_string()

```
std::string hocon::substitution::to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

### 7.94.2.3 token\_text()

```
std::string hocon::substitution::token_text ( ) const [override], [virtual]
```


Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:

- internal/tokens.hpp

## 7.95 hocon::substitution\_expression Class Reference

Inheritance diagram for hocon::substitution\_expression:



### Public Member Functions

- **substitution\_expression** ([path](#) the\_path, bool optional)
- [path](#) **get\_path** () const
- bool **optional** () const
- std::shared\_ptr< [substitution\\_expression](#) > **change\_path** ([path](#) new\_path)
- std::string **to\_string** () const
- bool **operator==** ([substitution\\_expression](#) const &other) const

### 7.95.1 Detailed Description


Definition at line 9 of file [substitution\\_expression.hpp](#).

The documentation for this class was generated from the following file:

- internal/substitution\_expression.hpp

## 7.96 hocon::token Class Reference

Inheritance diagram for hocon::token:



### Public Member Functions

- **token** (token\_type type, shared\_origin origin=nullptr, std::string token\_text="", std::string debug\_string="")
- virtual token\_type **get\_token\_type** () const
- virtual std::string **token\_text** () const
- virtual std::string **to\_string** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const
- virtual bool **operator==** (const token &other) const

### 7.96.1 Detailed Description


Definition at line 18 of file [token.hpp](#).

The documentation for this class was generated from the following file:

- internal/token.hpp

## 7.97 hocon::token\_iterator Class Reference

Inheritance diagram for hocon::token\_iterator:



### Public Member Functions

- **token\_iterator** (shared\_origin origin, std::unique\_ptr< std::istream > input, bool allow\_comments)
- **token\_iterator** (shared\_origin origin, std::unique\_ptr< std::istream > input, config\_syntax flavor)
- bool **has\_next** () override
- shared\_token **next** () override

### Static Public Member Functions

- static std::string **render** (token\_list tokens)

### 7.97.1 Detailed Description

Definition at line 49 of file [tokenizer.hpp](#).

### 7.97.2 Member Function Documentation

#### 7.97.2.1 has\_next()

```
bool hocon::token_iterator::has_next ( ) [override], [virtual]
```

Implements [hocon::iterator](#).

#### 7.97.2.2 next()

```
shared_token hocon::token_iterator::next ( ) [override], [virtual]
```


Implements [hocon::iterator](#).

The documentation for this class was generated from the following file:

- internal/tokenizer.hpp

## 7.98 hocon::token\_list\_iterator Class Reference

Inheritance diagram for hocon::token\_list\_iterator:



### Public Member Functions

- **token\_list\_iterator** (token\_list [tokens](#))
- bool [has\\_next](#) () override
- shared\_token [next](#) () override

### 7.98.1 Detailed Description

Definition at line 131 of file [tokenizer.hpp](#).

## 7.98.2 Member Function Documentation

### 7.98.2.1 has\_next()

```
bool hocon::token_list_iterator::has_next ( ) [override], [virtual]
```

Implements [hocon::iterator](#).

### 7.98.2.2 next()

```
shared_token hocon::token_list_iterator::next ( ) [override], [virtual]
```

Implements [hocon::iterator](#).

The documentation for this class was generated from the following file:

- [internal/tokenizer.hpp](#)

## 7.99 hocon::tokens Class Reference

### Static Public Member Functions

- static shared\_token const & [start\\_token](#) ()  
*Singleton tokens.*
- static shared\_token const & [end\\_token](#) ()
- static shared\_token const & [comma\\_token](#) ()
- static shared\_token const & [equals\\_token](#) ()
- static shared\_token const & [colon\\_token](#) ()
- static shared\_token const & [open\\_curly\\_token](#) ()
- static shared\_token const & [close\\_curly\\_token](#) ()
- static shared\_token const & [open\\_square\\_token](#) ()
- static shared\_token const & [close\\_square\\_token](#) ()
- static shared\_token const & [plus\\_equals\\_token](#) ()
- static bool [is\\_newline](#) (shared\_token)
- static bool [is\\_ignored\\_whitespace](#) (shared\_token)
- static bool [is\\_value\\_with\\_type](#) (shared\_token t, [config\\_value::type](#) type)
- static shared\_value [get\\_value](#) (shared\_token t)

### 7.99.1 Detailed Description

Definition at line [113](#) of file [tokens.hpp](#).



## 7.99.2 Member Function Documentation

### 7.99.2.1 start\_token()

```
static shared_token const & hocon::tokens::start_token ( ) [static]
```

Singleton tokens.

The documentation for this class was generated from the following file:


- internal/tokens.hpp

## 7.100 hocon::unmergeable Class Reference

Interface that tags a ConfigValue that is not mergeable until after substitutions are resolved.

```
#include <unmergeable.hpp>
```

Inheritance diagram for hocon::unmergeable:



### Public Member Functions

- virtual std::vector< shared\_value > **unmerged\_values** () const =0

### 7.100.1 Detailed Description

Interface that tags a ConfigValue that is not mergeable until after substitutions are resolved.

Basically these are special ConfigValue that never appear in a resolved tree, like ConfigSubstitution and ConfigDelayedMerge.


Definition at line 14 of file [unmergeable.hpp](#).

The documentation for this class was generated from the following file:

- internal/unmergeable.hpp

## 7.101 hocon::unquoted\_text Class Reference

Inheritance diagram for hocon::unquoted\_text:



### Public Member Functions

- **unquoted\_text** (shared\_origin origin, std::string text)
- std::string **to\_string** () const override
- bool **operator==** (const **token** &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual std::string **token\_text** () const
- virtual shared\_origin const & **origin** () const
- int **line\_number** () const

### 7.101.1 Detailed Description

Definition at line 33 of file [tokens.hpp](#).

### 7.101.2 Member Function Documentation

#### 7.101.2.1 operator==( )

```
bool hocon::unquoted_text::operator== (
    const token & other ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

#### 7.101.2.2 to\_string( )

```
std::string hocon::unquoted_text::to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:


- internal/tokens.hpp

## 7.102 hocon::unresolved\_substitution\_exception Struct Reference

Exception indicating that a substitution did not resolve to anything.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::unresolved\_substitution\_exception:

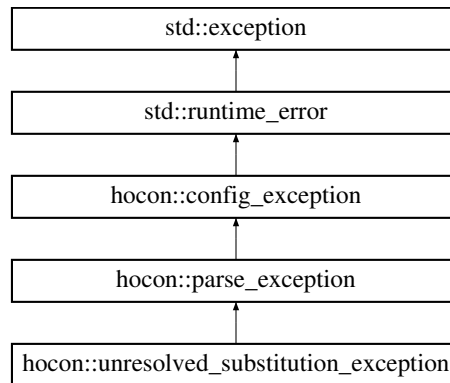

### Public Member Functions

- [unresolved\\_substitution\\_exception](#) ([config\\_origin](#) const &origin, std::string const &detail)

#### 7.102.1 Detailed Description

Exception indicating that a substitution did not resolve to anything.

Thrown by [config#resolve](#).

Definition at line 110 of file [config\\_exception.hpp](#).

#### 7.102.2 Constructor & Destructor Documentation

##### 7.102.2.1 unresolved\_substitution\_exception()

```
hocon::unresolved_substitution_exception::unresolved_substitution_exception (
    config\_origin const & origin,
    std::string const & detail ) [inline]
```


Definition at line 111 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)

## 7.103 hocon::unsupported\_exception Struct Reference

Inheritance diagram for hocon::unsupported\_exception:

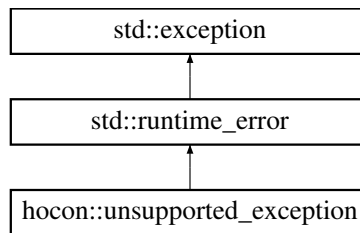

### Public Member Functions

- **unsupported\_exception** (std::string const &message)

### 7.103.1 Detailed Description

Definition at line 14 of file [token.hpp](#).

The documentation for this struct was generated from the following file:


- internal/token.hpp

## 7.104 hocon::validation\_failed\_exception Struct Reference

Exception indicating that [config#check\\_valid](#) found validity problems.

```
#include <config_exception.hpp>
```

Inheritance diagram for hocon::validation\_failed\_exception:

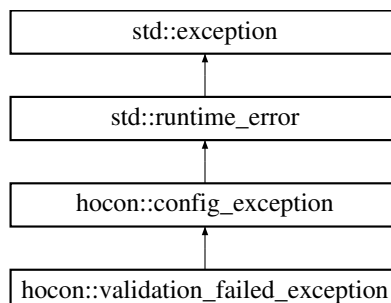

### Public Member Functions

- **validation\_failed\_exception** (std::vector< [validation\\_problem](#) > problems\_)

## Public Attributes

- `const std::vector< validation\_problem > problems`

### 7.104.1 Detailed Description

Exception indicating that `config#check_valid` found validity problems.

The problems are available via the `problems()` method. The `get_message()` of this exception is a potentially very long string listing all the problems found.

Definition at line 155 of file `config_exception.hpp`.

### 7.104.2 Constructor & Destructor Documentation

#### 7.104.2.1 `validation_failed_exception()`

```
hocon::validation_failed_exception::validation_failed_exception (  
    std::vector< validation\_problem > problems_ ) [inline]
```

Definition at line 156 of file `config_exception.hpp`.

### 7.104.3 Member Data Documentation

#### 7.104.3.1 `problems`

```
const std::vector<validation\_problem> hocon::validation_failed_exception::problems
```

Definition at line 159 of file `config_exception.hpp`.

The documentation for this struct was generated from the following file:

- `hocon/config_exception.hpp`

## 7.105 hocon::validation\_problem Struct Reference

Information about a problem that occurred in `config#check_valid`.

```
#include <config_exception.hpp>
```

## Public Member Functions

- [validation\\_problem](#) (std::string path\_, shared\_origin origin\_, std::string problem\_)
- std::string [to\\_string](#) ()

## Public Attributes

- const std::string [path](#)
- const shared\_origin [origin](#)
- const std::string [problem](#)

### 7.105.1 Detailed Description

Information about a problem that occurred in [config#check\\_valid](#).

A [validation\\_failed\\_exception](#) thrown from `check_valid()` includes a list of problems encountered.

Definition at line [136](#) of file [config\\_exception.hpp](#).

### 7.105.2 Constructor & Destructor Documentation

#### 7.105.2.1 validation\_problem()

```
hocon::validation_problem::validation_problem (
    std::string path_,
    shared_origin origin_,
    std::string problem_ ) [inline]
```

Definition at line [137](#) of file [config\\_exception.hpp](#).

### 7.105.3 Member Function Documentation

#### 7.105.3.1 to\_string()

```
std::string hocon::validation_problem::to_string ( ) [inline]
```

Definition at line [144](#) of file [config\\_exception.hpp](#).

### 7.105.4 Member Data Documentation

#### 7.105.4.1 origin

```
const shared_origin hocon::validation_problem::origin
```

Definition at line 141 of file [config\\_exception.hpp](#).

#### 7.105.4.2 path

```
const std::string hocon::validation_problem::path
```

Definition at line 140 of file [config\\_exception.hpp](#).

#### 7.105.4.3 problem

```
const std::string hocon::validation_problem::problem
```


Definition at line 142 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- [hocon/config\\_exception.hpp](#)

## 7.106 hocon::value Class Reference

Inheritance diagram for hocon::value:



### Public Member Functions

- **value** (shared\_value [value](#))
- **value** (shared\_value [value](#), std::string original\_text)
- std::string [to\\_string](#) () const override
- shared\_origin const & [origin](#) () const override
- shared\_value **get\_value** () const
- bool [operator==](#) (const [token](#) &other) const override
- virtual token\_type **get\_token\_type** () const
- virtual std::string **token\_text** () const
- int **line\_number** () const

### 7.106.1 Detailed Description

Definition at line 8 of file [tokens.hpp](#).

### 7.106.2 Member Function Documentation

#### 7.106.2.1 operator==( )

```
bool hocon::value::operator==(
    const token & other ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

#### 7.106.2.2 origin( )

```
shared_origin const & hocon::value::origin ( ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

#### 7.106.2.3 to\_string( )

```
std::string hocon::value::to_string ( ) const [override], [virtual]
```

Reimplemented from [hocon::token](#).

The documentation for this class was generated from the following file:


- [internal/tokens.hpp](#)

## 7.107 hocon::wrong\_type\_exception Struct Reference

Exception indicating that the type of a value does not match the type you requested.

```
#include <config_exception.hpp>
```

Inheritance diagram for `hocon::wrong_type_exception`:





## Public Member Functions

- [wrong\\_type\\_exception](#) ([config\\_origin](#) const &origin, std::string const &[path](#), std::string const &expected, std::string const &actual)
- [config\\_exception](#) ([config\\_origin](#) const &origin, std::string const &message)
- [config\\_exception](#) (std::string const &message)
- [config\\_exception](#) (std::string const &message, std::exception const &e)

### 7.107.1 Detailed Description

Exception indicating that the type of a value does not match the type you requested.

Definition at line 27 of file [config\\_exception.hpp](#).

### 7.107.2 Constructor & Destructor Documentation

#### 7.107.2.1 wrong\_type\_exception()

```
hocon::wrong_type_exception::wrong_type_exception (
    config\_origin const & origin,
    std::string const & path,
    std::string const & expected,
    std::string const & actual ) [inline]
```

Definition at line 28 of file [config\\_exception.hpp](#).

### 7.107.3 Member Function Documentation

#### 7.107.3.1 config\_exception() [1/3]

```
hocon::config_exception::config_exception (
    config\_origin const & origin,
    std::string const & message ) [inline]
```

Definition at line 15 of file [config\\_exception.hpp](#).

#### 7.107.3.2 config\_exception() [2/3]

```
hocon::config_exception::config_exception (
    std::string const & message ) [inline]
```

Definition at line 17 of file [config\\_exception.hpp](#).

### 7.107.3.3 `config_exception()` [3/3]

```
hocon::config_exception::config_exception (
    std::string const & message,
    std::exception const & e ) [inline]
```

Definition at line 19 of file [config\\_exception.hpp](#).

The documentation for this struct was generated from the following file:

- `hocon/config_exception.hpp`

## Chapter 8

# File Documentation

### 8.1 config.hpp

```
00001 #pragma once
00002
00003 #include "types.hpp"
00004 #include "config_mergeable.hpp"
00005 #include "config_origin.hpp"
00006 #include "config_object.hpp"
00007 #include "config_resolve_options.hpp"
00008 #include "config_value.hpp"
00009 #include "config_list.hpp"
00010 #include "config_exception.hpp"
00011 #include "path.hpp"
00012 #include <vector>
00013 #include <string>
00014 #include <set>
00015 #include "export.h"
00016 #include <leatherman/locale/locale.hpp>
00017
00018 namespace hocon {
00019
00020     enum class time_unit { NANoseconds, MICROseconds, MILLIseconds, SECONDS, MINUTES, HOURS, DAYS };
00021
00022     class LIBCPP_HOCON_EXPORT config : public config_mergeable, public
00023     std::enable_shared_from_this<config> {
00024     friend class config_object;
00025     friend class config_value;
00026     friend class config_parseable;
00027     friend class parseable;
00028
00029     public:
00030     static shared_config parse_file_any_syntax(std::string file_basename, config_parse_options
00031 options);
00032
00033     static shared_config parse_file_any_syntax(std::string file_basename);
00034
00035     static shared_config parse_string(std::string s, config_parse_options options);
00036
00037     static shared_config parse_string(std::string s);
00038
00039     virtual shared_object root() const;
00040
00041     virtual shared_origin origin() const;
00042
00043     std::shared_ptr<const config_mergeable> with_fallback(std::shared_ptr<const config_mergeable>
00044 other) const override;
00045
00046     shared_value to_fallback_value() const override;
00047
00048     virtual shared_config resolve() const;
00049
00050     virtual shared_config resolve(config_resolve_options options) const;
00051
00052     virtual bool is_resolved() const;
00053
00054     virtual shared_config resolve_with(shared_config source) const;
00055
00056     virtual shared_config resolve_with(shared_config source, config_resolve_options options)
00057 const;
00058
00059 }
```

```

00448     virtual void check_valid(shared_config reference, std::vector<std::string> restrict_to_paths)
00449     const;
00471     virtual bool has_path(std::string const& path) const;
00472
00510     virtual bool has_path_or_null(std::string const& path) const;
00511
00518     virtual bool is_empty() const;
00519
00542     virtual std::set<std::pair<std::string, std::shared_ptr<const config_value>> entry_set()
00543     const;
00543
00565     virtual bool get_is_null(std::string const& path) const;
00566
00567     virtual bool get_bool(std::string const& path) const;
00568     virtual int get_int(std::string const& path) const;
00569     virtual int64_t get_long(std::string const& path) const;
00570     virtual double get_double(std::string const& path) const;
00571     virtual std::string get_string(std::string const& path) const;
00572     virtual std::shared_ptr<const config_object> get_object(std::string const& path) const;
00573     virtual shared_config get_config(std::string const& path) const;
00574     virtual unwrapped_value get_any_ref(std::string const& path) const;
00575     virtual std::shared_ptr<const config_value> get_value(std::string const& path) const;
00576
00577     template<typename T>
00578     std::vector<T> get_homogeneous_unwrapped_list(std::string const& path) const {
00579         auto list = boost::get<std::vector<unwrapped_value>(get_list(path)->unwrapped());
00580         std::vector<T> T_list;
00581         for (auto item : list) {
00582             try {
00583                 T_list.push_back(boost::get<T>(item));
00584             } catch (boost::bad_get &ex) {
00585                 throw config_exception(leatherman::locale::format("The list did not contain only
the desired type.));
00586             }
00587         }
00588         return T_list;
00589     }
00590
00591     virtual shared_list get_list(std::string const& path) const;
00592     virtual std::vector<bool> get_bool_list(std::string const& path) const;
00593     virtual std::vector<int> get_int_list(std::string const& path) const;
00594     virtual std::vector<int64_t> get_long_list(std::string const& path) const;
00595     virtual std::vector<double> get_double_list(std::string const& path) const;
00596     virtual std::vector<std::string> get_string_list(std::string const& path) const;
00597     virtual std::vector<shared_object> get_object_list(std::string const& path) const;
00598     virtual std::vector<shared_config> get_config_list(std::string const& path) const;
00599
00600     // TODO: memory parsing
00601
00610     virtual int64_t get_duration(std::string const& path, time_unit unit) const;
00611
00623     virtual shared_config with_only_path(std::string const& path) const;
00624
00635     virtual shared_config without_path(std::string const& path) const;
00636
00648     virtual shared_config at_path(std::string const& path) const;
00649
00660     virtual shared_config at_key(std::string const& key) const;
00661
00677     virtual shared_config with_value(std::string const& path, std::shared_ptr<const config_value>
value) const;
00678
00679     bool operator==(config const& other) const;
00680
00681     config(shared_object object);
00682
00683     static shared_object env_variables_as_config_object();
00684
00685     protected:
00686     shared_value find(std::string const& path_expression, config_value::type expected) const;
00687     shared_value find(path path_expression, config_value::type expected, path original_path)
const;
00688     shared_value find(path path_expression, config_value::type expected) const;
00689     shared_config at_key(shared_origin origin, std::string const& key) const;
00690
00691     static shared_includer default_includer();
00692
00693     // TODO: memory and duration parsing
00694
00695     private:
00706     static duration parse_duration(std::string input, shared_origin origin_for_exception,
std::string path_for_exception);
00707
00708     static duration convert(int64_t number, time_unit units);
00709     static duration convert(double number, time_unit units);
00710     static time_unit get_units(std::string const& unit_string);

```

```

00711         duration get_duration(std::string const& path) const;
00712
00713         shared_value has_path_peek(std::string const& path_expression) const;
00714         shared_value peek_path(path desired_path) const;
00715
00716         static void find_paths(std::set<std::pair<std::string, std::shared_ptr<const config_value>>&
entries,
00717                               path parent, shared_object obj);
00718         static shared_value throw_if_null(shared_value v, config_value::type expected, path
original_path);
00719         static shared_value find_key(shared_object self, std::string const& key,
00720                                     config_value::type expected, path original_path);
00721         static shared_value find_key_or_null(shared_object self, std::string const& key,
00722                                             config_value::type expected, path original_path);
00723         static shared_value find_or_null(shared_object self, path desired_path,
00724                                         config_value::type expected, path original_path);
00725         shared_value find_or_null(std::string const& path_expression, config_value::type expected)
const;
00726         shared_value find_or_null(path path_expression, config_value::type expected, path
original_path) const;
00727
00728         shared_object _object;
00729     };
00730
00731     template<>
00732     std::vector<int64_t> config::get_homogeneous_unwrapped_list(std::string const& path) const;
00733
00734 } // namespace hocon

```

## 8.2 config\_exception.hpp

```

00001 #pragma once
00002
00003 #include <stdexcept>
00004 #include <string>
00005 #include "config_origin.hpp"
00006 #include <leatherman/locale/locale.hpp>
00007
00008 namespace hocon {
00009
00014     struct config_exception : public std::runtime_error {
00015         config_exception(config_origin const& origin, std::string const& message) :
00016             runtime_error(leatherman::locale::format("{1}: {2}", origin.description(), message)) { }
00017
00018         config_exception(std::string const& message) : runtime_error(message) { }
00019
00020         config_exception(std::string const& message, std::exception const& e) :
00021             runtime_error(leatherman::locale::format("{1} {2}", message, e.what())) { }
00022
00023     };
00024
00027     struct wrong_type_exception : public config_exception {
00028         wrong_type_exception(config_origin const& origin,
00029                             std::string const& path, std::string const& expected, std::string const&
actual) :
00030             config_exception(origin, leatherman::locale::format("{1} has type {2} rather than
00031 {3}", path, actual, expected)) { }
00032         using config_exception::config_exception;
00033     };
00034
00038     struct missing_exception : public config_exception {
00039         missing_exception(std::string const& path) :
00040             config_exception(leatherman::locale::format("No configuration setting found for key
00041 '{1}'", path)) { }
00042         using config_exception::config_exception;
00043     };
00044
00048     struct null_exception : public missing_exception {
00049         null_exception(config_origin const& origin, std::string const& path, std::string const&
expected = "") :
00050             missing_exception(origin, (expected.empty() ?
00051 leatherman::locale::format("Configuration key \"{1}\" is null", path)
00052 : leatherman::locale::format("Configuration key \"{1}\" is
00053 set to null but expected {2}", path, expected))) { }
00054
00055     };
00056
00059     struct bad_value_exception : public config_exception {
00060         bad_value_exception(config_origin const& origin, std::string const& path, std::string const&
message) :
00061             config_exception(origin, leatherman::locale::format("Invalid value at '{1}': {2}",
00062 path, message)) { }
00063         bad_value_exception(std::string const& path, std::string const& message) :
00064             config_exception(leatherman::locale::format("Invalid value at '{1}': {2}", path,
00065 message)) { }
00066

```

```

00064     };
00065
00071     struct bad_path_exception : public config_exception {
00072         bad_path_exception(config_origin const& origin, std::string const& path, std::string const&
message) :
00073             config_exception(origin, path.empty() ? message : leatherman::locale::format("Invalid
path '{1}': {2}", path, message)) { }
00074         bad_path_exception(std::string const& path, std::string const& message) :
00075             config_exception(path.empty() ? message : leatherman::locale::format("Invalid path
'{1}': {2}", path, message)) { }
00076     };
00077
00085     struct bug_or_broken_exception : public config_exception {
00086         bug_or_broken_exception(std::string const& message) : config_exception(message) { }
00087     };
00088
00093     struct io_exception : public config_exception {
00094         io_exception(config_origin const& origin, std::string const& message) :
config_exception(origin, message) { }
00095     };
00096
00101     struct parse_exception : public config_exception {
00102         parse_exception(config_origin const& origin, std::string const& message) :
config_exception(origin, message) { }
00103     };
00104
00105
00110     struct unresolved_substitution_exception : public parse_exception {
00111         unresolved_substitution_exception(config_origin const& origin, std::string const& detail) :
00112             parse_exception(origin, leatherman::locale::format("Could not resolve substitution to a
value: {1}", detail)) { }
00113     };
00114
00123     struct not_resolved_exception : public bug_or_broken_exception {
00124         not_resolved_exception(std::string const& message) : bug_or_broken_exception(message) { }
00125     };
00126
00127     struct not_possible_to_resolve_exception : public bug_or_broken_exception {
00128         not_possible_to_resolve_exception(std::string const& message) :
bug_or_broken_exception(message) { }
00129     };
00130
00136     struct validation_problem {
00137         validation_problem(std::string path_, shared_origin origin_, std::string problem_) :
00138             path(std::move(path_)), origin(std::move(origin_)), problem(std::move(problem_)) { }
00139
00140         const std::string path;
00141         const shared_origin origin;
00142         const std::string problem;
00143
00144         std::string to_string() {
00145             return leatherman::locale::format("ValidationProblem({1},{2},{3})", path,
origin->description(), problem);
00146         }
00147     };
00148
00155     struct validation_failed_exception : public config_exception {
00156         validation_failed_exception(std::vector<validation_problem> problems_) :
00157             config_exception(make_message(problems_), problems(std::move(problems_)) { }
00158
00159         const std::vector<validation_problem> problems;
00160
00161     private:
00162         static std::string make_message(std::vector<validation_problem> const& problems_) {
00163             std::string msg;
00164             for (auto &p : problems_) {
00165                 auto sep = std::string(": ");
00166                 for (auto &s : {p.origin->description(), sep, p.path, sep, p.problem, std::string(",
")) {
00167                     msg.append(s);
00168                 }
00169             }
00170             if (msg.empty()) {
00171                 throw bug_or_broken_exception(leatherman::locale::format("validation_failed_exception
must have a non-empty list of problems"));
00172             }
00173             msg.resize(msg.length() - 2);
00174             return msg;
00175         }
00176     };
00177
00181     struct generic_exception : public config_exception {
00182         generic_exception(std::string const& message) : config_exception(message) { }
00183     };
00184 } // namespace hocon

```

## 8.3 config\_include\_context.hpp

```

00001 #pragma once
00002
00003 #include "types.hpp"
00004 #include "config_parse_options.hpp"
00005 #include "export.h"
00006
00007 namespace hocon {
00008
00021     class LIBCPP_HOCON_EXPORT config_include_context {
00022     public:
00023         config_include_context() : _cur_dir(new std::string("")) {}
00040         virtual shared_parseable relative_to(std::string file_name) const = 0;
00041
00049         virtual config_parse_options parse_options() const = 0;
00050
00051         void set_cur_dir(std::string dir) const {
00052             _cur_dir->assign(dir);
00053         }
00054
00055         std::string get_cur_dir() const {
00056             return *_cur_dir;
00057         }
00058
00059     protected:
00060         std::shared_ptr<std::string> _cur_dir;
00061     };
00062
00063 } // namespace hocon

```

## 8.4 config\_includer.hpp

```

00001 #pragma once
00002
00003 #include "types.hpp"
00004 #include <string>
00005 #include <memory>
00006 #include "export.h"
00007
00008 namespace hocon {
00015     class LIBCPP_HOCON_EXPORT config_includer {
00016     public:
00032         virtual shared_includer with_fallback(shared_includer fallback) const = 0;
00033
00051         virtual shared_object include(shared_include_context context, std::string what) const = 0;
00052     };
00053 } // namespace hocon

```

## 8.5 config\_includer\_file.hpp

```

00001 #pragma once
00002
00003 #include "export.h"
00004 #include "types.hpp"
00005
00006 namespace hocon {
00014     class LIBCPP_HOCON_EXPORT config_includer_file {
00015     public:
00027         virtual shared_object include_file(shared_include_context context, std::string what) const =
0;
00028     };
00029
00030 } // namespace hocon

```

## 8.6 config\_list.hpp

```

00001 #pragma once
00002
00003 #include "types.hpp"
00004 #include "export.h"
00005 #include <vector>
00006
00007 namespace hocon {

```

```

00008
00037     class LIBCPP_HOCON_EXPORT config_list : public config_value {
00038     public:
00039         config_list(shared_origin origin) : config_value(move(origin)) {}
00040
00041         // list interface
00042         using iterator = std::vector<shared_value>::const_iterator;
00043         virtual bool is_empty() const = 0;
00044         virtual size_t size() const = 0;
00045         virtual shared_value operator[](size_t index) const = 0;
00046         virtual shared_value get(size_t index) const = 0;
00047         virtual iterator begin() const = 0;
00048         virtual iterator end() const = 0;
00049         virtual unwrapped_value unwrapped() const = 0;
00050     };
00051 } // namespace hocon

```

## 8.7 config\_mergeable.hpp

```

00001 #pragma once
00002
00003 #include <memory>
00004 #include "export.h"
00005
00006 namespace hocon {
00007
00008     class LIBCPP_HOCON_EXPORT config_mergeable {
00009     friend class config_value;
00010     public:
00062         virtual std::shared_ptr<const config_mergeable> with_fallback(std::shared_ptr<const
config_mergeable> other) const = 0;
00063
00064     protected:
00069         virtual shared_value to_fallback_value() const = 0;
00070     };
00071
00072 } // namespace hocon

```

## 8.8 config\_object.hpp

```

00001 #pragma once
00002
00003 #include "config_value.hpp"
00004 #include "config_mergeable.hpp"
00005 #include "path.hpp"
00006 #include <unordered_map>
00007 #include "export.h"
00008
00009 namespace hocon {
00010
00011     class LIBCPP_HOCON_EXPORT config_object : public config_value {
00012     friend class config;
00013     friend class config_value;
00014     friend class simple_config_object;
00015     friend class resolve_source;
00016     friend class config_delayed_merge_object;
00017     public:
00025         virtual std::shared_ptr<const config> to_config() const;
00026
00027         config_object(shared_origin origin);
00028
00029         config_value::type value_type() const override;
00030
00031         virtual shared_object with_value(path raw_path, shared_value value) const = 0;
00032         virtual shared_object with_value(std::string key, shared_value value) const = 0;
00033
00046         virtual shared_value attempt_peek_with_partial_resolve(std::string const& key) const = 0;
00047
00052         virtual std::vector<std::string> key_set() const = 0;
00053
00054         // map interface
00055         using iterator = std::unordered_map<std::string, shared_value>::const_iterator;
00056         virtual bool is_empty() const = 0;
00057         virtual size_t size() const = 0;
00058         virtual shared_value operator[](std::string const& key) const = 0;
00059         virtual shared_value get(std::string const& key) const = 0;
00060         virtual iterator begin() const = 0;
00061         virtual iterator end() const = 0;
00062

```



```

00063     protected:
00064         shared_value peek_path(path desired_path) const;
00065         shared_value peek_assuming_resolved(std::string const& key, path original_path) const;
00066
00067         virtual shared_object new_copy(resolve_status const& status, shared_origin origin) const = 0;
00068         shared_value new_copy(shared_origin origin) const override;
00069
00070         shared_value construct_delayed_merge(shared_origin origin, std::vector<shared_value> stack)
00071         const override;
00072
00073         virtual std::unordered_map<std::string, shared_value> const& entry_set() const = 0;
00074         virtual shared_object without_path(path raw_path) const = 0;
00075         virtual shared_object with_only_path(path raw_path) const = 0;
00076         virtual shared_object with_only_path_or_null(path raw_path) const = 0;
00077
00078         static shared_value peek_path(const config_object* self, path desired_path);
00079         static shared_origin merge_origins(std::vector<shared_value> const& stack);
00080     };
00081 } // namespace hocon

```

## 8.9 config\_origin.hpp

```

00001 #pragma once
00002
00003 #include "types.hpp"
00004 #include <memory>
00005 #include <string>
00006 #include <vector>
00007 #include "export.h"
00008
00009 namespace hocon {
00010
00031     class config_origin {
00032     public:
00039         LIBCPP_HOCON_EXPORT virtual std::string const& description() const = 0;
00040
00058         LIBCPP_HOCON_EXPORT virtual shared_origin with_line_number(int line_number) const = 0;
00059
00066         LIBCPP_HOCON_EXPORT virtual int line_number() const = 0;
00067
00078         LIBCPP_HOCON_EXPORT virtual std::vector<std::string> const& comments() const = 0;
00079
00095         LIBCPP_HOCON_EXPORT virtual shared_origin with_comments(std::vector<std::string> comments)
00096         const = 0;
00097     };
00098 } // namespace hocon

```

## 8.10 config\_parse\_options.hpp

```

00001 #pragma once
00002
00003 #include "types.hpp"
00004 #include "config_syntax.hpp"
00005 #include "export.h"
00006
00007 namespace hocon {
00025     class LIBCPP_HOCON_EXPORT config_parse_options {
00026     public:
00033         config_parse_options();
00034
00041         static config_parse_options defaults();
00042
00051         config_parse_options set_syntax(config_syntax syntax) const;
00052
00056         config_syntax const& get_syntax() const;
00057
00068         config_parse_options set_origin_description(shared_string origin_description) const;
00069
00074         shared_string const& get_origin_description() const;
00075
00084         config_parse_options set_allow_missing(bool allow_missing) const;
00085
00090         bool get_allow_missing() const;
00091
00099         config_parse_options set_includer(shared_includer includer) const;
00100
00110         config_parse_options prepend_includer(shared_includer includer) const;

```

```

00111
00120         config_parse_options append_includer(shared_includer includer) const;
00121
00126         shared_includer const& get_includer() const;
00127
00128     private:
00129         config_parse_options(shared_string origin_desc,
00130                             bool allow_missing, shared_includer includer,
00131                             config_syntax syntax = config_syntax::UNSPECIFIED);
00132         config_parse_options with_fallback_origin_description(shared_string origin_description) const;
00133
00134         config_syntax _syntax;
00135         shared_string _origin_description;
00136         bool _allow_missing;
00137         shared_includer _includer;
00138     };
00139 } // namespace hocon

```

## 8.11 config\_parseable.hpp

```

00001 #pragma once
00002
00003 #include "types.hpp"
00004 #include "export.h"
00005
00006 namespace hocon {
00007
00019     class LIBCPP_HOCON_EXPORT config_parseable {
00020     public:
00031         virtual shared_object parse(config_parse_options const& options) const = 0;
00032
00036         virtual shared_origin origin() const = 0;
00037
00044         virtual config_parse_options const& options() const = 0;
00045     };
00046
00047 } // namespace hocon

```

## 8.12 config\_render\_options.hpp

```

00001 #pragma once
00002
00003 #include "export.h"
00004
00005 namespace hocon {
00006
00020     class LIBCPP_HOCON_EXPORT config_render_options {
00021     public:
00026         config_render_options(bool origin_comments = true, bool comments = true,
00027                             bool formatted = true, bool json = true);
00028
00035         static config_render_options concise();
00036
00046         config_render_options set_comments(bool value);
00047
00054         bool get_comments() const;
00055
00072         config_render_options set_origin_comments(bool value);
00073
00080         bool get_origin_comments() const;
00081
00090         config_render_options set_formatted(bool value);
00091
00098         bool get_formatted() const;
00099
00111         config_render_options set_json(bool value);
00112
00119         bool get_json() const;
00120
00121     private:
00122         bool _origin_comments;
00123         bool _comments;
00124         bool _formatted;
00125         bool _json;
00126     };
00127
00128 } // namespace hocon

```

## 8.13 config\_resolve\_options.hpp

```

00001 #pragma once
00002
00003 #include "export.h"
00004
00005 namespace hocon {
00006
00030     class LIBCPP_HOCON_EXPORT config_resolve_options {
00031     public:
00038         config_resolve_options(bool use_system_environment = true, bool allow_unresolved = false);
00039
00046         config_resolve_options set_use_system_environment(bool value) const;
00047
00055         bool get_use_system_environment() const;
00056
00068         config_resolve_options set_allow_unresolved(bool value) const;
00069
00076         bool get_allow_unresolved() const;
00077
00078     private:
00079         bool _use_system_environment;
00080         bool _allow_unresolved;
00081     };
00082
00083 } // namespace hocon

```

## 8.14 config\_syntax.hpp

```

00001 #pragma once
00002
00003 enum class config_syntax {
00010     JSON,
00011
00018     CONF,
00019
00021     UNSPECIFIED
00022
00023     // Original project also supported Java's .properties formats, but we do not
00024 };

```

## 8.15 config\_value.hpp

```

00001
00002 #pragma once
00003
00004 #include "config_origin.hpp"
00005 #include "config_render_options.hpp"
00006 #include "config_mergeable.hpp"
00007 #include "path.hpp"
00008 #include <string>
00009 #include <vector>
00010 #include "export.h"
00011 #include <leatherman/locale/locale.hpp>
00012
00013 namespace hocon {
00014
00015     class unmergeable;
00016     class resolve_source;
00017     class resolve_context;
00018
00019     template<typename T>
00020     struct resolve_result;
00021
00022     enum class resolve_status { RESOLVED, UNRESOLVED };
00023
00039     class LIBCPP_HOCON_EXPORT config_value : public config_mergeable, public
std::enable_shared_from_this<config_value> {
00040     friend class token;
00041     friend class value;
00042     friend class default_transformer;
00043     friend class config;
00044     friend class config_object;
00045     friend class simple_config_object;
00046     friend class simple_config_list;
00047     friend class config_concatenation;
00048     friend class resolve_context;
00049     friend class config_delayed_merge;
00050     friend class config_delayed_merge_object;

```

```

00051     public:
00052     enum class type {
00053         OBJECT, LIST, NUMBER, BOOLEAN, CONFIG_NULL, STRING, UNSPECIFIED
00054     };
00055     static char const* type_name(type t) {
00056         switch (t) {
00057             case type::OBJECT: return "object";
00058             case type::LIST: return "list";
00059             case type::NUMBER: return "number";
00060             case type::BOOLEAN: return "boolean";
00061             case type::CONFIG_NULL: return "null";
00062             case type::STRING: return "string";
00063             case type::UNSPECIFIED: return "unspecified";
00064             default: throw std::logic_error(leatherman::locale::format("Got impossible value for
00065 type enum"));
00066         }
00067     }
00068
00069     virtual shared_origin const& origin() const;
00070
00071     virtual type value_type() const = 0;
00072
00073     char const* value_type_name() const {
00074         return type_name(value_type());
00075     }
00076
00077     virtual unwrapped_value unwrapped() const = 0;
00078
00079     virtual std::string render() const;
00080
00081     virtual std::string render(config_render_options options) const;
00082
00083     shared_config at_key(std::string const& key) const;
00084
00085     shared_config at_path(std::string const& path_expression) const;
00086
00087     virtual shared_value with_origin(shared_origin origin) const;
00088
00089     virtual shared_value relativized(std::string prefix) const { return shared_from_this(); }
00090
00091     virtual resolve_status get_resolve_status() const;
00092
00093     friend resolve_status resolve_status_from_values(std::vector<shared_value> const& v);
00094
00095     std::shared_ptr<const config_mergeable> with_fallback(std::shared_ptr<const config_mergeable>
00096 other) const override;
00097
00098     virtual bool operator==(config_value const& other) const = 0;
00099
00100     virtual std::string transform_to_string() const;
00101
00102     protected:
00103     config_value(shared_origin origin);
00104
00105     virtual void render(std::string& result, int indent, bool at_root, std::string const& at_key,
00106 config_render_options options) const;
00107     virtual void render(std::string& result, int indent, bool at_root, config_render_options
00108 options) const;
00109     static void indent(std::string& result, int indent, config_render_options const& options);
00110
00111     shared_config at_key(shared_origin origin, std::string const& key) const;
00112     shared_config at_path(shared_origin origin, path raw_path) const;
00113
00114     virtual shared_value new_copy(shared_origin origin) const = 0;
00115
00116     virtual resolve_result<shared_value>
00117         resolve_substitutions(resolve_context const& context, resolve_source const& source) const;
00118
00119     static std::vector<shared_value> replace_child_in_list(std::vector<shared_value> const&
00120 values,
00121 shared_value const& child, shared_value
00122 replacement);
00123     static bool has_descendant_in_list(std::vector<shared_value> const& values, shared_value
00124 const& descendant);
00125
00126     class modifier {
00127     public:
00128         virtual shared_value modify_child_may_throw(std::string const& key_or_null, shared_value
00129 v) = 0;
00130     };
00131
00132     class no_exceptions_modifier : public modifier {
00133     public:
00134         no_exceptions_modifier(std::string prefix);
00135
00136         shared_value modify_child_may_throw(std::string const &key_or_null, shared_value v)
00137         override;

```

```

00222         shared_value modify_child(std::string const& key, shared_value v) const;
00223     private:
00224         std::string _prefix;
00225     };
00226     void require_not_ignoring_fallbacks() const;
00227
00228     /* this is virtualized rather than a field because only some subclasses
00229      * really need to store the boolean, and they may be able to pack it
00230      * with another boolean to save space.
00231      */
00232     virtual bool ignores_fallbacks() const;
00233     virtual shared_value with_fallbacks_ignored() const;
00234
00235     shared_value merged_with_the_unmergeable(std::vector<shared_value> stack,
00236                                              std::shared_ptr<const unmergeable> fallback) const;
00237     shared_value merged_with_the_unmergeable(std::shared_ptr<const unmergeable> fallback) const;
00238
00239     shared_value merged_with_object(std::vector<shared_value> stack, shared_object fallback)
00240     const;
00241     virtual shared_value merged_with_object(shared_object fallback) const;
00242
00243     shared_value merged_with_non_object(std::vector<shared_value> stack, shared_value fallback)
00244     const;
00245     virtual shared_value merged_with_non_object(shared_value fallback) const;
00246
00247     virtual shared_value construct_delayed_merge(shared_origin origin, std::vector<shared_value>
00248     stack) const;
00249
00250     shared_value to_fallback_value() const override;
00251
00252     template<typename T>
00253     static bool equals(config_value const& other, std::function<bool(T const&)> checker)
00254     {
00255         // Use pointer casts to avoid exceptions.
00256         auto other_t = dynamic_cast<T const*>(&other);
00257         if (!other_t) {
00258             return false;
00259         }
00260         // Pass to checker as a reference to clarify the object will exist.
00261         return checker(*other_t);
00262     }
00263
00264     private:
00265         shared_value delay_merge(std::vector<shared_value> stack, shared_value fallback) const;
00266         shared_origin _origin;
00267     };
00268 } // namespace hocon

```

## 8.16 config\_value\_factory.hpp

```

00001 # pragma once
00002
00003 #include "types.hpp"
00004 #include "export.h"
00005 #include <string>
00006
00007 namespace hocon {
00008     class LIBCPP_HOCON_EXPORT config_value_factory {
00009     public:
00010         static shared_value from_any_ref(unwrapped_value value, std::string origin_description = "");
00011     };
00012 } // namespace hocon

```

## 8.17 export.h

```

00001
00002 #ifndef LIBCPP_HOCON_EXPORT_H
00003 #define LIBCPP_HOCON_EXPORT_H
00004
00005 #ifndef LIBCPP_HOCON_STATIC_DEFINE
00006 # define LIBCPP_HOCON_EXPORT
00007 # define LIBCPP_HOCON_NO_EXPORT
00008 #else
00009 # undef LIBCPP_HOCON_EXPORT
00010 # undef LIBCPP_HOCON_NO_EXPORT
00011 # define LIBCPP_HOCON_EXPORT __attribute__((visibility("default")))
00012 # define LIBCPP_HOCON_NO_EXPORT __attribute__((visibility("hidden")))

```

```

00013 #     else
00014 #         /* We are using this library */
00015 #         define LIBCPP_HOCON_EXPORT __attribute__((visibility("default")))
00016 #     endif
00017 # endif
00018
00019 # ifndef LIBCPP_HOCON_NO_EXPORT
00020 #     define LIBCPP_HOCON_NO_EXPORT __attribute__((visibility("hidden")))
00021 # endif
00022 #endif
00023
00024 #ifndef LIBCPP_HOCON_DEPRECATED
00025 #     define LIBCPP_HOCON_DEPRECATED __attribute__((__deprecated__))
00026 #endif
00027
00028 #ifndef LIBCPP_HOCON_DEPRECATED_EXPORT
00029 #     define LIBCPP_HOCON_DEPRECATED_EXPORT LIBCPP_HOCON_EXPORT LIBCPP_HOCON_DEPRECATED
00030 #endif
00031
00032 #ifndef LIBCPP_HOCON_DEPRECATED_NO_EXPORT
00033 #     define LIBCPP_HOCON_DEPRECATED_NO_EXPORT LIBCPP_HOCON_NO_EXPORT LIBCPP_HOCON_DEPRECATED
00034 #endif
00035
00036 #if 0 /* DEFINE_NO_DEPRECATED */
00037 #     ifndef LIBCPP_HOCON_NO_DEPRECATED
00038 #         define LIBCPP_HOCON_NO_DEPRECATED
00039 #     endif
00040 #endif
00041
00042 #endif /* LIBCPP_HOCON_EXPORT_H */

```

## 8.18 functional\_list.hpp

```

00001 #pragma once
00002
00003 #include <cassert>
00004 #include <memory>
00005 #include <functional>
00006 #include <initializer_list>
00007 #include <iterator>
00008 #include <iostream> // print
00009
00010 template<class T> class FwdListIter;
00011
00012 template<class T>
00013 class List
00014 {
00015     struct Item
00016     {
00017         Item(T v, std::shared_ptr<const Item> tail)
00018             : _val(v), _next(std::move(tail))
00019         {}
00020         // singleton
00021         explicit Item(T v) : _val(v) {}
00022         // ~Item() { std::cout << "~" << _val << std::endl; }
00023         T _val;
00024         std::shared_ptr<const Item> _next;
00025     };
00026     friend Item;
00027     explicit List(std::shared_ptr<const Item> items)
00028         : _head(std::move(items)) {}
00029 public:
00030     // Empty list
00031     List() {}
00032     // Cons
00033     List(T v, List const & tail)
00034         : _head(std::make_shared<Item>(v, tail._head)) {}
00035     // Singleton
00036     explicit List(T v) : _head(std::make_shared<Item>(v)) {}
00037
00038     bool isEmpty() const { return !_head; } // conversion to bool
00039     T front() const
00040     {
00041         assert(!isEmpty());
00042         return _head->_val;
00043     }
00044     List popped_front() const
00045     {
00046         assert(!isEmpty());
00047         return List(_head->_next);
00048     }
00049     // Additional utilities
00050     List pushed_front(T v) const

```

```

00051     {
00052         return List(v, *this);
00053     }
00054     List take(int n)
00055     {
00056         if (n <= 0 || isEmpty()) return List();
00057         return popped_front().take(n - 1).pushed_front(front());
00058     }
00059     List insertedAt(int i, T v) const
00060     {
00061         if (i == 0) {
00062             return pushed_front(v);
00063         } else {
00064             assert(!isEmpty());
00065             return List<T>(front(), popped_front().insertedAt(i - 1, v));
00066         }
00067     }
00068     List removed(T v) const
00069     {
00070         if (isEmpty()) return List();
00071         if (v == front())
00072             return popped_front().removed(v);
00073         return List(front(), popped_front().removed(v));
00074     }
00075     List removed1(T v) const
00076     {
00077         if (isEmpty()) return List();
00078         if (v == front())
00079             return popped_front();
00080         return List(front(), popped_front().removed(v));
00081     }
00082     bool member(T v) const
00083     {
00084         if (isEmpty()) return false;
00085         if (v == front()) return true;
00086         return popped_front().member(v);
00087     }
00088     template<class F>
00089     void forEach(F f) const
00090     {
00091         Item const * it = _head.get();
00092         while (it != nullptr)
00093         {
00094             f(it->_val);
00095             it = it->_next.get();
00096         }
00097     }
00098
00099     friend class FwdListIter<T>;
00100     // For debugging
00101     int headCount() const { return _head.use_count(); }
00102 private:
00103     std::shared_ptr<const Item> _head;
00104 };
00105
00106 template<class T, class P>
00107 bool all(List<T> const & lst, P & p)
00108 {
00109     if (lst.isEmpty())
00110         return true;
00111     if (!p(lst.front()))
00112         return false;
00113     return all(lst.popped_front(), p);
00114 }
00115
00116 template<class T>
00117 class FwdListIter : public std::iterator<std::forward_iterator_tag, T>
00118 {
00119 public:
00120     FwdListIter() {} // end
00121     FwdListIter(List<T> const & lst) : _cur(lst._head)
00122     {}
00123     T operator*() const { return _cur->_val; }
00124     FwdListIter & operator++()
00125     {
00126         _cur = _cur->_next;
00127         return *this;
00128     }
00129     bool operator==(FwdListIter<T> const & other)
00130     {
00131         return _cur == other._cur;
00132     }
00133     bool operator!=(FwdListIter<T> const & other)
00134     {
00135         return !(*this == other);
00136     }
00137 private:

```

```

00138     std::shared_ptr<const typename List<T>::Item> _cur;
00139 };
00140
00141 template<class T>
00142 class OutListIter : public std::iterator<std::output_iterator_tag, T>
00143 {
00144 public:
00145     OutListIter() {}
00146     T & operator*() { return _val; }
00147     OutListIter & operator++()
00148     {
00149         _lst = List<T>(_val, _lst);
00150         return *this;
00151     }
00152     List<T> getList() const { return _lst; }
00153 private:
00154     T _val;
00155     List<T> _lst;
00156 };
00157
00158
00159 namespace std
00160 {
00161     template<class T>
00162     FwdListIter<T> begin(List<T> const & lst)
00163     {
00164         return FwdListIter<T>(lst);
00165     }
00166     template<class T>
00167     FwdListIter<T> end(List<T> const & lst)
00168     {
00169         return FwdListIter<T>();
00170     }
00171 }
00172
00173 template<class T>
00174 List<T> concat(List<T> const & a, List<T> const & b)
00175 {
00176     if (a.isEmpty())
00177         return b;
00178     return List<T>(a.front(), concat(a.popped_front(), b));
00179 }
00180
00181 template<class T, class F>
00182 auto fmap(F f, List<T> lst) -> List<decltype(f(lst.front()))>
00183 {
00184     using U = decltype(f(lst.front()));
00185     static_assert(std::is_convertible<F, std::function<U(T)>::value,
00186         "fmap requires a function type U(T)");
00187     if (lst.isEmpty())
00188         return List<U>();
00189     else
00190         return List<U>(f(lst.front()), fmap(f, lst.popped_front()));
00191 }
00192
00193 template<class T, class P>
00194 List<T> filter(P p, List<T> lst)
00195 {
00196     static_assert(std::is_convertible<P, std::function<bool(T)>::value,
00197         "filter requires a function type bool(T)");
00198     if (lst.isEmpty())
00199         return List<T>();
00200     if (p(lst.front()))
00201         return List<T>(lst.front(), filter(p, lst.popped_front()));
00202     else
00203         return filter(p, lst.popped_front());
00204 }
00205
00206 template<class T, class U, class F>
00207 U foldr(F f, U acc, List<T> lst)
00208 {
00209     static_assert(std::is_convertible<F, std::function<U(T, U)>::value,
00210         "foldr requires a function type U(T, U)");
00211     if (lst.isEmpty())
00212         return acc;
00213     else
00214         return f(lst.front(), foldr(f, acc, lst.popped_front()));
00215 }
00216
00217 template<class T, class U, class F>
00218 U foldl(F f, U acc, List<T> lst)
00219 {
00220     static_assert(std::is_convertible<F, std::function<U(U, T)>::value,
00221         "foldl requires a function type U(U, T)");
00222     if (lst.isEmpty())
00223         return acc;
00224     else

```



```

00225         return foldl(f, f(acc, lst.front()), lst.popped_front());
00226     }
00227
00228 // Set difference a \ b
00229 template<class T>
00230 List<T> set_diff(List<T> const & as, List<T> const & bs)
00231 {
00232     return foldl([], (List<T> const & acc, T x) {
00233         return acc.removed(x);
00234     }, as, bs);
00235 }
00236
00237 // Set union of two lists, xs u ys
00238 // Assume no duplicates inside either list
00239 template<class T>
00240 List<T> set_union(List<T> const & xs, List<T> const & ys)
00241 {
00242     // xs u ys = (ys \ xs) ++ xs
00243     // removed all xs from ys
00244     auto trimmed = foldl([], (List<T> const & acc, T x) {
00245         return acc.removed(x);
00246     }, ys, xs);
00247     return concat(trimmed, xs);
00248 }
00249
00250 template<class T>
00251 List<T> concatAll(List<List<T>> const & xss)
00252 {
00253     if (xss.isEmpty()) return List<T>();
00254     return concat(xss.front(), concatAll(xss.popped_front()));
00255 }
00256
00257 // consumes the list when called:
00258 // forEach(std::move(lst), f);
00259
00260 template<class T, class F>
00261 void forEach(List<T> lst, F f)
00262 {
00263     static_assert(std::is_convertible<F, std::function<void(T)>>::value,
00264         "forEach requires a function type void(T)");
00265     while (!lst.isEmpty()) {
00266         f(lst.front());
00267         lst = lst.popped_front();
00268     }
00269 }
00270
00271 template<class Beg, class End>
00272 auto fromIt(Beg it, End end) -> List<typename Beg::value_type>
00273 {
00274     typedef typename Beg::value_type T;
00275     if (it == end)
00276         return List<T>();
00277     T item = *it;
00278     return List<T>(item, fromIt(++it, end));
00279 }
00280
00281 template<class T, class F>
00282 List<T> iterateN(F f, T init, int count)
00283 {
00284     if (count <= 0) return List<T>();
00285     return iterateN(f, f(init), count - 1).pushed_front(init);
00286 }
00287
00288 // Pass lst by value not reference!
00289 template<class T>
00290 void printRaw(List<T> lst)
00291 {
00292     if (lst.isEmpty()) {
00293         std::cout << std::endl;
00294     } else {
00295         std::cout << "(" << lst.front() << ", " << lst.headCount() - 1 << " ";
00296         printRaw(lst.popped_front());
00297     }
00298 }
00299
00300 template<class T>
00301 std::ostream& operator<<(std::ostream& os, List<T> const & lst)
00302 {
00303     os << "[";
00304     forEach(lst, [&os](T v) {
00305         os << v << " ";
00306     });
00307     os << "]";
00308     return os;
00309 }
00310
00311 template<class T>

```

```

00312 List<T> reversed(List<T> const & lst)
00313 {
00314     return foldl({}(List<T> const & acc, T v)
00315                 {
00316                     return List<T>(v, acc);
00317                 }, List<T>(), lst);
00318 }

```

## 8.19 config\_document.hpp

```

00001 #pragma once
00002
00003 #include <string>
00004 #include <memory>
00005 #include <hocon/config_value.hpp>
00006 #include "../export.h"
00007
00008 namespace hocon {
00026     class LIBCPP_HOCON_EXPORT config_document {
00027     public:
00046         virtual std::unique_ptr<config_document> with_value_text(std::string path, std::string
newValue) const = 0;
00047
00060         virtual std::unique_ptr<config_document> with_value(std::string path,
std::shared_ptr<config_value> new_value)
00061         const = 0;
00062
00072         virtual std::unique_ptr<config_document> without_path(std::string path) const = 0;
00073
00080         virtual bool has_path(std::string const& path) const = 0;
00081
00087         virtual std::string render() const = 0;
00088     };
00089
00093     bool operator==(config_document const& lhs, config_document const& rhs);
00094
00095 } // namespace hocon

```

## 8.20 config\_document\_factory.hpp

```

00001 #pragma once
00002
00003 #include "config_document.hpp"
00004 #include <hocon/config_parse_options.hpp>
00005 #include "../export.h"
00006
00010 namespace hocon { namespace config_document_factory {
00011
00021     LIBCPP_HOCON_EXPORT std::shared_ptr<config_document> parse_file(std::string input_file_path,
config_parse_options options);
00022
00023     LIBCPP_HOCON_EXPORT std::shared_ptr<config_document> parse_file(std::string input_file_path);
00026
00034     LIBCPP_HOCON_EXPORT std::shared_ptr<config_document> parse_string(std::string s,
config_parse_options options);
00035
00037     LIBCPP_HOCON_EXPORT std::shared_ptr<config_document> parse_string(std::string s);
00038
00039 }} // namespace hocon::config_document_factory

```

## 8.21 config\_node.hpp

```

00001 #pragma once
00002
00003 #include <string>
00004 #include "../export.h"
00005
00006 namespace hocon {
00021     class LIBCPP_HOCON_EXPORT config_node {
00022     public:
00029         virtual std::string render() const = 0;
00030     };
00031
00032 } // namespace hocon

```

## 8.22 path.hpp

```

00001 #pragma once
00002
00003 #include <hocon/functional_list.hpp>
00004 #include <hocon/types.hpp>
00005
00006 #include <string>
00007 #include <vector>
00008 #include <memory>
00009 #include "export.h"
00010
00011 namespace hocon {
00012
00013     class LIBCPP_HOCON_EXPORT path {
00014     public:
00015         path();
00016         explicit path(std::string first, path const& remainder);
00017         explicit path(std::vector<std::string> elements);
00018         explicit path(std::vector<path> paths_to_concat);
00019
00020         shared_string first() const;
00021
00022         path remainder() const;
00023
00024         path parent() const;
00025
00026         bool has_remainder() const;
00027         bool empty() const;
00028         shared_string last() const;
00029         path prepend(path prefix);
00030         int length() const;
00031         path sub_path(int remove_from_front);
00032         path sub_path(int start_index, int end_index);
00033         bool starts_with(path other) const;
00034
00035         bool operator==(path const& other) const;
00036         bool operator!=(path const& other) const;
00037
00038         static bool has_funky_chars(std::string const& s);
00039
00040         void append_to_string(std::string& base) const;
00041
00042         std::string to_string() const;
00043
00044         std::string render() const;
00045
00046         static path new_key(std::string key);
00047         static path new_path(std::string path);
00048
00049     private:
00050         path(List<shared_string> other_path);
00051         List<shared_string> _path;
00052     };
00053
00054 } // namespace hocon

```

## 8.23 program\_options.hpp

```

00001 #pragma once
00002
00003 #include "config.hpp"
00004 #include "config_list.hpp"
00005
00006 #include <boost/format.hpp>
00007 #include <boost/program_options.hpp>
00008
00009 namespace hocon { namespace program_options {
00010     namespace po = boost::program_options;
00011
00012     template<class charT>
00013     po::basic_parsed_options<charT>
00014     parse_hocon(shared_config cfg, const po::options_description& desc, bool allow_unregistered) {
00015         po::parsed_options result(&desc);
00016
00017         std::map<std::string, shared_config> to_do;
00018         to_do.emplace("", cfg);
00019
00020         while (!to_do.empty()) {
00021             auto iter = to_do.begin();
00022             auto prefix = iter->first;
00023             auto cfg = iter->second;

```

```

00024         to_do.erase(iter);
00025
00026         for (const auto& entry : cfg->entry_set()) {
00027             po::option opt;
00028             if (prefix.empty()) {
00029                 opt.string_key = entry.first;
00030             } else {
00031                 opt.string_key = prefix + "." + entry.first;
00032             }
00033
00034             // Skips options that are not registered in the description.
00035             // This is different behavior than the built in program_options
00036             // parsers, which pass the options along somehow. But for now
00037             // it stops an exception from being thrown if there is an unknown
00038             // item in the config file.
00039             if (allow_unregistered && !desc.find_nothrow(opt.string_key, false)) {
00040                 continue;
00041             }
00042
00043             if (entry.second->value_type() == config_value::type::LIST) {
00044                 // if this is a list, we want to check if any of the entries are
00045                 // objects. If so, we need to further expand those sub-trees, with
00046                 // list indices being expanded into our key
00047
00048                 auto list = std::dynamic_pointer_cast<const config_list>(entry.second);
00049                 for (size_t i = 0; i < list->size(); ++i) {
00050                     const auto& value = list->get(i);
00051                     if (value->value_type() == config_value::type::LIST ||
00052                         value->value_type() == config_value::type::OBJECT) {
00053                         boost::throw_exception(po::invalid_config_file_syntax(list->transform_to_string(),
00054                             po::invalid_syntax::unrecognized_line));
00055                     } else {
00056                         opt.value.push_back(value->transform_to_string());
00057                     }
00058                 } else {
00059                     opt.value.push_back(entry.second->transform_to_string());
00060                 }
00061                 if (!opt.value.empty()) {
00062                     result.options.emplace_back(std::move(opt));
00063                 }
00064             }
00065         }
00066
00067         // let Boost convert our utf-8 entries to wchars if needed
00068         return po::basic_parsed_options<charT>(result);
00069     }
00070
00071     template<class charT>
00072     po::basic_parsed_options<charT>
00073     parse_file(std::basic_string<charT> file_basename, const po::options_description& desc, bool
00074         allow_unregistered=false) {
00075         shared_config cfg = config::parse_file_any_syntax(file_basename)->resolve();
00076         return parse_hocon<charT>(cfg, desc, allow_unregistered);
00077     }
00078
00079     template<class charT>
00080     po::basic_parsed_options<charT>
00081     parse_string(std::basic_string<charT> s, const po::options_description& desc, bool
00082         allow_unregistered=false) {
00083         shared_config cfg = config::parse_string(s)->resolve();
00084         return parse_hocon<charT>(cfg, desc, allow_unregistered);
00085     }
00086 }

```

## 8.24 types.hpp

```

00001 #pragma once
00002
00003 #include <memory>
00004 #include <vector>
00005 #include <unordered_map>
00006 #pragma GCC diagnostic push
00007 #pragma GCC diagnostic ignored "-Waddress"
00008 #if defined(__GNUC__) && __GNUC__ > 5
00009 #pragma GCC diagnostic ignored "-Wnonnull-compare"
00010 #endif
00011 #include "boost/variant.hpp"
00012 #pragma GCC diagnostic pop
00013
00014 namespace hocon {
00015

```

```

00021     using duration = std::pair<int64_t, int>;
00022
00023     class config;
00024     using shared_config = std::shared_ptr<const config>;
00025
00026     class config_object;
00027     using shared_object = std::shared_ptr<const config_object>;
00028
00029     class config_origin;
00030     using shared_origin = std::shared_ptr<const config_origin>;
00031
00032     class path;
00033
00034     class config_value;
00035     using shared_value = std::shared_ptr<const config_value>;
00036
00037     class config_list;
00038     using shared_list = std::shared_ptr<const config_list>;
00039
00040     typedef boost::make_recursive_variant<boost::blank, std::string, int64_t, double, int, bool,
00041         std::vector<boost::recursive_variant_>, std::unordered_map<std::string,
00042             boost::recursive_variant_>::type unwrapped_value;
00043
00044     class container;
00045     using shared_container = std::shared_ptr<const container>;
00046
00047     class abstract_config_node;
00048     using shared_node = std::shared_ptr<const abstract_config_node>;
00049     using shared_node_list = std::vector<shared_node>;
00050
00051     using shared_string = std::shared_ptr<const std::string>;
00052
00053     class config_parse_options;
00054
00055     class config_includer;
00056     using shared_includer = std::shared_ptr<const config_includer>;
00057
00058     class config_include_context;
00059     using shared_include_context = std::shared_ptr<const config_include_context>;
00060
00061     class config_parseable;
00062     using shared_parseable = std::shared_ptr<const config_parseable>;
00063 } // namespace hocon

```

## 8.25 hocon/version.h File Reference

Declares macros for the cpp-hocon library version.

### Macros

- `#define CPP_HOCON_VERSION_MAJOR 0`  
*The cpp-hocon library major version.*
- `#define CPP_HOCON_VERSION_MINOR 3`  
*The cpp-hocon library minor version.*
- `#define CPP_HOCON_VERSION_PATCH 0`  
*The cpp-hocon library patch version.*
- `#define CPP_HOCON_VERSION "0.3.0"`  
*The cpp-hocon library version as a string (without commit SHA1).*
- `#define CPP_HOCON_VERSION_WITH_COMMIT "0.3.0"`  
*The cpp-hocon library version as a string (with commit SHA1).*

### 8.25.1 Detailed Description

Declares macros for the cpp-hocon library version.

Definition in file [version.h](#).

## 8.25.2 Macro Definition Documentation

### 8.25.2.1 CPP\_HOCON\_VERSION

```
#define CPP_HOCON_VERSION "0.3.0"
```

The cpp-hocon library version as a string (without commit SHA1).

Definition at line 23 of file [version.h](#).

### 8.25.2.2 CPP\_HOCON\_VERSION\_MAJOR

```
#define CPP_HOCON_VERSION_MAJOR 0
```

The cpp-hocon library major version.

Definition at line 10 of file [version.h](#).

### 8.25.2.3 CPP\_HOCON\_VERSION\_MINOR

```
#define CPP_HOCON_VERSION_MINOR 3
```

The cpp-hocon library minor version.

Definition at line 14 of file [version.h](#).

### 8.25.2.4 CPP\_HOCON\_VERSION\_PATCH

```
#define CPP_HOCON_VERSION_PATCH 0
```

The cpp-hocon library patch version.

Definition at line 18 of file [version.h](#).

### 8.25.2.5 CPP\_HOCON\_VERSION\_WITH\_COMMIT

```
#define CPP_HOCON_VERSION_WITH_COMMIT "0.3.0"
```

The cpp-hocon library version as a string (with commit SHA1).

Definition at line 28 of file [version.h](#).

## 8.26 version.h

[Go to the documentation of this file.](#)

```
00001
00005 #pragma once
00006
00010 #define CPP_HOCON_VERSION_MAJOR 0
00014 #define CPP_HOCON_VERSION_MINOR 3
00018 #define CPP_HOCON_VERSION_PATCH 0
00019
00023 #define CPP_HOCON_VERSION "0.3.0"
00024
00028 #define CPP_HOCON_VERSION_WITH_COMMIT "0.3.0"
```

## 8.27 config\_document\_parser.hpp

```
00001 #pragma once
00002
00003 #include <hocon/config_parse_options.hpp>
00004 #include <internal/nodes/config_node_object.hpp>
00005 #include <internal/nodes/config_node_root.hpp>
00006 #include <internal/nodes/config_node_include.hpp>
00007 #include <internal/simple_config_origin.hpp>
00008 #include <internal/tokenizer.hpp>
00009
00010 #include <stack>
00011
00012 namespace hocon { namespace config_document_parser {
00013
00014     std::shared_ptr<config_node_root> parse(token_iterator tokens,
00015                                           shared_origin origin,
00016                                           config_parse_options options);
00017
00018     shared_node_value parse_value(token_iterator tokens,
00019                                   shared_origin origin,
00020                                   config_parse_options options);
00021
00022     class parse_context {
00023     public:
00024         parse_context(config_syntax flavor, shared_origin origin, token_iterator tokens);
00025
00026         std::shared_ptr<config_node_root> parse();
00027
00031         shared_node_value parse_single_value();
00032
00033     private:
00034         parse_exception parse_error(std::string message);
00035
00036         shared_token pop_token();
00037         shared_token next_token();
00038         shared_token next_token_collecting_whitespace(shared_node_list& nodes);
00039         void put_back(shared_token token);
00040
00049         bool check_element_separator(shared_node_list& nodes);
00050
00052         shared_node_value consolidate_values(shared_node_list& nodes);
00053
00054         std::string add_quote_suggestion(std::string bad_token, std::string message,
00055                                         bool inside_equals, path* last_path);
00056
00057         std::string add_quote_suggestion(std::string bad_token, std::string message);
00058
00059         shared_node_value parse_value(shared_token t);
00060         std::shared_ptr<config_node_path> parse_key(shared_token t);
00061         bool is_key_value_separator(shared_token t);
00062         std::shared_ptr<config_node_include> parse_include(shared_node_list& children);
00063         std::shared_ptr<config_node_complex_value> parse_object(bool had_open_curly);
00064         std::shared_ptr<config_node_complex_value> parse_array();
00065
00066         static bool is_include_keyword(shared_token t);
00067         static bool is_unquoted_whitespace(shared_token t);
00068         static bool is_valid_array_element(shared_token t);
00069
00070         int _line_number;
00071         std::stack<shared_token> _buffer;
00072         token_iterator _tokens;
00073         config_syntax _flavor;
00074         shared_origin _base_origin;
00075
00076         // this is the number of "equals" we are inside,
00077         // used to modify the error message to reflect that
```

```

00078         // someone may think this is .properties format.
00079         int _equals_count;
00080     };
00081
00082
00083 }} // namespace hocon::config_document_parser

```

## 8.28 config\_parser.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004 #include <hocon/config_syntax.hpp>
00005 #include <hocon/config_include_context.hpp>
00006 #include <hocon/config_parse_options.hpp>
00007 #include <hocon/path.hpp>
00008 #include <internal/nodes/config_node_concatenation.hpp>
00009 #include <internal/nodes/config_node_root.hpp>
00010 #include <internal/nodes/abstract_config_node_value.hpp>
00011 #include <internal/nodes/config_node_object.hpp>
00012 #include <internal/nodes/config_node_array.hpp>
00013 #include <internal/nodes/config_node_include.hpp>
00014 #include <internal/full_includer.hpp>
00015 #include <memory>
00016 #include <vector>
00017 #include <unordered_map>
00018 #include <string>
00019
00020 namespace hocon { namespace config_parser {
00021
00022     shared_value parse(std::shared_ptr<const config_node_root> document,
00023                       shared_origin origin,
00024                       config_parse_options options,
00025                       shared_include_context include_context);
00026
00027     class parse_context {
00028     public:
00029         int _line_number;
00030         std::shared_ptr<const config_node_root> _document;
00031         std::shared_ptr<const full_includer> _includer;
00032         shared_include_context _include_context;
00033         config_syntax _flavor;
00034         shared_origin _base_origin, _line_origin;
00035         std::vector<path> _path_stack;
00036
00037         parse_context(config_syntax flavor, shared_origin origin, std::shared_ptr<const
00038         config_node_root> document,
00039                       std::shared_ptr<const full_includer> includer, shared_include_context
00040                       include_context);
00041
00042         shared_value parse();
00043         int array_count;
00044
00045     private:
00046         static shared_object create_value_under_path(path p, shared_value value);
00047         shared_origin line_origin() const;
00048         path full_current_path() const;
00049         shared_value parse_value(shared_node_value n, std::vector<std::string>& comments);
00050         void parse_include(std::unordered_map<std::string, shared_value> &values,
00051                           std::shared_ptr<const config_node_include> n);
00052         shared_object parse_object(shared_node_object n);
00053         shared_value parse_array(shared_node_array n);
00054         shared_value parse_concatenation(shared_node_concatenation n);
00055     };
00056 }} // namespace hocon::config_parser

```

## 8.29 config\_util.hpp

```

00001 #pragma once
00002
00003 #include <string>
00004
00005 namespace hocon {
00006
00007     bool is_whitespace(char codepoint);
00008
00009     bool is_whitespace_not_newline(char codepoint);

```



```

00010
00011     bool is_C0_control(char c);
00012
00013     std::string render_json_string(std::string const& s);
00014
00015     std::string render_string_unquoted_if_possible(std::string const& s);
00016
00017 } // namespace hocon

```

## 8.30 container.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004 namespace hocon {
00005
00012     class container {
00013     public:
00019         virtual shared_value replace_child(shared_value const& child, shared_value replacement) const
= 0;
00020
00025         virtual bool has_descendant(shared_value const& descendant) const = 0;
00026     };
00027
00028 } // namespace hocon

```

## 8.31 default\_transformer.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004
00005 namespace hocon {
00006
00007     class default_transformer {
00008     public:
00009         static shared_value transform(shared_value value, config_value::type requested);
00010     };
00011
00012 } // namespace hocon

```

## 8.32 full\_includer.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_includer.hpp>
00004 #include <hocon/config_includer_file.hpp>
00005
00006
00007 namespace hocon {
00008
00009     class full_includer : public config_includer, public config_includer_file {
00010         // This is a faithful port of the Java fullIncluder interface
00011     };
00012
00013 } // namespace hocon

```

## 8.33 abstract\_config\_node.hpp

```

00001 #pragma once
00002
00003 #include <hocon/parser/config_node.hpp>
00004 #include <internal/token.hpp>
00005 #include <vector>
00006
00007 namespace hocon {
00008
00009     class abstract_config_node : public config_node {
00010     public:
00011         std::string render() const;
00012         bool operator==(const abstract_config_node &other) const;
00013         virtual token_list get_tokens() const = 0;
00014     };
00015
00016 } // namespace hocon

```

### 8.34 abstract\_config\_node\_value.hpp

```

00001 #pragma once
00002
00003 #include "abstract_config_node.hpp"
00004
00005 namespace hocon {
00006
00007     class abstract_config_node_value : public abstract_config_node { };
00008
00009     using shared_node_value = std::shared_ptr<const abstract_config_node_value>;
00010
00011 } // namespace hocon
00012

```

### 8.35 config\_node\_array.hpp

```

00001 #pragma once
00002
00003 #include "config_node_complex_value.hpp"
00004
00005 namespace hocon {
00006
00007     class config_node_array;
00008     using shared_node_array = std::shared_ptr<const config_node_array>;
00009
00010     class config_node_array : public config_node_complex_value {
00011     public:
00012         config_node_array(shared_node_list children);
00013
00014         std::shared_ptr<const config_node_complex_value> new_node(shared_node_list nodes) const
00015         override;
00016     };
00017 } // namespace hocon
00018

```

### 8.36 config\_node\_comment.hpp

```

00001 #pragma once
00002
00003 #include "config_node_single_token.hpp"
00004
00005 namespace hocon {
00006
00007     class config_node_comment : public config_node_single_token {
00008     public:
00009         config_node_comment(shared_token comment);
00010
00011         std::string comment_text() const;
00012     };
00013
00014 } // namespace hocon
00015

```

### 8.37 config\_node\_complex\_value.hpp

```

00001 #pragma once
00002
00003 #include "abstract_config_node_value.hpp"
00004
00005 namespace hocon {
00006
00007     class config_node_complex_value : public abstract_config_node_value {
00008     public:
00009         config_node_complex_value(shared_node_list children);
00010
00011         token_list get_tokens() const override;
00012
00013         shared_node_list const& children() const;
00014
00015         std::shared_ptr<const config_node_complex_value> indent_text(
00016             shared_node indentation) const;
00017
00018         virtual std::shared_ptr<const config_node_complex_value> new_node(
00019             shared_node_list nodes) const = 0;
00020
00021     private:
00022

```

```

00022         shared_node_list _children;
00023     };
00024
00025 } // namespace hocon

```

## 8.38 config\_node\_concatenation.hpp

```

00001 #pragma once
00002
00003 #include "config_node_complex_value.hpp"
00004
00005 namespace hocon {
00006
00007     class config_node_concatenation : public config_node_complex_value {
00008     public:
00009         config_node_concatenation(shared_node_list children);
00010
00011         std::shared_ptr<const config_node_complex_value> new_node(shared_node_list nodes) const
00012         override;
00013     };
00014
00015     using shared_node_concatenation = std::shared_ptr<const config_node_concatenation>;
00016 } // namespace hocon

```

## 8.39 config\_node\_field.hpp

```

00001 #pragma once
00002
00003 #include "abstract_config_node_value.hpp"
00004 #include "config_node_path.hpp"
00005
00006 namespace hocon {
00007
00008     class config_node_field : public abstract_config_node_value {
00009     public:
00010         config_node_field(shared_node_list children);
00011
00012         token_list get_tokens() const override;
00013
00014         std::shared_ptr<const config_node_field> replace_value(shared_node_value new_value) const;
00015         shared_node_value get_value() const;
00016         shared_token separator() const;
00017         std::vector<std::string> comments() const;
00018         std::shared_ptr<const config_node_path> path() const;
00019
00020     private:
00021         shared_node_list _children;
00022     };
00023 } // namespace hocon

```

## 8.40 config\_node\_include.hpp

```

00001 #pragma once
00002
00003 #include "abstract_config_node.hpp"
00004
00005 namespace hocon {
00006
00007     enum class config_include_kind { URL, FILE, CLASSPATH, HEURISTIC };
00008
00009     class config_node_include : public abstract_config_node {
00010     public:
00011         config_node_include(shared_node_list children,
00012                             config_include_kind kind);
00013
00014         token_list get_tokens() const override;
00015
00016         shared_node_list const& children() const;
00017         config_include_kind kind() const;
00018         std::string name() const;
00019
00020     private:

```

```

00022         shared_node_list _children;
00023         config_include_kind _kind;
00024     };
00025
00026 } // namespace hocon

```

## 8.41 config\_node\_object.hpp

```

00001 #pragma once
00002
00003 #include "config_node_complex_value.hpp"
00004 #include "config_node_path.hpp"
00005 #include <hocon/path.hpp>
00006 #include <hocon/config_syntax.hpp>
00007
00008 namespace hocon {
00009
00010     class config_node_object;
00011     using shared_node_object = std::shared_ptr<const config_node_object>;
00012
00013     class config_node_object : public config_node_complex_value {
00014     public:
00015         config_node_object(shared_node_list children);
00016
00017         std::shared_ptr<const config_node_complex_value> new_node(
00018             shared_node_list nodes) const override;
00019
00020         bool has_value(path desired_path) const;
00021
00022         shared_node_object change_value_on_path(path desired_path,
00023             shared_node_value value,
00024             config_syntax flavor) const;
00025
00026         shared_node_object set_value_on_path(std::string desired_path,
00027             shared_node_value value,
00028             config_syntax flavor = config_syntax::CONF) const;
00029
00030         shared_node_object set_value_on_path(config_node_path desired_path,
00031             shared_node_value value,
00032             config_syntax flavor = config_syntax::CONF) const;
00033
00034         shared_node_list indentation() const;
00035
00036         shared_node_object add_value_on_path(config_node_path desired_path,
00037             shared_node_value value,
00038             config_syntax flavor) const;
00039
00040         shared_node_object remove_value_on_path(std::string desired_path, config_syntax flavor) const;
00041
00042         static bool contains_token(shared_node node, token_type token);
00043     };
00044
00045 } // namespace hocon

```

## 8.42 config\_node\_path.hpp

```

00001 #pragma once
00002
00003 #include <internal/nodes/abstract_config_node.hpp>
00004 #include <hocon/path.hpp>
00005 #include <internal/token.hpp>
00006
00007 namespace hocon {
00008
00009     class config_node_path : public abstract_config_node {
00010     public:
00011         config_node_path(path node_path, token_list tokens);
00012
00013         token_list get_tokens() const override;
00014         path get_path() const;
00015
00016         config_node_path sub_path(int to_remove);
00017         config_node_path first();
00018
00019     private:
00020         path _path;
00021         token_list _tokens;
00022     };
00023
00024
00025 } // namespace hocon

```

## 8.43 config\_node\_root.hpp

```

00001 #pragma once
00002
00003 #include "config_node_complex_value.hpp"
00004 #include <hocon/config_syntax.hpp>
00005
00006 namespace hocon {
00007
00008     class config_node_root : public config_node_complex_value {
00009     public:
00010         config_node_root(shared_node_list children, shared_origin origin);
00011
00012         std::shared_ptr<const config_node_complex_value> new_node(shared_node_list nodes) const
00013         override;
00014
00015         std::shared_ptr<const config_node_complex_value> value() const;
00016         std::shared_ptr<const config_node_root> set_value(std::string desired_path,
00017                                                         shared_node_value,
00018                                                         config_syntax flavor) const;
00019
00020         bool has_value(std::string desired_path) const;
00021
00022     private:
00023         shared_origin _origin;
00024     };
00025 } // namespace hocon

```

## 8.44 config\_node\_simple\_value.hpp

```

00001 #pragma once
00002
00003 #include "abstract_config_node_value.hpp"
00004 #include <hocon/config_value.hpp>
00005
00006 namespace hocon {
00007
00008     class config_node_simple_value : public abstract_config_node_value {
00009     public:
00010         config_node_simple_value(shared_token value);
00011
00012         shared_token get_token() const;
00013         shared_value get_value() const;
00014
00015         token_list get_tokens() const override;
00016
00017     private:
00018         shared_token _token;
00019     };
00020 } // namespace hocon

```

## 8.45 config\_node\_single\_token.hpp

```

00001 #pragma once
00002
00003 #include <internal/token.hpp>
00004 #include "abstract_config_node.hpp"
00005
00006 namespace hocon {
00007
00008     class config_node_single_token : public abstract_config_node {
00009     public:
00010         config_node_single_token(shared_token t);
00011
00012         token_list get_tokens() const override;
00013
00014         shared_token get_token() const;
00015
00016     private:
00017         shared_token _token;
00018     };
00019 } // namespace hocon

```

## 8.46 parseable.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_parseable.hpp>
00004 #include <boost/nowide/fstream.hpp>
00005 #include <internal/simple_config_origin.hpp>
00006 #include <hocon/config_object.hpp>
00007 #include <hocon/config_include_context.hpp>
00008
00009 namespace hocon {
00010     class config_document;
00011
00012     class parseable : public config_parseable, public std::enable_shared_from_this<parseable> {
00013     public:
00014         static std::shared_ptr<parseable> new_file(std::string input_file_path, config_parse_options
00015 options);
00016         static std::shared_ptr<parseable> new_string(std::string s, config_parse_options options);
00017         static std::shared_ptr<parseable> new_not_found(std::string what_not_found, std::string
00018 message,
00019                                     config_parse_options options);
00020
00021         static config_syntax syntax_from_extension(std::string name);
00022
00023         void post_construct(config_parse_options const& base_options);
00024
00025         std::shared_ptr<config_document> parse_config_document();
00026         shared_object parse(config_parse_options const& options) const override;
00027         shared_object parse() const;
00028
00029         shared_value parse_value() const;
00030
00031         config_parse_options const& options() const override;
00032         std::shared_ptr<const config_origin> origin() const override;
00033
00034         virtual std::unique_ptr<std::istream> reader(config_parse_options const& options) const;
00035         virtual std::unique_ptr<std::istream> reader() const = 0;
00036         virtual shared_origin create_origin() const = 0;
00037
00038         virtual config_syntax guess_syntax() const;
00039         virtual config_syntax content_type() const;
00040         virtual std::shared_ptr<config_parseable> relative_to(std::string file_name) const;
00041
00042         std::string to_string() const;
00043         std::string get_cur_dir() const;
00044         void set_cur_dir(std::string dir) const;
00045         void separate_filepath(const std::string& path, std::string* file_dir,
00046                               std::string* file_name) const;
00047
00048         // Disable copy constructors, as include_context assumes it can hold a reference to parseable.
00049         parseable() = default;
00050         parseable(parseable const&) = delete;
00051         parseable& operator=(parseable const&) = delete;
00052     private:
00053         std::shared_ptr<config_document> parse_document(config_parse_options const& base_options)
00054 const;
00055         std::shared_ptr<config_document> parse_document(shared_origin origin,
00056                                                         config_parse_options const& final_options)
00057 const;
00058         std::shared_ptr<config_document> raw_parse_document(std::unique_ptr<std::istream> stream,
00059 shared_origin origin,
00060                                                         config_parse_options const& options)
00061 const;
00062         std::shared_ptr<config_document> raw_parse_document(shared_origin origin,
00063                                                         config_parse_options const& options)
00064 const;
00065
00066         shared_value parse_value(config_parse_options const& base_options) const;
00067         shared_value parse_value(shared_origin origin, config_parse_options const& options) const;
00068         shared_value raw_parse_value(std::unique_ptr<std::istream> stream,
00069                                     shared_origin origin,
00070                                     config_parse_options const& options) const;
00071         shared_value raw_parse_value(shared_origin origin, config_parse_options const& options) const;
00072
00073         config_parse_options fixup_options(config_parse_options const& base_options) const;
00074
00075         std::vector<parseable> _parse_stack;
00076
00077         shared_origin _initial_origin;
00078         config_parse_options _initial_options;
00079         shared_include_context _include_context;
00080
00081         static const int MAX_INCLUDE_DEPTH;
00082     };

```

```

00079     class parseable_file : public parseable {
00080     public:
00081         parseable_file(std::string input_file_path, config_parse_options options);
00082         std::unique_ptr<std::istream> reader() const override;
00083         shared_origin create_origin() const override;
00084         config_syntax guess_syntax() const override;
00085     private:
00086         std::string _input;
00087     };
00088
00089     class parseable_string : public parseable {
00090     public:
00091         parseable_string(std::string s, config_parse_options options);
00092         std::unique_ptr<std::istream> reader() const override;
00093         shared_origin create_origin() const override;
00094     private:
00095         std::string _input;
00096     };
00097
00098     // NOTE: this is not a faithful port of the 'ParseableResources' class from the
00099     // upstream, because at least for now we're not going to try to do anything
00100     // crazy like look for files on the ruby load path. However, there is a decent
00101     // chunk of logic elsewhere in the codebase that is written with the assumption
00102     // that this class will provide the 'last resort' attempt to find a config file
00103     // before giving up, so we're basically port just enough to have it provide
00104     // that last resort behavior
00105     class parseable_resources : public parseable {
00106     public:
00107         parseable_resources(std::string resource, config_parse_options options);
00108
00109         std::unique_ptr<std::istream> reader() const override;
00110         shared_origin create_origin() const override;
00111     private:
00112         std::string _resource;
00113     };
00114
00115     // this is a parseable that doesn't exist and just throws when you try to
00116     // parse it
00117     class parseable_not_found : public parseable {
00118     public:
00119         parseable_not_found(std::string what, std::string message, config_parse_options options);
00120
00121         std::unique_ptr<std::istream> reader() const override;
00122         shared_origin create_origin() const override;
00123     private:
00124         std::string _what;
00125         std::string _message;
00126     };
00127
00128 } // namespace hocon

```

## 8.47 path\_builder.hpp

```

00001 #pragma once
00002
00003 #include <hocon/path.hpp>
00004 #include <stack>
00005
00006 namespace hocon {
00007
00008     class path_builder {
00009     public:
00010         void append_key(std::string key);
00011         void append_path(path path_to_append);
00012
00013         path result();
00014     private:
00015         std::stack<std::string> _keys;
00016     };
00017
00018 } // namespace hocon

```

## 8.48 path\_parser.hpp

```

00001 #pragma once

```

```

00002
00003 #include "path_builder.hpp"
00004 #include "simple_config_origin.hpp"
00005 #include "tokenizer.hpp"
00006 #include <hocon/config_syntax.hpp>
00007 #include <internal/nodes/config_node_path.hpp>
00008
00009 #include <string>
00010 #include <vector>
00011
00012 namespace hocon {
00013
00014     class path_parser {
00015     public:
00016         static config_node_path parse_path_node(std::string const& path_string,
00017                                                 config_syntax flavor = config_syntax::CONF);
00018
00019         static path parse_path(std::string const& path_string);
00020
00021         static path parse_path_expression(iterator& expression, shared_origin origin,
00022                                         std::string const& original_text = "",
00023                                         token_list* path_tokens = nullptr,
00024                                         config_syntax flavor = config_syntax::CONF);
00025
00026         static config_node_path parse_path_node_expression(iterator& expression,
00027                                                           shared_origin origin,
00028                                                           std::string const& original_text = "",
00029                                                           config_syntax flavor =
00030                                                           config_syntax::CONF);
00031     private:
00032         class element {
00033         public:
00034             element(std::string initial, bool can_be_empty);
00035
00036             std::string to_string() const;
00037
00038             std::string _value;
00039             bool _can_be_empty;
00040         };
00041
00042         static token_list split_token_on_period(shared_token t, config_syntax flavor);
00043
00044         static void add_path_text(std::vector<element>& buff, bool was_quoted, std::string new_text);
00045
00046         static bool looks_unsafe_for_fast_parser(std::string s);
00047
00048         static path fast_path_build(path tail, std::string s);
00049
00050         static path speculative_fast_parse_path(std::string const& path);
00051
00052         static const shared_origin api_origin;
00053     };
00054
00055 } // namespace hocon

```

## 8.49 replaceable\_merge\_stack.hpp

```

00001 #pragma once
00002
00003 #include <internal/resolve_context.hpp>
00004 #include <internal/container.hpp>
00005
00006 namespace hocon {
00007
00008     // This is a faithful port of the Java ReplaceableMergeStack interface
00009     class replaceable_merge_stack : public container {
00010     public:
00011         virtual shared_value make_replacement(resolve_context const& context, int skipping) const = 0;
00012     };
00013
00014 } // namespace hocon

```

## 8.50 resolve\_context.hpp

```

00001 #pragma once
00002
00003 #include <hocon/types.hpp>
00004 #include <hocon/config_resolve_options.hpp>

```



```

00005 #include <hocon/path.hpp>
00006
00007 #include <unordered_map>
00008
00009 namespace hocon {
00010
00011     class resolve_source;
00012
00013     template<typename T>
00014     struct resolve_result;
00015
00016     class resolve_context {
00017     public:
00018         resolve_context(config_resolve_options options, path restrict_to_child,
00019             std::vector<shared_value> cycle_markers);
00019         resolve_context(config_resolve_options options, path restrict_to_child);
00020         bool is_restricted_to_child() const;
00021         config_resolve_options options() const;
00022
00023         resolve_result<shared_value> resolve(shared_value original, resolve_source const& source)
00024         const;
00025         path restrict_to_child() const;
00026
00027         resolve_context add_cycle_marker(shared_value value) const;
00028         resolve_context remove_cycle_marker(shared_value value);
00029         resolve_context restrict(path restrict_to) const;
00030         resolve_context unrestricted() const;
00031
00032         static shared_value resolve(shared_value value, shared_object root, config_resolve_options
00033         options);
00034
00035     private:
00036         struct memo_key {
00037             shared_value value;
00038             path restrict_to_child;
00039             bool operator==(const memo_key& other) const {
00040                 return value == other.value && restrict_to_child == other.restrict_to_child;
00041             }
00042         };
00043
00044         struct memo_key_hash {
00045             std::size_t operator()(const memo_key&) const;
00046         };
00047         using resolve_memos = std::unordered_map<memo_key, shared_value, memo_key_hash>;
00048         config_resolve_options _options;
00049         path _restrict_to_child;
00050         resolve_memos _memos;
00051         std::vector<shared_value> _cycle_markers;
00052
00053         resolve_context memoize(const memo_key& key, const shared_value& value) const;
00054     };
00055 } // namespace hocon

```

## 8.51 resolve\_result.hpp

```

00001 #pragma once
00002 #include <internal/resolve_context.hpp>
00003 #include <memory>
00004
00005 namespace hocon {
00006
00007     template<typename V>
00008     struct resolve_result {
00009         resolve_result(resolve_context c, V v) :
00010             context(std::move(c)), value(std::move(v)) {}
00011
00012         resolve_context context;
00013         V value;
00014     };
00015
00016     template<typename T>
00017     static resolve_result<shared_value> make_resolve_result(resolve_context context, T value) {
00018         return resolve_result<shared_value>(std::move(context), std::move(value));
00019     }
00020
00021 } // namespace hocon

```

## 8.52 resolve\_source.hpp

```

00001 #pragma once

```

```

00002
00003 #include <memory>
00004 #include <list>
00005 #include <hocon/types.hpp>
00006 #include <internal/resolve_result.hpp>
00007 #include <hocon/config_exception.hpp>
00008
00009 namespace hocon {
00010
00011     class container;
00012     class resolve_context;
00013     class substitution_expression;
00014
00015     class resolve_source {
00016     public:
00017         typedef std::list<std::shared_ptr<const container> > node;
00018
00019         struct result_with_path {
00020             resolve_result<shared_value> result;
00021             node path_from_root;
00022
00023             result_with_path(resolve_result<shared_value> result_value, node path_from_root_value);
00024         };
00025
00026         resolve_source(shared_object root);
00027         resolve_source(shared_object root, node path_from_root);
00028         resolve_source push_parent(std::shared_ptr<const container> parent) const;
00029         result_with_path lookup_subst(resolve_context context,
std::shared_ptr<substitution_expression> subst, int prefix_length) const;
00030
00031         resolve_source replace_current_parent(std::shared_ptr<const container> old,
std::shared_ptr<const container> replacement) const;
00032         resolve_source replace_within_current_parent(shared_value old, shared_value replacement)
const;
00033         resolve_source reset_parents() const;
00034
00035     private:
00036         struct value_with_path {
00037             shared_value value;
00038             node path_from_root;
00039
00040             value_with_path(shared_value v, node path_from_root_value);
00041         };
00042
00043         shared_object _root;
00044         node _path_from_root;
00045
00046         static value_with_path find_in_object(shared_object obj, path the_path);
00047         static result_with_path find_in_object(shared_object obj, resolve_context context, path
the_path);
00048         static value_with_path find_in_object(shared_object obj, path the_path, node parents);
00049         static not_resolved_exception improve_not_resolved(path what, not_resolved_exception const&
original);
00050
00051         shared_object root_must_be_obj(std::shared_ptr<const container> value) const;
00052
00053         static node replace(const node& list, std::shared_ptr<const container> old, shared_value
replacement);
00054     };
00055 } // namespace hocon

```

## 8.53 simple\_config\_document.hpp

```

00001 #pragma once
00002
00003 #include <hocon/parser/config_document.hpp>
00004 #include <internal/nodes/config_node_root.hpp>
00005 #include <hocon/config_parse_options.hpp>
00006 #include <memory>
00007
00008 namespace hocon {
00009
00010     class simple_config_document : public config_document {
00011     public:
00012         simple_config_document(std::shared_ptr<const config_node_root> root,
config_parse_options opts);
00013
00014
00015         std::unique_ptr<config_document> with_value_text(std::string path, std::string new_value)
const override;
00016         std::unique_ptr<config_document> with_value(std::string path,
std::shared_ptr<config_value> new_value) const
override;
00017
00018         std::unique_ptr<config_document> without_path(std::string path) const override;

```

```

00019
00020     bool has_path(std::string const& path) const override;
00021
00022     std::string render() const override;
00023
00024     private:
00025         std::shared_ptr<const config_node_root> _config_node_tree;
00026         config_parse_options _parse_options;
00027     };
00028 }

```

## 8.54 simple\_config\_origin.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_origin.hpp>
00004
00005 #include <string>
00006 #include <vector>
00007 #include <memory>
00008
00009 namespace hocon {
00010
00011     enum class origin_type { GENERIC, FILE, RESOURCE };
00012
00013     class simple_config_origin : public config_origin, public
00014         std::enable_shared_from_this<simple_config_origin> {
00015     public:
00016         simple_config_origin(std::string description, int line_number, int end_line_number,
00017             origin_type org_type, std::string resource_or_null, std::vector<std::string>
00018             comments_or_null);
00019
00019         simple_config_origin(std::string description, int line_number = -1, int end_line_number = -1,
00020             origin_type org_type = origin_type::GENERIC);
00021
00022         int line_number() const override;
00023
00024         std::string const& description() const override;
00025         std::vector<std::string> const& comments() const override;
00026
00031         shared_origin with_line_number(int line_number) const override;
00032
00033         shared_origin with_comments(std::vector<std::string> comments) const override;
00034         std::shared_ptr<const simple_config_origin> append_comments(std::vector<std::string> comments)
00035         const;
00035         std::shared_ptr<const simple_config_origin> prepend_comments(std::vector<std::string>
00036         comments) const;
00036
00037         static shared_origin merge_origins(shared_origin a, shared_origin b);
00038         static shared_origin merge_origins(std::vector<shared_value> const& stack);
00039         static shared_origin merge_origins(std::vector<shared_origin> const& stack);
00040
00041         bool operator==(const simple_config_origin &other) const;
00042         bool operator!=(const simple_config_origin &other) const;
00043
00044     private:
00045         static std::shared_ptr<const simple_config_origin> merge_two(std::shared_ptr<const
00046         simple_config_origin> a,
00047             std::shared_ptr<const
00048         simple_config_origin> b);
00047
00048         // this picks the best pair to merge, because the pair has the most in
00049         // common. we want to merge two lines in the same file rather than something
00050         // else with one of the lines; because two lines in the same file can be
00051         // better consolidated.
00052         static std::shared_ptr<const simple_config_origin> merge_three(std::shared_ptr<const
00053         simple_config_origin> a,
00054             std::shared_ptr<const
00055         simple_config_origin> b,
00056             std::shared_ptr<const
00057         simple_config_origin> c);
00055
00056         static int similarity(std::shared_ptr<const simple_config_origin> a,
00057             std::shared_ptr<const simple_config_origin> b);
00058
00059         std::string _description;
00060         int _line_number;
00061         int _end_line_number;
00062         origin_type _origin_type;
00063         std::string _resource_or_null;
00064         std::vector<std::string> _comments_or_null;
00065     };
00066
00067 } // namespace hocon

```

## 8.55 simple\_include\_context.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_include_context.hpp>
00004 #include "parseable.hpp"
00005
00006 namespace hocon {
00007
00008     class simple_include_context : public config_include_context {
00009     public:
00010         // Include context is part of a parseable, so it can always expect a valid parseable
00011         // reference.
00012         simple_include_context(parseable const& parseable);
00013
00014         // Unused method
00015         // shared_include_context with_parseable(weak_parseable new_parseable) const;
00016
00017         shared_parseable relative_to(std::string file_name) const override;
00018         config_parse_options parse_options() const override;
00019
00020     private:
00021         parseable const& _parseable;
00022     };
00023 } // namespace hocon

```

## 8.56 simple\_includer.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_includer.hpp>
00004 #include <hocon/config_includer_file.hpp>
00005 #include <hocon/config_parse_options.hpp>
00006 #include <internal/full_includer.hpp>
00007
00008 namespace hocon {
00009
00010     class name_source;
00011
00012     class simple_includer : public config_includer, public config_includer_file, public
00013     std::enable_shared_from_this<simple_includer> {
00014     public:
00015         simple_includer(shared_includer fallback);
00016
00017         shared_includer with_fallback(shared_includer fallback) const override;
00018
00019         shared_object include(shared_include_context context, std::string what) const override;
00020
00021         shared_object include_without_fallback(shared_include_context context, std::string what)
00022         const;
00023
00024         shared_object include_file(shared_include_context context, std::string what) const override;
00025
00026         static shared_object include_file_without_fallback(shared_include_context context, std::string
00027         what);
00028
00029         static config_parse_options clear_for_include(config_parse_options const& options);
00030
00031         static shared_object from_basename(std::shared_ptr<name_source> source,
00032         std::string name,
00033         config_parse_options options);
00034
00035         static std::shared_ptr<const full_includer> make_full(std::shared_ptr<const config_includer>
00036         includer);
00037
00038     private:
00039         shared_includer _fallback;
00040
00041         // the Proxy is a proxy for an application-provided includer that uses our
00042         // default implementations when the application-provided includer doesn't
00043         // have an implementation.
00044         class proxy : public full_includer, public std::enable_shared_from_this<proxy> {
00045         public:
00046             proxy(std::shared_ptr<const config_includer> delegate);
00047
00048             shared_includer with_fallback(shared_includer fallback) const;
00049
00050             shared_object include(shared_include_context context, std::string what) const;
00051
00052             shared_object include_file(shared_include_context context, std::string what) const;
00053
00054             static std::shared_ptr<const full_includer> make_full(shared_includer includer);
00055         };
00056     };

```

```

00052     private:
00053         std::shared_ptr<const config_includer> _delegate;
00054     };
00055 };
00056
00057 class name_source {
00058 public:
00059     name_source(shared_include_context context) : _context(move(context)) {
00060         if (nullptr != _context) {
00061             _context_initialized = true;
00062         } else {
00063             _context_initialized = false;
00064         }
00065     }
00066     name_source() : name_source(nullptr) {}
00067     virtual shared_parseable name_to_parseable(std::string name,
00068                                               config_parse_options parse_options) const = 0;
00069
00070     void set_context(shared_include_context context) {
00071         if (!_context_initialized) {
00072             _context_initialized = true;
00073             _context = context;
00074         }
00075     }
00076
00077     shared_include_context get_context() const {
00078         return _context;
00079     }
00080
00081     bool context_initialized() const {
00082         return _context_initialized;
00083     }
00084
00085     private:
00086         shared_include_context _context;
00087         bool _context_initialized;
00088     };
00089
00090 class relative_name_source : public name_source {
00091 public:
00092     relative_name_source(shared_include_context context);
00093
00094     shared_parseable name_to_parseable(std::string name,
00095                                       config_parse_options parse_options) const override;
00096 };
00097
00098 class file_name_source : public name_source {
00099 public:
00100     file_name_source();
00101
00102     file_name_source(shared_include_context context);
00103
00104     shared_parseable name_to_parseable(std::string name,
00105                                       config_parse_options parse_options) const override;
00106 };
00107
00108 } // namespace hocon

```

## 8.57 substitution\_expression.hpp

```

00001 #pragma once
00002
00003 #include <string>
00004 #include <memory>
00005 #include <hocon/path.hpp>
00006
00007 namespace hocon {
00008
00009     class substitution_expression : public std::enable_shared_from_this<substitution_expression> {
00010     public:
00011         substitution_expression(path the_path, bool optional);
00012
00013         path get_path() const;
00014         bool optional() const;
00015
00016         std::shared_ptr<substitution_expression> change_path(path new_path);
00017
00018         std::string to_string() const;
00019
00020         bool operator==(substitution_expression const& other) const;
00021
00022     private:
00023         const path _path;

```

```

00024         const bool _optional;
00025     };
00026
00027 } // namespace hocon
00028

```

## 8.58 token.hpp

```

00001 #pragma once
00002
00003 #include "simple_config_origin.hpp"
00004
00005 #include <string>
00006
00007 namespace hocon {
00008
00009     enum class token_type {
00010         START, END, COMMA, EQUALS, COLON, OPEN_CURLY, CLOSE_CURLY, OPEN_SQUARE, CLOSE_SQUARE,
00011         VALUE, NEWLINE, UNQUOTED_TEXT, IGNORED_WHITESPACE, SUBSTITUTION, PROBLEM, COMMENT, PLUS_EQUALS
00012     };
00013
00014     struct unsupported_exception : std::runtime_error {
00015         explicit unsupported_exception(std::string const& message);
00016     };
00017
00018     class token {
00019     public:
00020         token(token_type type, shared_origin origin = nullptr,
00021             std::string token_text = "", std::string debug_string = "");
00022
00023         virtual token_type get_token_type() const;
00024         virtual std::string token_text() const;
00025         virtual std::string to_string() const;
00026         virtual shared_origin const& origin() const;
00027
00028         int line_number() const;
00029
00030         virtual bool operator==(const token& other) const;
00031
00032     private:
00033         token_type _token_type;
00034
00035         shared_origin _origin;
00036
00037         std::string _token_text;
00038         std::string _debug_string;
00039     };
00040
00041     using shared_token = std::shared_ptr<const token>;
00042     using token_list = std::vector<shared_token>;
00043
00044 } // namespace hocon
00045

```

## 8.59 tokenizer.hpp

```

00001 #pragma once
00002
00003 #include "tokens.hpp"
00004 #include "hocon/config_exception.hpp"
00005 #include <hocon/config_syntax.hpp>
00006
00007 #include <boost/nowide/fstream.hpp>
00008 #include <vector>
00009 #include <queue>
00010 #include <string>
00011
00012 namespace hocon {
00013
00014     // This exception should not leave this file
00015     class problem_exception : std::runtime_error {
00016     public:
00017         problem_exception(problem prob);
00018         problem const& get_problem() const;
00019
00020     private:
00021         problem _problem;
00022     };
00023
00024     class iterator {

```

```

00025     public:
00026         virtual bool has_next() = 0;
00027         virtual shared_token next() = 0;
00028     };
00029
00030     template <typename iter>
00031     class iterator_wrapper : public iterator {
00032     public:
00033         iterator_wrapper(iter begin, iter end)
00034             : _cur(begin), _end(end) { }
00035
00036         bool has_next() override {
00037             return _cur != _end;
00038         }
00039
00040         shared_token next() override {
00041             return *_cur++;
00042         }
00043
00044     private:
00045         iter _cur;
00046         iter _end;
00047     };
00048
00049     class token_iterator : public iterator {
00050     public:
00051         token_iterator(shared_origin origin, std::unique_ptr<std::istream> input, bool
allow_comments);
00052         token_iterator(shared_origin origin, std::unique_ptr<std::istream> input, config_syntax
flavor);
00053
00054         bool has_next() override;
00055         shared_token next() override;
00056
00057         static std::string render(token_list tokens);
00058
00059     private:
00060         class whitespace_saver {
00061         public:
00062             whitespace_saver();
00063             void add(char c);
00064             shared_token check(token_type type, shared_origin base_origin, int line_number);
00065
00066         private:
00067             shared_token next_is_not_simple_value(shared_origin base_origin, int line_number);
00068             shared_token next_is_simple_value(shared_origin origin, int line_number);
00069             shared_token create_whitespace_token(shared_origin base_origin, int line_number);
00070
00071             std::string _whitespace;
00072             bool _last_token_was_simple_value;
00073         };
00074
00075         bool start_of_comment(char c);
00076         shared_token pull_comment(char first_char);
00077
00078         char next_char_after_whitespace(whitespace_saver& saver);
00079
00080         shared_token pull_unquoted_text();
00081
00082         shared_token pull_number(char first_char);
00083
00084         void pull_escape_sequence(std::string& parsed, std::string& original);
00085
00086         void append_triple_quoted_string(std::string& parsed, std::string& original);
00087
00088         shared_token pull_quoted_string();
00089
00090         shared_token const& pull_plus_equals();
00091         shared_token pull_substitution();
00092         shared_token pull_next_token(whitespace_saver& saver);
00093         void queue_next_token();
00094
00095         static bool is_simple_value(token_type type);
00096         static std::string as_string(char c);
00097         static shared_origin line_origin(shared_origin base_origin, int line_number);
00098
00099         shared_origin _origin;
00100         std::unique_ptr<std::istream> _input;
00101         bool _allow_comments;
00102         int _line_number;
00103         shared_origin _line_origin;
00104         std::queue<shared_token> _tokens;
00105         whitespace_saver _whitespace_saver;
00106     };
00107
00108     class single_token_iterator : public iterator {
00109     public:

```

```

00121         single_token_iterator(shared_token token);
00122
00123         bool has_next() override;
00124         shared_token next() override;
00125
00126     private:
00127         shared_token _token;
00128         bool _has_next;
00129     };
00130
00131     class token_list_iterator : public iterator {
00132     public:
00133         token_list_iterator(token_list tokens);
00134
00135         bool has_next() override;
00136         shared_token next() override;
00137
00138     private:
00139         token_list _tokens;
00140         int _index;
00141     };
00142
00143 } // namespace hocon

```

## 8.60 tokens.hpp

```

00001 #pragma once
00002
00003 #include "token.hpp"
00004 #include <hocon/config_value.hpp>
00005
00006 namespace hocon {
00007
00008     class value : public token {
00009     public:
00010         value(shared_value value);
00011         value(shared_value value, std::string original_text);
00012
00013         std::string to_string() const override;
00014         shared_origin const& origin() const override;
00015
00016         shared_value get_value() const;
00017
00018         bool operator==(const token& other) const override;
00019
00020     private:
00021         shared_value _value;
00022     };
00023
00024     class line : public token {
00025     public:
00026         line(shared_origin origin);
00027
00028         std::string to_string() const override;
00029
00030         bool operator==(token const& other) const override;
00031     };
00032
00033     class unquoted_text : public token {
00034     public:
00035         unquoted_text(shared_origin origin, std::string text);
00036
00037         std::string to_string() const override;
00038
00039         bool operator==(const token& other) const override;
00040     };
00041
00042     class ignored_whitespace : public token {
00043     public:
00044         ignored_whitespace(shared_origin origin, std::string whitespace);
00045
00046         std::string to_string() const override;
00047
00048         bool operator==(const token& other) const override;
00049     };
00050
00051     class problem : public token {
00052     public:
00053         problem(shared_origin origin, std::string what, std::string message, bool suggest_quotes);
00054
00055         std::string what() const;
00056         std::string message() const;
00057         bool suggest_quotes() const;

```



```

00058
00059     std::string to_string() const override;
00060
00061     bool operator==(const token& other) const override;
00062
00063     private:
00064         std::string _what;
00065         std::string _message;
00066         bool _suggest_quotes;
00067     };
00068
00069     class comment : public token {
00070     public:
00071         comment(shared_origin origin, std::string text);
00072
00073         std::string text() const;
00074
00075         std::string to_string() const override;
00076         bool operator==(const token& other) const override;
00077
00078     private:
00079         std::string _text;
00080     };
00081
00082     class double_slash_comment : public comment {
00083     public:
00084         double_slash_comment(shared_origin origin, std::string text);
00085
00086         std::string token_text() const override;
00087     };
00088
00089     class hash_comment : public comment {
00090     public:
00091         hash_comment(shared_origin origin, std::string text);
00092
00093         std::string token_text() const override;
00094     };
00095
00096     class substitution : public token {
00097     public:
00098         substitution(shared_origin origin, bool optional, token_list expression);
00099
00100         bool optional() const;
00101         token_list const& expression() const;
00102
00103         std::string token_text() const override;
00104         std::string to_string() const override;
00105
00106         bool operator==(const token& other) const override;
00107
00108     private:
00109         bool _optional;
00110         token_list _expression;
00111     };
00112
00113     class tokens {
00114     public:
00116         static shared_token const& start_token();
00117         static shared_token const& end_token();
00118         static shared_token const& comma_token();
00119         static shared_token const& equals_token();
00120         static shared_token const& colon_token();
00121         static shared_token const& open_curly_token();
00122         static shared_token const& close_curly_token();
00123         static shared_token const& open_square_token();
00124         static shared_token const& close_square_token();
00125         static shared_token const& plus_equals_token();
00126
00127         static bool is_newline(shared_token);
00128         static bool is_ignored_whitespace(shared_token);
00129
00130         static bool is_value_with_type(shared_token t, config_value::type type);
00131
00132         static shared_value get_value(shared_token t);
00133     };
00134
00135 } // namespace hocon

```

## 8.61 unmergeable.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>

```

```

00004 #include <vector>
00005
00006 namespace hocon {
00007
00014     class unmergeable {
00015     public:
00016         virtual std::vector<shared_value> unmerged_values() const = 0;
00017     };
00018
00019 } // namespace hocon
00020

```

## 8.62 config\_boolean.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004
00005 namespace hocon {
00006
00007     class config_boolean : public config_value {
00008     public:
00009         config_boolean(shared_origin origin, bool value);
00010
00011         config_value::type value_type() const override;
00012         std::string transform_to_string() const override;
00013
00014         unwrapped_value unwrapped() const override;
00015
00016         bool bool_value() const;
00017         bool operator==(config_value const& other) const override;
00018
00019     protected:
00020         shared_value new_copy(shared_origin) const override;
00021
00022     private:
00023         bool _value;
00024     };
00025 } // namespace hocon;
00026

```

## 8.63 config\_concatenation.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004 #include <internal/unmergeable.hpp>
00005 #include <internal/container.hpp>
00006 #include <string>
00007 #include <vector>
00008
00009 namespace hocon {
00010
00011     struct config_exception;
00012
00024     class config_concatenation : public config_value, public unmergeable, public container {
00025     public:
00026         config_concatenation(shared_origin origin, std::vector<shared_value> pieces);
00027
00028         config_value::type value_type() const override;
00029         std::vector<shared_value> unmerged_values() const override;
00030
00031         resolve_status get_resolve_status() const override;
00032
00033         shared_value replace_child(shared_value const& child, shared_value replacement) const
00034         override;
00035         bool has_descendant(shared_value const& descendant) const override;
00036         resolve_result<shared_value> resolve_substitutions(resolve_context const& context,
00037         resolve_source const& source) const override;
00038
00039         static std::vector<shared_value> consolidate(std::vector<shared_value> pieces);
00040         static shared_value concatenate(std::vector<shared_value> pieces);
00041         shared_value relativized(std::string prefix) const override;
00042
00043         unwrapped_value unwrapped() const override;
00044
00045         bool operator==(config_value const& other) const override;
00046
00047     protected:
00048

```

```

00046     shared_value new_copy(shared_origin origin) const override;
00047     bool ignores_fallbacks() const override;
00048     void render(std::string& result, int indent, bool at_root, config_render_options options)
const override;
00049
00050     private:
00051         std::vector<shared_value> _pieces;
00052
00053         config_exception not_resolved() const;
00054         static bool is_ignored_whitespace(shared_value value);
00055         static void join(std::vector<shared_value> & builder, shared_value right);
00056     };
00057
00058 } // namespace hocon
00059

```

## 8.64 config\_delayed\_merge.hpp

```

00001 #include <hocon/config_value.hpp>
00002 #include <internal/config_util.hpp>
00003 #include <internal/unmergeable.hpp>
00004 #include <internal/replaceable_merge_stack.hpp>
00005 #include <vector>
00006
00007 #pragma once
00008
00009 namespace hocon {
00010
00011     class config_delayed_merge : public config_value, public unmergeable, public
replaceable_merge_stack {
00012     public:
00013         config_delayed_merge(shared_origin origin, std::vector<shared_value> stack);
00014
00015         config_value::type value_type() const override;
00016
00017         shared_value make_replacement(resolve_context const& context, int skipping) const override;
00018
00019         // static method also used by ConfigDelayedMergeObject; end may be null
00020         static shared_value make_replacement(resolve_context const& context,
std::vector<shared_value> stack,
int skipping);
00021
00022         std::vector<shared_value> unmerged_values() const override;
00023
00024         unwrapped_value unwrapped() const override;
00025
00026         resolve_result<shared_value> resolve_substitutions(resolve_context const& context,
resolve_source const& source) const override;
00027
00028         static resolve_result<shared_value> resolve_substitutions(std::shared_ptr<const
replaceable_merge_stack> replaceable, const std::vector<shared_value>& _stack, resolve_context const&
context, resolve_source const& source);
00029
00030         resolve_status get_resolve_status() const override { return resolve_status::UNRESOLVED; }
00031
00032         bool operator==(config_value const& other) const override;
00033
00034         shared_value replace_child(shared_value const& child, shared_value replacement) const
override;
00035
00036         bool has_descendant(shared_value const& descendant) const override;
00037
00038         static void render(std::vector<shared_value> const& stack, std::string& s, int indent_value,
bool at_root, std::string const& at_key, config_render_options options);
00039
00040     protected:
00041         shared_value new_copy(shared_origin) const override;
00042
00043         bool ignores_fallbacks() const override;
00044
00045         virtual void render(std::string& result, int indent, bool at_root, std::string const& at_key,
config_render_options options) const override;
00046         virtual void render(std::string& result, int indent, bool at_root, config_render_options
options) const override;
00047
00048     private:
00049         std::vector<shared_value> _stack;
00050     };
00051
00052 } // namespace hocon::config_delayed_merge
00053

```

## 8.65 config\_delayed\_merge\_object.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_object.hpp>
00004 #include <hocon/config_exception.hpp>
00005 #include <internal/replaceable_merge_stack.hpp>
00006 #include <internal/values/config_delayed_merge.hpp>
00007
00008 namespace hocon {
00009
00010     class config_delayed_merge_object : public config_object, public unmergeable, public
00011         replaceable_merge_stack {
00012     public:
00013         config_delayed_merge_object(shared_origin origin, std::vector<shared_value> const& stack);
00014
00015         resolve_result<shared_value> resolve_substitutions(resolve_context const& context,
00016             resolve_source const& source) const override;
00017         std::vector<shared_value> unmerged_values() const override;
00018         shared_value make_replacement(resolve_context const& context, int skipping) const override;
00019
00020         shared_object with_value(path raw_path, shared_value value) const override;
00021         shared_object with_value(std::string key, shared_value value) const override;
00022
00023         resolve_status get_resolve_status() const override { return resolve_status::UNRESOLVED; }
00024
00025         std::vector<std::string> key_set() const override { throw not_resolved(); }
00026
00027         // map interface
00028         bool is_empty() const override { throw not_resolved(); }
00029         size_t size() const override { throw not_resolved(); }
00030         shared_value operator[](std::string const& key) const override { throw not_resolved(); }
00031         shared_value get(std::string const& key) const override { throw not_resolved(); }
00032         iterator begin() const override { throw not_resolved(); }
00033         iterator end() const override { throw not_resolved(); }
00034         unwrapped_value unwrapped() const override;
00035
00036         bool operator==(config_value const& other) const override;
00037
00038         // container interface
00039         shared_value replace_child(shared_value const& child, shared_value replacement) const
00040         override;
00041         bool has_descendant(shared_value const& descendant) const override;
00042
00043     protected:
00044         shared_value attempt_peek_with_partial_resolve(std::string const& key) const override;
00045         std::unordered_map<std::string, shared_value> const& entry_set() const override;
00046         shared_object without_path(path raw_path) const override;
00047         shared_object with_only_path(path raw_path) const override;
00048         shared_object with_only_path_or_null(path raw_path) const override;
00049         shared_object new_copy(resolve_status const& status, shared_origin origin) const override;
00050         bool ignores_fallbacks() const override;
00051         virtual void render(std::string& result, int indent, bool at_root, std::string const& at_key,
00052             config_render_options options) const override;
00053         virtual void render(std::string& result, int indent, bool at_root, config_render_options
00054             options) const override;
00055
00056     private:
00057         not_resolved_exception not_resolved() const;
00058         const std::vector<shared_value> _stack;
00059     };
00060 } // namespace hocon::config_delayed_merge_object
00061

```

## 8.66 config\_double.hpp

```

00001 #pragma once
00002
00003 #include "config_number.hpp"
00004 #include <internal/simple_config_origin.hpp>
00005
00006 #include <string>
00007
00008 namespace hocon {
00009
00010     class config_double : public config_number {
00011     public:
00012         config_double(shared_origin origin, double value, std::string original_text);
00013
00014         std::string transform_to_string() const override;
00015

```

```

00015
00016         unwrapped_value unwrapped() const override;
00017
00018         int64_t long_value() const override;
00019         double double_value() const override;
00020
00021     protected:
00022         shared_value new_copy(shared_origin) const override;
00023
00024     private:
00025         double _value;
00026     };
00027
00028 } // namespace hocon

```

## 8.67 config\_int.hpp

```

00001 #pragma once
00002
00003 #include "config_number.hpp"
00004
00005 namespace hocon {
00006
00007     class config_int : public config_number {
00008     public:
00009         config_int(shared_origin origin, int value, std::string original_text);
00010
00011         std::string transform_to_string() const override;
00012
00013         unwrapped_value unwrapped() const override;
00014
00015         int64_t long_value() const override;
00016         double double_value() const override;
00017
00018     protected:
00019         shared_value new_copy(shared_origin) const override;
00020
00021     private:
00022         int _value;
00023     };
00024
00025 }

```

## 8.68 config\_long.hpp

```

00001 #pragma once
00002
00003 #include "config_number.hpp"
00004 #include <internal/simple_config_origin.hpp>
00005
00006 #include <string>
00007
00008 namespace hocon {
00009
00010     class config_long : public config_number {
00011     public:
00012         config_long(shared_origin origin, int64_t value, std::string original_text);
00013
00014         std::string transform_to_string() const override;
00015
00016         unwrapped_value unwrapped() const override;
00017
00018         int64_t long_value() const override;
00019         double double_value() const override;
00020
00021     protected:
00022         shared_value new_copy(shared_origin) const override;
00023
00024     private:
00025         int64_t _value;
00026     };
00027
00028 } // namespace hocon

```

## 8.69 config\_null.hpp

```

00001 #pragma once

```

```

00002
00003 #include <hocon/config_value.hpp>
00004 #include <internal/simple_config_origin.hpp>
00005
00006 #include <string>
00007
00008 namespace hocon {
00009
00017     class config_null : public config_value {
00018     public:
00019         config_null(shared_origin origin);
00020
00021         config_value::type value_type() const override;
00022         std::string transform_to_string() const override;
00023
00024         unwrapped_value unwrapped() const override;
00025
00026         bool operator==(config_value const& other) const override;
00027
00028     protected:
00029         shared_value new_copy(shared_origin) const override;
00030         void render(std::string& result, int indent, bool at_root, config_render_options options)
00031             const override;
00032     };
00033 } // namespace hocon

```

## 8.70 config\_number.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004 #include <internal/simple_config_origin.hpp>
00005
00006 #include <string>
00007
00008 namespace hocon {
00009
00010     class config_number : public config_value {
00011     public:
00012         config_number(shared_origin origin,
00013             std::string original_text);
00014
00015         std::string transform_to_string() const override;
00016         config_value::type value_type() const override;
00017
00018         virtual int64_t long_value() const = 0;
00019         virtual double double_value() const = 0;
00020         bool is_whole() const;
00021
00022         bool operator==(const config_number &other) const;
00023         bool operator!=(const config_number &other) const;
00024         bool operator==(config_value const& other) const override;
00025
00026         int int_value_range_checked(std::string const& path) const;
00027
00028         static std::shared_ptr<config_number> new_number(
00029             shared_origin origin, int64_t value, std::string original_text);
00030
00031         static std::shared_ptr<config_number> new_number(
00032             shared_origin origin, double value, std::string original_text);
00033
00034     protected:
00035         std::string _original_text;
00036     };
00037
00038 } // namespace hocon

```

## 8.71 config\_reference.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004 #include <internal/unmergeable.hpp>
00005
00006 namespace hocon {
00007
00008     class substitution_expression;
00009

```

```

00010     class config_reference : public config_value, public unmergeable {
00011     public:
00012         config_reference(shared_origin origin, std::shared_ptr<substitution_expression> expr, int
prefix_length = 0);
00013
00019         type value_type() const override;
00020         std::vector<shared_value> unmerged_values() const override;
00021         resolve_status get_resolve_status() const override;
00022         unwrapped_value unwrapped() const override;
00023
00024         std::shared_ptr<substitution_expression> expression() const;
00025
00026         bool operator==(config_value const& other) const override;
00027
00028     protected:
00029         shared_value new_copy(shared_origin origin) const override;
00030         resolve_result<shared_value> resolve_substitutions(resolve_context const& context,
resolve_source const& source) const override;
00031         bool ignores_fallbacks() const override { return false; }
00032         void render(std::string& s, int indent, bool at_root, config_render_options options) const
override;
00033
00034     private:
00035         std::shared_ptr<substitution_expression> _expr;
00036         int _prefix_length;
00037     };
00038 }

```

## 8.72 config\_string.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004 #include <internal/config_util.hpp>
00005
00006 namespace hocon {
00007
00008     enum class config_string_type { QUOTED, UNQUOTED };
00009
00010     class config_string : public config_value {
00011     public:
00012         config_string(shared_origin origin, std::string text, config_string_type quoted);
00013
00014         config_value::type value_type() const override;
00015         std::string transform_to_string() const override;
00016
00017         unwrapped_value unwrapped() const override;
00018
00019         bool was_quoted() const;
00020         bool operator==(config_value const& other) const override;
00021
00022     protected:
00023         shared_value new_copy(shared_origin) const override;
00024
00025         void render(std::string& s, int indent, bool at_root, config_render_options options) const
override;
00026
00027     private:
00028         std::string _text;
00029         config_string_type _quoted;
00030     };
00031
00032 } // namespace hocon

```

## 8.73 simple\_config\_list.hpp

```

00001 #pragma once
00002
00003 #include <hocon/config_value.hpp>
00004 #include <hocon/config_list.hpp>
00005 #include <hocon/config_render_options.hpp>
00006 #include <hocon/config_exception.hpp>
00007 #include <internal/container.hpp>
00008 #include <algorithm>
00009 #include <memory>
00010 #include <vector>
00011 #include <boost/optional.hpp>
00012
00013 namespace hocon {

```

```

00014
00015     class simple_config_list : public config_list, public container {
00016     public:
00017         simple_config_list(shared_origin origin, std::vector<shared_value> value);
00018         simple_config_list(shared_origin origin, std::vector<shared_value> value, resolve_status
status);
00019
00020         config_value::type value_type() const override { return config_value::type::LIST; }
00021         resolve_status get_resolve_status() const override { return _resolved; }
00022
00023         shared_value replace_child(shared_value const& child, shared_value replacement) const
override;
00024         bool has_descendant(shared_value const& descendant) const override;
00025
00026         shared_value relativized(const std::string prefix) const override;
00027
00028         bool contains(shared_value v) const { return std::find(_value.begin(), _value.end(), v) !=
_value.end(); }
00029         bool contains_all(std::vector<shared_value>) const;
00030
00031         int index_of(shared_value v) {
00032             auto pos = find(_value.begin(), _value.end(), v);
00033             if (pos == _value.end()) {
00034                 return -1;
00035             } else {
00036                 return pos - _value.begin();
00037             }
00038         }
00039
00040         // list interface
00041         bool is_empty() const override { return _value.empty(); }
00042         size_t size() const override { return _value.size(); }
00043         shared_value operator[](size_t index) const override { return _value.at(index); }
00044         shared_value get(size_t index) const override { return _value.at(index); }
00045         iterator begin() const override { return _value.begin(); }
00046         iterator end() const override { return _value.end(); }
00047
00048         std::shared_ptr<const simple_config_list> concatenate(std::shared_ptr<const
simple_config_list> other) const;
00049
00050         unwrapped_value unwrapped() const override;
00051
00052         bool operator==(config_value const& other) const override;
00053
00054     protected:
00055         resolve_result<shared_value>
00056         resolve_substitutions(resolve_context const& context, resolve_source const& source) const
override;
00057         shared_value new_copy(shared_origin origin) const override;
00058
00059         void render(std::string& result, int indent, bool at_root, config_render_options options)
const override;
00060
00061     private:
00062         static const long _serial_version_UID = 2L;
00063         const std::vector<shared_value> _value;
00064         const resolve_status _resolved;
00065
00066         std::shared_ptr<const simple_config_list>
00067         modify(no_exceptions_modifier& modifier, boost::optional<resolve_status> new_resolve_status)
const;
00068
00069         std::shared_ptr<const simple_config_list>
00070         modify_may_throw(modifier& modifier, boost::optional<resolve_status> new_resolve_status)
const;
00071
00072         struct resolve_modifier;
00073     };
00074
00075 } // namespace hocon

```

## 8.74 simple\_config\_object.hpp

```

00001 #pragma once
00002
00003 #include <internal/container.hpp>
00004 #include <hocon/config_object.hpp>
00005 #include <hocon/config_value.hpp>
00006 #include <hocon/config.hpp>
00007 #include <unordered_map>
00008
00009 namespace hocon {
00010

```



```

00011     class simple_config_object : public config_object, public container {
00012     public:
00013         simple_config_object(shared_origin origin, std::unordered_map<std::string, shared_value>
value,
00014                             resolve_status status, bool ignores_fallbacks);
00015
00016         simple_config_object(shared_origin origin, std::unordered_map<std::string, shared_value>
value);
00017
00018         shared_value attempt_peek_with_partial_resolve(std::string const& key) const override;
00019
00020         // map interface
00021         bool is_empty() const override { return _value.empty(); }
00022         size_t size() const override { return _value.size(); }
00023         shared_value operator[](std::string const& key) const override { return _value.at(key); }
00024         iterator begin() const override { return _value.begin(); }
00025         iterator end() const override { return _value.end(); }
00026         unwrapped_value unwrapped() const override;
00027
00028         shared_value get(std::string const& key) const override {
00029             if (_value.find(key) == _value.end()) {
00030                 return nullptr;
00031             }
00032             return _value.at(key);
00033         }
00034
00035         std::unordered_map<std::string, shared_value> const& entry_set() const override;
00036
00037         resolve_status get_resolve_status() const override { return _resolved; }
00038         bool ignores_fallbacks() const override { return _ignores_fallbacks; }
00039         shared_value with_fallbacks_ignored() const override;
00040         shared_value merged_with_object(shared_object fallback) const override;
00041
00042         shared_object with_value(path raw_path, shared_value value) const override;
00043         shared_object with_value(std::string key, shared_value value) const override;
00044         shared_object without_path(path raw_path) const override;
00045         shared_object with_only_path(path raw_path) const override;
00046
00054         shared_object with_only_path_or_null(path raw_path) const override;
00055
00061         shared_value replace_child(shared_value const& child, shared_value replacement) const
override;
00062
00067         bool has_descendant(shared_value const& descendant) const override;
00068
00073         std::vector<std::string> key_set() const override;
00074
00079         std::vector<shared_value> value_set(std::unordered_map<std::string, shared_value> m) const;
00080
00081         bool operator==(config_value const& other) const override;
00082
00083         static std::shared_ptr<simple_config_object> empty();
00084         static std::shared_ptr<simple_config_object> empty(shared_origin origin);
00085         static std::shared_ptr<simple_config_object> empty_instance();
00086
00087     protected:
00088         resolve_result<shared_value>
00089         resolve_substitutions(resolve_context const& context, resolve_source const& source) const
override;
00090         shared_value new_copy(shared_origin) const override;
00091         void render(std::string& s, int indent, bool at_root, config_render_options options) const
override;
00092
00093     private:
00094         std::unordered_map<std::string, shared_value> _value;
00095         resolve_status _resolved;
00096         bool _ignores_fallbacks;
00097
00098         shared_object new_copy(resolve_status const& new_status, shared_origin new_origin) const
override;
00099         std::shared_ptr<simple_config_object> modify(no_exceptions_modifier& modifier) const;
00100         std::shared_ptr<simple_config_object> modify_may_throw(modifier& modifier) const;
00101
00102         static resolve_status resolve_status_from_value(const std::unordered_map<std::string,
shared_value>& value);
00103
00104         struct resolve_modifier;
00105     };
00106
00107 } // namespace hocon

```



# Index

- [\\_cur\\_dir](#)
    - [hocon::config\\_include\\_context, 112](#)
    - [hocon::simple\\_include\\_context, 320](#)
  - [\\_original\\_text](#)
    - [hocon::config\\_double, 107](#)
    - [hocon::config\\_int, 123](#)
    - [hocon::config\\_long, 141](#)
    - [hocon::config\\_number, 176](#)
- [append\\_includer](#)
  - [hocon::config\\_parse\\_options, 191](#)
- [array\\_count](#)
  - [hocon::config\\_parser::parse\\_context, 263](#)
- [at\\_key](#)
  - [hocon::config, 39](#)
  - [hocon::config\\_boolean, 56](#)
  - [hocon::config\\_concatenation, 64](#)
  - [hocon::config\\_delayed\\_merge, 74](#)
  - [hocon::config\\_delayed\\_merge\\_object, 84](#)
  - [hocon::config\\_double, 101](#)
  - [hocon::config\\_int, 117](#)
  - [hocon::config\\_list, 127](#)
  - [hocon::config\\_long, 135](#)
  - [hocon::config\\_null, 162](#)
  - [hocon::config\\_number, 171](#)
  - [hocon::config\\_object, 180](#)
  - [hocon::config\\_reference, 199](#)
  - [hocon::config\\_string, 216](#)
  - [hocon::config\\_value, 226](#)
  - [hocon::simple\\_config\\_list, 293](#)
  - [hocon::simple\\_config\\_object, 304](#)
- [at\\_path](#)
  - [hocon::config, 40](#)
  - [hocon::config\\_boolean, 56](#)
  - [hocon::config\\_concatenation, 64](#)
  - [hocon::config\\_delayed\\_merge, 75](#)
  - [hocon::config\\_delayed\\_merge\\_object, 84](#)
  - [hocon::config\\_double, 101](#)
  - [hocon::config\\_int, 118](#)
  - [hocon::config\\_list, 127](#)
  - [hocon::config\\_long, 136](#)
  - [hocon::config\\_null, 162](#)
  - [hocon::config\\_number, 172](#)
  - [hocon::config\\_object, 180](#)
  - [hocon::config\\_reference, 199](#)
  - [hocon::config\\_string, 217](#)
  - [hocon::config\\_value, 226](#)
  - [hocon::simple\\_config\\_list, 294](#)
  - [hocon::simple\\_config\\_object, 305](#)
- [attempt\\_peek\\_with\\_partial\\_resolve](#)
  - [hocon::config\\_delayed\\_merge\\_object, 85](#)
  - [hocon::config\\_object, 180](#)
  - [hocon::simple\\_config\\_object, 305](#)
- [bad\\_path\\_exception](#)
  - [hocon::bad\\_path\\_exception, 31](#)
- [bad\\_value\\_exception](#)
  - [hocon::bad\\_value\\_exception, 32, 33](#)
- [begin](#)
  - [hocon::config\\_delayed\\_merge\\_object, 85](#)
  - [hocon::simple\\_config\\_list, 294](#)
  - [hocon::simple\\_config\\_object, 306](#)
  - [std, 28](#)
- [bug\\_or\\_broken\\_exception](#)
  - [hocon::bug\\_or\\_broken\\_exception, 34](#)
- [check\\_valid](#)
  - [hocon::config, 40](#)
- [comments](#)
  - [hocon::config\\_origin, 188](#)
  - [hocon::simple\\_config\\_origin, 316](#)
- [concise](#)
  - [hocon::config\\_render\\_options, 208](#)
- [config](#)
  - [hocon::config\\_object, 186](#)
  - [hocon::config\\_value, 231](#)
- [config\\_concatenation](#)
  - [hocon::config\\_value, 231](#)
- [config\\_delayed\\_merge](#)
  - [hocon::config\\_value, 231](#)
- [config\\_delayed\\_merge\\_object](#)
  - [hocon::config\\_object, 186](#)
  - [hocon::config\\_value, 231](#)
- [config\\_exception](#)
  - [hocon::config\\_exception, 108, 109](#)
  - [hocon::missing\\_exception, 253, 254](#)
  - [hocon::null\\_exception, 260](#)
  - [hocon::wrong\\_type\\_exception, 337](#)
- [config\\_include\\_context](#)
  - [hocon::config\\_include\\_context, 110](#)
- [config\\_include\\_kind](#)
  - [hocon, 22](#)
- [config\\_list](#)
  - [hocon::config\\_list, 126](#)
- [config\\_object](#)
  - [hocon::config, 53](#)
  - [hocon::config\\_value, 231](#)
- [config\\_parse\\_options](#)
  - [hocon::config\\_parse\\_options, 191](#)
- [config\\_parseable](#)

- hocon::config, 53
- config\_render\_options
  - hocon::config\_render\_options, 208
- config\_resolve\_options
  - hocon::config\_resolve\_options, 212
- config\_string\_type
  - hocon, 22
- config\_value
  - hocon::config, 53
  - hocon::config\_mergeable, 144
  - hocon::config\_object, 186
- construct\_delayed\_merge
  - hocon::config\_delayed\_merge\_object, 85
  - hocon::config\_object, 181
  - hocon::simple\_config\_object, 306
- contains
  - hocon::simple\_config\_list, 294
- context
  - hocon::resolve\_result< V >, 284
- context\_initialized
  - hocon::file\_name\_source, 237
  - hocon::name\_source, 256
  - hocon::relative\_name\_source, 281
- CPP\_HOCON\_VERSION
  - version.h, 358
- CPP\_HOCON\_VERSION\_MAJOR
  - version.h, 358
- CPP\_HOCON\_VERSION\_MINOR
  - version.h, 358
- CPP\_HOCON\_VERSION\_PATCH
  - version.h, 358
- CPP\_HOCON\_VERSION\_WITH\_COMMIT
  - version.h, 358
- create\_origin
  - hocon::parseable\_file, 268
  - hocon::parseable\_not\_found, 270
  - hocon::parseable\_resources, 272
  - hocon::parseable\_string, 274
- default\_transformer
  - hocon::config\_value, 232
- defaults
  - hocon::config\_parse\_options, 192
- description
  - hocon::config\_origin, 188
  - hocon::simple\_config\_origin, 316
- double\_value
  - hocon::config\_double, 102
  - hocon::config\_int, 118
  - hocon::config\_long, 136
- duration
  - hocon, 19
- end
  - hocon::config\_delayed\_merge\_object, 86
  - hocon::simple\_config\_list, 294
  - hocon::simple\_config\_object, 306
  - std, 28
- entry\_set
  - hocon::config, 41
  - hocon::config\_delayed\_merge\_object, 86
  - hocon::simple\_config\_object, 306
- equals
  - hocon::config\_boolean, 56
  - hocon::config\_concatenation, 64
  - hocon::config\_delayed\_merge, 75
  - hocon::config\_delayed\_merge\_object, 86
  - hocon::config\_double, 102
  - hocon::config\_int, 118
  - hocon::config\_list, 127
  - hocon::config\_long, 136
  - hocon::config\_null, 162
  - hocon::config\_number, 172
  - hocon::config\_object, 181
  - hocon::config\_reference, 200
  - hocon::config\_string, 217
  - hocon::config\_value, 226
  - hocon::simple\_config\_list, 295
  - hocon::simple\_config\_object, 306
- forEach
  - List< T >, 250
- from\_any\_ref
  - hocon::config\_value\_factory, 233
- front
  - List< T >, 250
- FwdListIter
  - FwdListIter< T >, 241
- FwdListIter< T >, 240
  - FwdListIter, 241
  - List< T >, 252
  - operator!=, 241
  - operator\*, 241
  - operator++, 241
  - operator==, 242
- generic\_exception
  - hocon::generic\_exception, 243
- get
  - hocon::config\_delayed\_merge\_object, 86
  - hocon::simple\_config\_list, 295
  - hocon::simple\_config\_object, 306
- get\_allow\_missing
  - hocon::config\_parse\_options, 192
- get\_allow\_unresolved
  - hocon::config\_resolve\_options, 212
- get\_comments
  - hocon::config\_render\_options, 208
- get\_context
  - hocon::file\_name\_source, 237
  - hocon::name\_source, 256
  - hocon::relative\_name\_source, 281
- get\_cur\_dir
  - hocon::config\_include\_context, 110
  - hocon::simple\_include\_context, 319
- get\_duration
  - hocon::config, 41
- get\_formatted

- hocon::config\_render\_options, 209
- get\_homogeneous\_unwrapped\_list
  - hocon::config, 42
- get\_includer
  - hocon::config\_parse\_options, 192
- get\_is\_null
  - hocon::config, 42
- get\_json
  - hocon::config\_render\_options, 209
- get\_origin\_comments
  - hocon::config\_render\_options, 209
- get\_origin\_description
  - hocon::config\_parse\_options, 192
- get\_resolve\_status
  - hocon::config\_concatenation, 65
  - hocon::config\_delayed\_merge, 75
  - hocon::config\_delayed\_merge\_object, 86
  - hocon::config\_reference, 200
  - hocon::simple\_config\_list, 295
  - hocon::simple\_config\_object, 307
- get\_syntax
  - hocon::config\_parse\_options, 193
- get\_tokens
  - hocon::config\_node\_array, 146
  - hocon::config\_node\_comment, 147
  - hocon::config\_node\_complex\_value, 148
  - hocon::config\_node\_concatenation, 150
  - hocon::config\_node\_field, 151
  - hocon::config\_node\_include, 152
  - hocon::config\_node\_object, 154
  - hocon::config\_node\_path, 155
  - hocon::config\_node\_root, 156
  - hocon::config\_node\_simple\_value, 158
  - hocon::config\_node\_single\_token, 159
- get\_use\_system\_environment
  - hocon::config\_resolve\_options, 213
- getList
  - OutListIter< T >, 262
- guess\_syntax
  - hocon::parseable\_file, 268
- has\_descendant
  - hocon::config\_concatenation, 65
  - hocon::config\_delayed\_merge, 75
  - hocon::config\_delayed\_merge\_object, 87
  - hocon::container, 234
  - hocon::replaceable\_merge\_stack, 282
  - hocon::simple\_config\_list, 295
  - hocon::simple\_config\_object, 307
- has\_funky\_chars
  - hocon::path, 277
- has\_next
  - hocon::iterator\_wrapper< iter >, 247
  - hocon::single\_token\_iterator, 323
  - hocon::token\_iterator, 327
  - hocon::token\_list\_iterator, 328
- has\_path
  - hocon::config, 43
  - hocon::config\_document, 96
  - hocon::simple\_config\_document, 287
- has\_path\_or\_null
  - hocon::config, 43
- headCount
  - List< T >, 250
- hocon, 15
  - config\_include\_kind, 22
  - config\_string\_type, 22
  - duration, 19
  - make\_resolve\_result, 23
  - operator==, 24
  - origin\_type, 23
  - resolve\_status, 23
  - shared\_config, 19
  - shared\_container, 19
  - shared\_include\_context, 19
  - shared\_includer, 19
  - shared\_list, 20
  - shared\_node, 20
  - shared\_node\_array, 20
  - shared\_node\_concatenation, 20
  - shared\_node\_list, 20
  - shared\_node\_object, 20
  - shared\_node\_value, 21
  - shared\_object, 21
  - shared\_origin, 21
  - shared\_parseable, 21
  - shared\_string, 21
  - shared\_token, 21
  - shared\_value, 22
  - time\_unit, 23
  - token\_list, 22
  - token\_type, 23
  - unwrapped\_value, 22
- hocon/config.hpp, 339
- hocon/config\_exception.hpp, 341
- hocon/config\_include\_context.hpp, 343
- hocon/config\_includer.hpp, 343
- hocon/config\_includer\_file.hpp, 343
- hocon/config\_list.hpp, 343
- hocon/config\_mergeable.hpp, 344
- hocon/config\_object.hpp, 344
- hocon/config\_origin.hpp, 345
- hocon/config\_parse\_options.hpp, 345
- hocon/config\_parseable.hpp, 346
- hocon/config\_render\_options.hpp, 346
- hocon/config\_resolve\_options.hpp, 347
- hocon/config\_syntax.hpp, 347
- hocon/config\_value.hpp, 347
- hocon/config\_value\_factory.hpp, 349
- hocon/export.h, 349
- hocon/functional\_list.hpp, 350
- hocon/parser/config\_document.hpp, 354
- hocon/parser/config\_document\_factory.hpp, 354
- hocon/parser/config\_node.hpp, 354
- hocon/path.hpp, 355
- hocon/program\_options.hpp, 355
- hocon/types.hpp, 356

- hocon/version.h, [357](#), [359](#)
- hocon::abstract\_config\_node, [29](#)
  - render, [29](#)
- hocon::abstract\_config\_node\_value, [30](#)
  - render, [30](#)
- hocon::bad\_path\_exception, [31](#)
  - bad\_path\_exception, [31](#)
- hocon::bad\_value\_exception, [32](#)
  - bad\_value\_exception, [32](#), [33](#)
- hocon::bug\_or\_broken\_exception, [33](#)
  - bug\_or\_broken\_exception, [34](#)
- hocon::comment, [34](#)
  - operator==, [35](#)
  - to\_string, [35](#)
- hocon::config, [35](#)
  - at\_key, [39](#)
  - at\_path, [40](#)
  - check\_valid, [40](#)
  - config\_object, [53](#)
  - config\_parseable, [53](#)
  - config\_value, [53](#)
  - entry\_set, [41](#)
  - get\_duration, [41](#)
  - get\_homogeneous\_unwrapped\_list, [42](#)
  - get\_is\_null, [42](#)
  - has\_path, [43](#)
  - has\_path\_or\_null, [43](#)
  - is\_empty, [44](#)
  - is\_resolved, [44](#)
  - origin, [44](#)
  - parse\_file\_any\_syntax, [45](#), [46](#)
  - parse\_string, [46](#), [47](#)
  - parseable, [53](#)
  - resolve, [47](#), [48](#)
  - resolve\_with, [48](#), [49](#)
  - root, [49](#)
  - to\_fallback\_value, [49](#)
  - with\_fallback, [49](#)
  - with\_only\_path, [50](#)
  - with\_value, [52](#)
  - without\_path, [52](#)
- hocon::config\_boolean, [54](#)
  - at\_key, [56](#)
  - at\_path, [56](#)
  - equals, [56](#)
  - new\_copy, [57](#)
  - operator==, [57](#)
  - origin, [57](#)
  - relativized, [57](#)
  - render, [58](#)
  - to\_fallback\_value, [59](#)
  - transform\_to\_string, [59](#)
  - type, [55](#)
  - type\_name, [59](#)
  - unwrapped, [59](#)
  - value\_type, [59](#)
  - value\_type\_name, [60](#)
  - with\_fallback, [60](#)
  - with\_origin, [61](#)
- hocon::config\_concatenation, [61](#)
  - at\_key, [64](#)
  - at\_path, [64](#)
  - equals, [64](#)
  - get\_resolve\_status, [65](#)
  - has\_descendant, [65](#)
  - ignores\_fallbacks, [65](#)
  - new\_copy, [65](#)
  - operator==, [65](#)
  - origin, [66](#)
  - relativized, [66](#)
  - render, [66](#), [67](#)
  - replace\_child, [67](#)
  - resolve\_substitutions, [68](#)
  - to\_fallback\_value, [68](#)
  - type, [63](#)
  - type\_name, [68](#)
  - unmerged\_values, [68](#)
  - unwrapped, [69](#)
  - value\_type, [69](#)
  - value\_type\_name, [69](#)
  - with\_fallback, [69](#)
  - with\_origin, [70](#)
- hocon::config\_delayed\_merge, [72](#)
  - at\_key, [74](#)
  - at\_path, [75](#)
  - equals, [75](#)
  - get\_resolve\_status, [75](#)
  - has\_descendant, [75](#)
  - ignores\_fallbacks, [75](#)
  - make\_replacement, [76](#)
  - new\_copy, [76](#)
  - operator==, [76](#)
  - origin, [76](#)
  - relativized, [76](#)
  - render, [77](#), [78](#)
  - replace\_child, [78](#)
  - resolve\_substitutions, [78](#)
  - to\_fallback\_value, [79](#)
  - type, [74](#)
  - type\_name, [79](#)
  - unmerged\_values, [79](#)
  - unwrapped, [79](#)
  - value\_type, [79](#)
  - value\_type\_name, [80](#)
  - with\_fallback, [80](#)
  - with\_origin, [81](#)
- hocon::config\_delayed\_merge\_object, [81](#)
  - at\_key, [84](#)
  - at\_path, [84](#)
  - attempt\_peek\_with\_partial\_resolve, [85](#)
  - begin, [85](#)
  - construct\_delayed\_merge, [85](#)
  - end, [86](#)
  - entry\_set, [86](#)
  - equals, [86](#)
  - get, [86](#)

- get\_resolve\_status, 86
- has\_descendant, 87
- ignores\_fallbacks, 87
- is\_empty, 87
- iterator, 84
- key\_set, 87
- make\_replacement, 87
- new\_copy, 88
- operator==, 88
- operator[], 88
- origin, 88
- relativized, 89
- render, 89, 90
- replace\_child, 90
- resolve\_substitutions, 91
- size, 91
- to\_config, 91
- to\_fallback\_value, 91
- type, 84
- type\_name, 92
- unmerged\_values, 92
- unwrapped, 92
- value\_type, 92
- value\_type\_name, 92
- with\_fallback, 93
- with\_only\_path, 94
- with\_only\_path\_or\_null, 94
- with\_origin, 94
- with\_value, 94, 95
- without\_path, 95
- hocon::config\_document, 95
  - has\_path, 96
  - render, 97
  - with\_value, 97
  - with\_value\_text, 97
  - without\_path, 98
- hocon::config\_document\_parser::parse\_context, 262
  - parse\_single\_value, 263
- hocon::config\_double, 99
  - \_original\_text, 107
  - at\_key, 101
  - at\_path, 101
  - double\_value, 102
  - equals, 102
  - long\_value, 102
  - new\_copy, 102
  - operator==, 102
  - origin, 103
  - relativized, 103
  - render, 103, 104
  - to\_fallback\_value, 104
  - transform\_to\_string, 105
  - type, 101
  - type\_name, 105
  - unwrapped, 105
  - value\_type, 105
  - value\_type\_name, 105
  - with\_fallback, 106
  - with\_origin, 107
- hocon::config\_exception, 108
  - config\_exception, 108, 109
- hocon::config\_include\_context, 109
  - \_cur\_dir, 112
  - config\_include\_context, 110
  - get\_cur\_dir, 110
  - parse\_options, 110
  - relative\_to, 111
  - set\_cur\_dir, 111
- hocon::config\_includer, 112
  - include, 112
  - with\_fallback, 113
- hocon::config\_includer\_file, 114
  - include\_file, 114
- hocon::config\_int, 115
  - \_original\_text, 123
  - at\_key, 117
  - at\_path, 118
  - double\_value, 118
  - equals, 118
  - long\_value, 118
  - new\_copy, 118
  - operator==, 119
  - origin, 119
  - relativized, 119
  - render, 120
  - to\_fallback\_value, 120
  - transform\_to\_string, 121
  - type, 117
  - type\_name, 121
  - unwrapped, 121
  - value\_type, 121
  - value\_type\_name, 121
  - with\_fallback, 122
  - with\_origin, 123
- hocon::config\_list, 124
  - at\_key, 127
  - at\_path, 127
  - config\_list, 126
  - equals, 127
  - iterator, 126
  - origin, 128
  - relativized, 128
  - render, 128, 129
  - to\_fallback\_value, 129
  - type, 126
  - type\_name, 130
  - unwrapped, 130
  - value\_type, 130
  - value\_type\_name, 130
  - with\_fallback, 130
  - with\_origin, 131
- hocon::config\_long, 133
  - \_original\_text, 141
  - at\_key, 135
  - at\_path, 136
  - double\_value, 136

- equals, 136
  - long\_value, 136
  - new\_copy, 136
  - operator==, 137
  - origin, 137
  - relativized, 137
  - render, 138
  - to\_fallback\_value, 138
  - transform\_to\_string, 139
  - type, 135
  - type\_name, 139
  - unwrapped, 139
  - value\_type, 139
  - value\_type\_name, 139
  - with\_fallback, 140
  - with\_origin, 141
- hocon::config\_mergeable, 142
  - config\_value, 144
  - to\_fallback\_value, 143
  - with\_fallback, 143
- hocon::config\_node, 144
  - render, 145
- hocon::config\_node\_array, 145
  - get\_tokens, 146
  - new\_node, 146
  - render, 146
- hocon::config\_node\_comment, 147
  - get\_tokens, 147
  - render, 147
- hocon::config\_node\_complex\_value, 148
  - get\_tokens, 148
  - render, 148
- hocon::config\_node\_concatenation, 149
  - get\_tokens, 150
  - new\_node, 150
  - render, 150
- hocon::config\_node\_field, 150
  - get\_tokens, 151
  - render, 151
- hocon::config\_node\_include, 152
  - get\_tokens, 152
  - render, 152
- hocon::config\_node\_object, 153
  - get\_tokens, 154
  - new\_node, 154
  - render, 154
- hocon::config\_node\_path, 155
  - get\_tokens, 155
  - render, 155
- hocon::config\_node\_root, 156
  - get\_tokens, 156
  - new\_node, 156
  - render, 157
- hocon::config\_node\_simple\_value, 157
  - get\_tokens, 158
  - render, 158
- hocon::config\_node\_single\_token, 158
  - get\_tokens, 159
- render, 159
- hocon::config\_null, 160
  - at\_key, 162
  - at\_path, 162
  - equals, 162
  - new\_copy, 163
  - operator==, 163
  - origin, 163
  - relativized, 163
  - render, 164, 165
  - to\_fallback\_value, 165
  - transform\_to\_string, 165
  - type, 161
  - type\_name, 165
  - unwrapped, 165
  - value\_type, 166
  - value\_type\_name, 166
  - with\_fallback, 166
  - with\_origin, 167
- hocon::config\_number, 169
  - \_original\_text, 176
  - at\_key, 171
  - at\_path, 172
  - equals, 172
  - operator==, 172
  - origin, 172
  - relativized, 173
  - render, 173
  - to\_fallback\_value, 174
  - transform\_to\_string, 174
  - type, 171
  - type\_name, 174
  - value\_type, 174
  - value\_type\_name, 175
  - with\_fallback, 175
  - with\_origin, 176
- hocon::config\_object, 177
  - at\_key, 180
  - at\_path, 180
  - attempt\_peek\_with\_partial\_resolve, 180
  - config, 186
  - config\_delayed\_merge\_object, 186
  - config\_value, 186
  - construct\_delayed\_merge, 181
  - equals, 181
  - iterator, 179
  - key\_set, 181
  - new\_copy, 181
  - origin, 182
  - relativized, 182
  - render, 182, 183
  - resolve\_source, 186
  - simple\_config\_object, 187
  - to\_config, 183
  - to\_fallback\_value, 184
  - type, 179
  - type\_name, 184
  - value\_type, 184



- value\_type\_name, 184
- with\_fallback, 184
- with\_only\_path\_or\_null, 185
- with\_origin, 185
- hocon::config\_origin, 187
  - comments, 188
  - description, 188
  - line\_number, 188
  - with\_comments, 189
  - with\_line\_number, 189
- hocon::config\_parse\_options, 190
  - append\_includer, 191
  - config\_parse\_options, 191
  - defaults, 192
  - get\_allow\_missing, 192
  - get\_includer, 192
  - get\_origin\_description, 192
  - get\_syntax, 193
  - prepend\_includer, 193
  - set\_allow\_missing, 193
  - set\_includer, 194
  - set\_origin\_description, 194
  - set\_syntax, 194
- hocon::config\_parseable, 195
  - options, 196
  - origin, 196
  - parse, 196
- hocon::config\_parser::parse\_context, 263
  - array\_count, 263
- hocon::config\_reference, 197
  - at\_key, 199
  - at\_path, 199
  - equals, 200
  - get\_resolve\_status, 200
  - ignores\_fallbacks, 200
  - new\_copy, 200
  - operator==, 200
  - origin, 201
  - relativized, 201
  - render, 201, 202
  - resolve\_substitutions, 203
  - to\_fallback\_value, 203
  - type, 199
  - type\_name, 203
  - unmerged\_values, 203
  - unwrapped, 203
  - value\_type, 204
  - value\_type\_name, 204
  - with\_fallback, 204
  - with\_origin, 205
- hocon::config\_render\_options, 207
  - concise, 208
  - config\_render\_options, 208
  - get\_comments, 208
  - get\_formatted, 209
  - get\_json, 209
  - get\_origin\_comments, 209
  - set\_comments, 209
  - set\_formatted, 210
  - set\_json, 210
  - set\_origin\_comments, 210
- hocon::config\_resolve\_options, 211
  - config\_resolve\_options, 212
  - get\_allow\_unresolved, 212
  - get\_use\_system\_environment, 213
  - set\_allow\_unresolved, 213
  - set\_use\_system\_environment, 213
- hocon::config\_string, 214
  - at\_key, 216
  - at\_path, 217
  - equals, 217
  - new\_copy, 217
  - operator==, 217
  - origin, 217
  - relativized, 218
  - render, 218, 219
  - to\_fallback\_value, 219
  - transform\_to\_string, 219
  - type, 216
  - type\_name, 220
  - unwrapped, 220
  - value\_type, 220
  - value\_type\_name, 220
  - with\_fallback, 220
  - with\_origin, 221
- hocon::config\_value, 223
  - at\_key, 226
  - at\_path, 226
  - config, 231
  - config\_concatenation, 231
  - config\_delayed\_merge, 231
  - config\_delayed\_merge\_object, 231
  - config\_object, 231
  - default\_transformer, 232
  - equals, 226
  - origin, 227
  - relativized, 227
  - render, 227, 228
  - resolve\_context, 232
  - simple\_config\_list, 232
  - simple\_config\_object, 232
  - to\_fallback\_value, 228
  - token, 232
  - type, 225
  - type\_name, 228
  - value, 232
  - value\_type, 229
  - value\_type\_name, 229
  - with\_fallback, 229
  - with\_origin, 230
- hocon::config\_value::modifier, 254
- hocon::config\_value::no\_exceptions\_modifier, 256
  - modify\_child\_may\_throw, 257
- hocon::config\_value\_factory, 233
  - from\_any\_ref, 233
- hocon::container, 234

- has\_descendant, 234
- replace\_child, 235
- hocon::default\_transformer, 235
- hocon::double\_slash\_comment, 236
  - operator==, 236
  - to\_string, 236
  - token\_text, 236
- hocon::file\_name\_source, 237
  - context\_initialized, 237
  - get\_context, 237
  - name\_to\_parseable, 238
  - set\_context, 238
- hocon::full\_includer, 238
  - include, 239
  - include\_file, 239
  - with\_fallback, 240
- hocon::generic\_exception, 242
  - generic\_exception, 243
- hocon::hash\_comment, 243
  - operator==, 243
  - to\_string, 244
  - token\_text, 244
- hocon::ignored\_whitespace, 244
  - operator==, 245
  - to\_string, 245
- hocon::io\_exception, 245
  - io\_exception, 246
- hocon::iterator, 246
- hocon::iterator\_wrapper< iter >, 247
  - has\_next, 247
  - iterator\_wrapper, 247
  - next, 247
- hocon::line, 248
  - operator==, 248
  - to\_string, 248
- hocon::missing\_exception, 253
  - config\_exception, 253, 254
  - missing\_exception, 253
- hocon::name\_source, 255
  - context\_initialized, 256
  - get\_context, 256
  - name\_source, 255
  - set\_context, 256
- hocon::not\_possible\_to\_resolve\_exception, 257
  - not\_possible\_to\_resolve\_exception, 258
- hocon::not\_resolved\_exception, 258
  - not\_resolved\_exception, 259
- hocon::null\_exception, 259
  - config\_exception, 260
  - null\_exception, 260
- hocon::parse\_exception, 264
  - parse\_exception, 264
- hocon::parseable, 265
  - options, 265
  - origin, 266
  - parse, 266
- hocon::parseable\_file, 267
  - create\_origin, 268
  - guess\_syntax, 268
  - options, 268
  - origin, 268
  - parse, 268
  - reader, 269
- hocon::parseable\_not\_found, 269
  - create\_origin, 270
  - options, 270
  - origin, 270
  - parse, 270
  - reader, 271
- hocon::parseable\_resources, 271
  - create\_origin, 272
  - options, 272
  - origin, 272
  - parse, 273
  - reader, 273
- hocon::parseable\_string, 273
  - create\_origin, 274
  - options, 274
  - origin, 275
  - parse, 275
  - reader, 275
- hocon::path, 276
  - has\_funky\_chars, 277
  - parent, 277
  - remainder, 277
  - render, 277
  - to\_string, 277
- hocon::path\_builder, 278
  - result, 278
- hocon::path\_parser, 278
- hocon::problem, 279
  - operator==, 279
  - to\_string, 279
- hocon::problem\_exception, 280
- hocon::relative\_name\_source, 280
  - context\_initialized, 281
  - get\_context, 281
  - name\_to\_parseable, 281
  - set\_context, 281
- hocon::replaceable\_merge\_stack, 281
  - has\_descendant, 282
  - replace\_child, 282
- hocon::resolve\_context, 283
- hocon::resolve\_result< V >, 283
  - context, 284
  - resolve\_result, 284
  - value, 284
- hocon::resolve\_source, 284
  - node, 285
- hocon::resolve\_source::result\_with\_path, 285
  - path\_from\_root, 286
  - result, 286
- hocon::simple\_config\_document, 286
  - has\_path, 287
  - render, 287
  - with\_value, 287

- with\_value\_text, 288
  - without\_path, 288
- hocon::simple\_config\_list, 290
  - at\_key, 293
  - at\_path, 294
  - begin, 294
  - contains, 294
  - end, 294
  - equals, 295
  - get, 295
  - get\_resolve\_status, 295
  - has\_descendant, 295
  - index\_of, 295
  - is\_empty, 296
  - iterator, 292
  - new\_copy, 296
  - operator==, 296
  - operator[], 296
  - origin, 296
  - relativized, 297
  - render, 297, 298
  - replace\_child, 298
  - resolve\_substitutions, 298
  - size, 299
  - to\_fallback\_value, 299
  - type, 292
  - type\_name, 299
  - unwrapped, 299
  - value\_type, 299
  - value\_type\_name, 300
  - with\_fallback, 300
  - with\_origin, 301
- hocon::simple\_config\_object, 301
  - at\_key, 304
  - at\_path, 305
  - attempt\_peek\_with\_partial\_resolve, 305
  - begin, 306
  - construct\_delayed\_merge, 306
  - end, 306
  - entry\_set, 306
  - equals, 306
  - get, 306
  - get\_resolve\_status, 307
  - has\_descendant, 307
  - ignores\_fallbacks, 307
  - is\_empty, 307
  - iterator, 304
  - key\_set, 307
  - merged\_with\_object, 308
  - new\_copy, 308
  - operator==, 308
  - operator[], 308
  - origin, 308
  - relativized, 309
  - render, 309, 310
  - replace\_child, 310
  - resolve\_substitutions, 310
  - size, 311
  - to\_config, 311
  - to\_fallback\_value, 311
  - type, 304
  - type\_name, 311
  - unwrapped, 312
  - value\_set, 312
  - value\_type, 312
  - value\_type\_name, 312
  - with\_fallback, 312
  - with\_fallbacks\_ignored, 313
  - with\_only\_path, 313
  - with\_only\_path\_or\_null, 314
  - with\_origin, 314
  - with\_value, 314
  - without\_path, 315
- hocon::simple\_config\_origin, 315
  - comments, 316
  - description, 316
  - line\_number, 317
  - simple\_config\_origin, 316
  - with\_comments, 317
  - with\_line\_number, 318
- hocon::simple\_include\_context, 318
  - \_cur\_dir, 320
  - get\_cur\_dir, 319
  - parse\_options, 319
  - relative\_to, 319
  - set\_cur\_dir, 320
- hocon::simple\_includer, 320
  - include, 321
  - include\_file, 322
  - with\_fallback, 322
- hocon::single\_token\_iterator, 323
  - has\_next, 323
  - next, 323
- hocon::substitution, 324
  - operator==, 324
  - to\_string, 324
  - token\_text, 325
- hocon::substitution\_expression, 325
- hocon::token, 326
- hocon::token\_iterator, 326
  - has\_next, 327
  - next, 327
- hocon::token\_list\_iterator, 327
  - has\_next, 328
  - next, 328
- hocon::tokens, 328
  - start\_token, 329
- hocon::unmergeable, 329
- hocon::unquoted\_text, 330
  - operator==, 330
  - to\_string, 330
- hocon::unresolved\_substitution\_exception, 331
  - unresolved\_substitution\_exception, 331
- hocon::unsupported\_exception, 332
- hocon::validation\_failed\_exception, 332
  - problems, 333

- validation\_failed\_exception, 333
- hocon::validation\_problem, 333
  - origin, 334
  - path, 335
  - problem, 335
  - to\_string, 334
  - validation\_problem, 334
- hocon::value, 335
  - operator==, 336
  - origin, 336
  - to\_string, 336
- hocon::wrong\_type\_exception, 336
  - config\_exception, 337
  - wrong\_type\_exception, 337
- ignores\_fallbacks
  - hocon::config\_concatenation, 65
  - hocon::config\_delayed\_merge, 75
  - hocon::config\_delayed\_merge\_object, 87
  - hocon::config\_reference, 200
  - hocon::simple\_config\_object, 307
- include
  - hocon::config\_includer, 112
  - hocon::full\_includer, 239
  - hocon::simple\_includer, 321
- include\_file
  - hocon::config\_includer\_file, 114
  - hocon::full\_includer, 239
  - hocon::simple\_includer, 322
- index\_of
  - hocon::simple\_config\_list, 295
- insertedAt
  - List< T >, 251
- internal/config\_document\_parser.hpp, 359
- internal/config\_parser.hpp, 360
- internal/config\_util.hpp, 360
- internal/container.hpp, 361
- internal/default\_transformer.hpp, 361
- internal/full\_includer.hpp, 361
- internal/nodes/abstract\_config\_node.hpp, 361
- internal/nodes/abstract\_config\_node\_value.hpp, 362
- internal/nodes/config\_node\_array.hpp, 362
- internal/nodes/config\_node\_comment.hpp, 362
- internal/nodes/config\_node\_complex\_value.hpp, 362
- internal/nodes/config\_node\_concatenation.hpp, 363
- internal/nodes/config\_node\_field.hpp, 363
- internal/nodes/config\_node\_include.hpp, 363
- internal/nodes/config\_node\_object.hpp, 364
- internal/nodes/config\_node\_path.hpp, 364
- internal/nodes/config\_node\_root.hpp, 365
- internal/nodes/config\_node\_simple\_value.hpp, 365
- internal/nodes/config\_node\_single\_token.hpp, 365
- internal/parseable.hpp, 366
- internal/path\_builder.hpp, 367
- internal/path\_parser.hpp, 367
- internal/replaceable\_merge\_stack.hpp, 368
- internal/resolve\_context.hpp, 368
- internal/resolve\_result.hpp, 369
- internal/resolve\_source.hpp, 369
- internal/simple\_config\_document.hpp, 370
- internal/simple\_config\_origin.hpp, 371
- internal/simple\_include\_context.hpp, 372
- internal/simple\_includer.hpp, 372
- internal/substitution\_expression.hpp, 373
- internal/token.hpp, 374
- internal/tokenizer.hpp, 374
- internal/tokens.hpp, 376
- internal/unmergeable.hpp, 377
- internal/values/config\_boolean.hpp, 378
- internal/values/config\_concatenation.hpp, 378
- internal/values/config\_delayed\_merge.hpp, 379
- internal/values/config\_delayed\_merge\_object.hpp, 380
- internal/values/config\_double.hpp, 380
- internal/values/config\_int.hpp, 381
- internal/values/config\_long.hpp, 381
- internal/values/config\_null.hpp, 381
- internal/values/config\_number.hpp, 382
- internal/values/config\_reference.hpp, 382
- internal/values/config\_string.hpp, 383
- internal/values/simple\_config\_list.hpp, 383
- internal/values/simple\_config\_object.hpp, 384
- io\_exception
  - hocon::io\_exception, 246
- is\_empty
  - hocon::config, 44
  - hocon::config\_delayed\_merge\_object, 87
  - hocon::simple\_config\_list, 296
  - hocon::simple\_config\_object, 307
- is\_resolved
  - hocon::config, 44
- isEmpty
  - List< T >, 251
- iterator
  - hocon::config\_delayed\_merge\_object, 84
  - hocon::config\_list, 126
  - hocon::config\_object, 179
  - hocon::simple\_config\_list, 292
  - hocon::simple\_config\_object, 304
- iterator\_wrapper
  - hocon::iterator\_wrapper< iter >, 247
- key\_set
  - hocon::config\_delayed\_merge\_object, 87
  - hocon::config\_object, 181
  - hocon::simple\_config\_object, 307
- line\_number
  - hocon::config\_origin, 188
  - hocon::simple\_config\_origin, 317
- List
  - List< T >, 249, 250
- List< T >, 249
  - forEach, 250
  - front, 250
  - FwdListIter< T >, 252
  - headCount, 250
  - insertedAt, 251
  - isEmpty, 251

- List, [249](#), [250](#)
- member, [251](#)
- popped\_front, [251](#)
- pushed\_front, [251](#)
- removed, [252](#)
- removed1, [252](#)
- take, [252](#)
- long\_value
  - hocon::config\_double, [102](#)
  - hocon::config\_int, [118](#)
  - hocon::config\_long, [136](#)
- make\_replacement
  - hocon::config\_delayed\_merge, [76](#)
  - hocon::config\_delayed\_merge\_object, [87](#)
- make\_resolve\_result
  - hocon, [23](#)
- member
  - List< T >, [251](#)
- merged\_with\_object
  - hocon::simple\_config\_object, [308](#)
- missing\_exception
  - hocon::missing\_exception, [253](#)
- modify\_child\_may\_throw
  - hocon::config\_value::no\_exceptions\_modifier, [257](#)
- name\_source
  - hocon::name\_source, [255](#)
- name\_to\_parseable
  - hocon::file\_name\_source, [238](#)
  - hocon::relative\_name\_source, [281](#)
- new\_copy
  - hocon::config\_boolean, [57](#)
  - hocon::config\_concatenation, [65](#)
  - hocon::config\_delayed\_merge, [76](#)
  - hocon::config\_delayed\_merge\_object, [88](#)
  - hocon::config\_double, [102](#)
  - hocon::config\_int, [118](#)
  - hocon::config\_long, [136](#)
  - hocon::config\_null, [163](#)
  - hocon::config\_object, [181](#)
  - hocon::config\_reference, [200](#)
  - hocon::config\_string, [217](#)
  - hocon::simple\_config\_list, [296](#)
  - hocon::simple\_config\_object, [308](#)
- new\_node
  - hocon::config\_node\_array, [146](#)
  - hocon::config\_node\_concatenation, [150](#)
  - hocon::config\_node\_object, [154](#)
  - hocon::config\_node\_root, [156](#)
- next
  - hocon::iterator\_wrapper< iter >, [247](#)
  - hocon::single\_token\_iterator, [323](#)
  - hocon::token\_iterator, [327](#)
  - hocon::token\_list\_iterator, [328](#)
- node
  - hocon::resolve\_source, [285](#)
- not\_possible\_to\_resolve\_exception
  - hocon::not\_possible\_to\_resolve\_exception, [258](#)
- not\_resolved\_exception
  - hocon::not\_resolved\_exception, [259](#)
- null\_exception
  - hocon::null\_exception, [260](#)
- operator!=
  - FwdListIter< T >, [241](#)
- operator\*
  - FwdListIter< T >, [241](#)
  - OutListIter< T >, [262](#)
- operator++
  - FwdListIter< T >, [241](#)
  - OutListIter< T >, [262](#)
- operator==
  - FwdListIter< T >, [242](#)
  - hocon, [24](#)
  - hocon::comment, [35](#)
  - hocon::config\_boolean, [57](#)
  - hocon::config\_concatenation, [65](#)
  - hocon::config\_delayed\_merge, [76](#)
  - hocon::config\_delayed\_merge\_object, [88](#)
  - hocon::config\_double, [102](#)
  - hocon::config\_int, [119](#)
  - hocon::config\_long, [137](#)
  - hocon::config\_null, [163](#)
  - hocon::config\_number, [172](#)
  - hocon::config\_reference, [200](#)
  - hocon::config\_string, [217](#)
  - hocon::double\_slash\_comment, [236](#)
  - hocon::hash\_comment, [243](#)
  - hocon::ignored\_whitespace, [245](#)
  - hocon::line, [248](#)
  - hocon::problem, [279](#)
  - hocon::simple\_config\_list, [296](#)
  - hocon::simple\_config\_object, [308](#)
  - hocon::substitution, [324](#)
  - hocon::unquoted\_text, [330](#)
  - hocon::value, [336](#)
- operator[]
  - hocon::config\_delayed\_merge\_object, [88](#)
  - hocon::simple\_config\_list, [296](#)
  - hocon::simple\_config\_object, [308](#)
- options
  - hocon::config\_parseable, [196](#)
  - hocon::parseable, [265](#)
  - hocon::parseable\_file, [268](#)
  - hocon::parseable\_not\_found, [270](#)
  - hocon::parseable\_resources, [272](#)
  - hocon::parseable\_string, [274](#)
- origin
  - hocon::config, [44](#)
  - hocon::config\_boolean, [57](#)
  - hocon::config\_concatenation, [66](#)
  - hocon::config\_delayed\_merge, [76](#)
  - hocon::config\_delayed\_merge\_object, [88](#)
  - hocon::config\_double, [103](#)
  - hocon::config\_int, [119](#)
  - hocon::config\_list, [128](#)
  - hocon::config\_long, [137](#)

- hocon::config\_null, 163
- hocon::config\_number, 172
- hocon::config\_object, 182
- hocon::config\_parseable, 196
- hocon::config\_reference, 201
- hocon::config\_string, 217
- hocon::config\_value, 227
- hocon::parseable, 266
- hocon::parseable\_file, 268
- hocon::parseable\_not\_found, 270
- hocon::parseable\_resources, 272
- hocon::parseable\_string, 275
- hocon::simple\_config\_list, 296
- hocon::simple\_config\_object, 308
- hocon::validation\_problem, 334
- hocon::value, 336
- origin\_type
  - hocon, 23
- OutListIter
  - OutListIter< T >, 261
- OutListIter< T >, 261
  - getList, 262
  - operator\*, 262
  - operator++, 262
  - OutListIter, 261
- parent
  - hocon::path, 277
- parse
  - hocon::config\_parseable, 196
  - hocon::parseable, 266
  - hocon::parseable\_file, 268
  - hocon::parseable\_not\_found, 270
  - hocon::parseable\_resources, 273
  - hocon::parseable\_string, 275
- parse\_exception
  - hocon::parse\_exception, 264
- parse\_file\_any\_syntax
  - hocon::config, 45, 46
- parse\_options
  - hocon::config\_include\_context, 110
  - hocon::simple\_include\_context, 319
- parse\_single\_value
  - hocon::config\_document\_parser::parse\_context, 263
- parse\_string
  - hocon::config, 46, 47
- parseable
  - hocon::config, 53
- path
  - hocon::validation\_problem, 335
- path\_from\_root
  - hocon::resolve\_source::result\_with\_path, 286
- popped\_front
  - List< T >, 251
- prepend\_includer
  - hocon::config\_parse\_options, 193
- problem
  - hocon::validation\_problem, 335
- problems
  - hocon::validation\_failed\_exception, 333
- pushed\_front
  - List< T >, 251
- reader
  - hocon::parseable\_file, 269
  - hocon::parseable\_not\_found, 271
  - hocon::parseable\_resources, 273
  - hocon::parseable\_string, 275
- relative\_to
  - hocon::config\_include\_context, 111
  - hocon::simple\_include\_context, 319
- relativized
  - hocon::config\_boolean, 57
  - hocon::config\_concatenation, 66
  - hocon::config\_delayed\_merge, 76
  - hocon::config\_delayed\_merge\_object, 89
  - hocon::config\_double, 103
  - hocon::config\_int, 119
  - hocon::config\_list, 128
  - hocon::config\_long, 137
  - hocon::config\_null, 163
  - hocon::config\_number, 173
  - hocon::config\_object, 182
  - hocon::config\_reference, 201
  - hocon::config\_string, 218
  - hocon::config\_value, 227
  - hocon::simple\_config\_list, 297
  - hocon::simple\_config\_object, 309
- remainder
  - hocon::path, 277
- removed
  - List< T >, 252
- removed1
  - List< T >, 252
- render
  - hocon::abstract\_config\_node, 29
  - hocon::abstract\_config\_node\_value, 30
  - hocon::config\_boolean, 58
  - hocon::config\_concatenation, 66, 67
  - hocon::config\_delayed\_merge, 77, 78
  - hocon::config\_delayed\_merge\_object, 89, 90
  - hocon::config\_document, 97
  - hocon::config\_double, 103, 104
  - hocon::config\_int, 120
  - hocon::config\_list, 128, 129
  - hocon::config\_long, 138
  - hocon::config\_node, 145
  - hocon::config\_node\_array, 146
  - hocon::config\_node\_comment, 147
  - hocon::config\_node\_complex\_value, 148
  - hocon::config\_node\_concatenation, 150
  - hocon::config\_node\_field, 151
  - hocon::config\_node\_include, 152
  - hocon::config\_node\_object, 154
  - hocon::config\_node\_path, 155
  - hocon::config\_node\_root, 157
  - hocon::config\_node\_simple\_value, 158

- hocon::config\_node\_single\_token, 159
- hocon::config\_null, 164, 165
- hocon::config\_number, 173
- hocon::config\_object, 182, 183
- hocon::config\_reference, 201, 202
- hocon::config\_string, 218, 219
- hocon::config\_value, 227, 228
- hocon::path, 277
- hocon::simple\_config\_document, 287
- hocon::simple\_config\_list, 297, 298
- hocon::simple\_config\_object, 309, 310
- replace\_child
  - hocon::config\_concatenation, 67
  - hocon::config\_delayed\_merge, 78
  - hocon::config\_delayed\_merge\_object, 90
  - hocon::container, 235
  - hocon::replaceable\_merge\_stack, 282
  - hocon::simple\_config\_list, 298
  - hocon::simple\_config\_object, 310
- resolve
  - hocon::config, 47, 48
- resolve\_context
  - hocon::config\_value, 232
- resolve\_result
  - hocon::resolve\_result< V >, 284
- resolve\_source
  - hocon::config\_object, 186
- resolve\_status
  - hocon, 23
- resolve\_substitutions
  - hocon::config\_concatenation, 68
  - hocon::config\_delayed\_merge, 78
  - hocon::config\_delayed\_merge\_object, 91
  - hocon::config\_reference, 203
  - hocon::simple\_config\_list, 298
  - hocon::simple\_config\_object, 310
- resolve\_with
  - hocon::config, 48, 49
- result
  - hocon::path\_builder, 278
  - hocon::resolve\_source::result\_with\_path, 286
- root
  - hocon::config, 49
- set\_allow\_missing
  - hocon::config\_parse\_options, 193
- set\_allow\_unresolved
  - hocon::config\_resolve\_options, 213
- set\_comments
  - hocon::config\_render\_options, 209
- set\_context
  - hocon::file\_name\_source, 238
  - hocon::name\_source, 256
  - hocon::relative\_name\_source, 281
- set\_cur\_dir
  - hocon::config\_include\_context, 111
  - hocon::simple\_include\_context, 320
- set\_formatted
  - hocon::config\_render\_options, 210
- set\_includer
  - hocon::config\_parse\_options, 194
- set\_json
  - hocon::config\_render\_options, 210
- set\_origin\_comments
  - hocon::config\_render\_options, 210
- set\_origin\_description
  - hocon::config\_parse\_options, 194
- set\_syntax
  - hocon::config\_parse\_options, 194
- set\_use\_system\_environment
  - hocon::config\_resolve\_options, 213
- shared\_config
  - hocon, 19
- shared\_container
  - hocon, 19
- shared\_include\_context
  - hocon, 19
- shared\_includer
  - hocon, 19
- shared\_list
  - hocon, 20
- shared\_node
  - hocon, 20
- shared\_node\_array
  - hocon, 20
- shared\_node\_concatenation
  - hocon, 20
- shared\_node\_list
  - hocon, 20
- shared\_node\_object
  - hocon, 20
- shared\_node\_value
  - hocon, 21
- shared\_object
  - hocon, 21
- shared\_origin
  - hocon, 21
- shared\_parseable
  - hocon, 21
- shared\_string
  - hocon, 21
- shared\_token
  - hocon, 21
- shared\_value
  - hocon, 22
- simple\_config\_list
  - hocon::config\_value, 232
- simple\_config\_object
  - hocon::config\_object, 187
  - hocon::config\_value, 232
- simple\_config\_origin
  - hocon::simple\_config\_origin, 316
- size
  - hocon::config\_delayed\_merge\_object, 91
  - hocon::simple\_config\_list, 299
  - hocon::simple\_config\_object, 311
- start\_token



- hocon::tokens, 329
- std, 24
  - begin, 28
  - end, 28
- take
  - List< T >, 252
- time\_unit
  - hocon, 23
- to\_config
  - hocon::config\_delayed\_merge\_object, 91
  - hocon::config\_object, 183
  - hocon::simple\_config\_object, 311
- to\_fallback\_value
  - hocon::config, 49
  - hocon::config\_boolean, 59
  - hocon::config\_concatenation, 68
  - hocon::config\_delayed\_merge, 79
  - hocon::config\_delayed\_merge\_object, 91
  - hocon::config\_double, 104
  - hocon::config\_int, 120
  - hocon::config\_list, 129
  - hocon::config\_long, 138
  - hocon::config\_mergeable, 143
  - hocon::config\_null, 165
  - hocon::config\_number, 174
  - hocon::config\_object, 184
  - hocon::config\_reference, 203
  - hocon::config\_string, 219
  - hocon::config\_value, 228
  - hocon::simple\_config\_list, 299
  - hocon::simple\_config\_object, 311
- to\_string
  - hocon::comment, 35
  - hocon::double\_slash\_comment, 236
  - hocon::hash\_comment, 244
  - hocon::ignored\_whitespace, 245
  - hocon::line, 248
  - hocon::path, 277
  - hocon::problem, 279
  - hocon::substitution, 324
  - hocon::unquoted\_text, 330
  - hocon::validation\_problem, 334
  - hocon::value, 336
- token
  - hocon::config\_value, 232
- token\_list
  - hocon, 22
- token\_text
  - hocon::double\_slash\_comment, 236
  - hocon::hash\_comment, 244
  - hocon::substitution, 325
- token\_type
  - hocon, 23
- transform\_to\_string
  - hocon::config\_boolean, 59
  - hocon::config\_double, 105
  - hocon::config\_int, 121
  - hocon::config\_long, 139
- hocon::config\_null, 165
- hocon::config\_number, 174
- hocon::config\_string, 219
- type
  - hocon::config\_boolean, 55
  - hocon::config\_concatenation, 63
  - hocon::config\_delayed\_merge, 74
  - hocon::config\_delayed\_merge\_object, 84
  - hocon::config\_double, 101
  - hocon::config\_int, 117
  - hocon::config\_list, 126
  - hocon::config\_long, 135
  - hocon::config\_null, 161
  - hocon::config\_number, 171
  - hocon::config\_object, 179
  - hocon::config\_reference, 199
  - hocon::config\_string, 216
  - hocon::config\_value, 225
  - hocon::simple\_config\_list, 292
  - hocon::simple\_config\_object, 304
- type\_name
  - hocon::config\_boolean, 59
  - hocon::config\_concatenation, 68
  - hocon::config\_delayed\_merge, 79
  - hocon::config\_delayed\_merge\_object, 92
  - hocon::config\_double, 105
  - hocon::config\_int, 121
  - hocon::config\_list, 130
  - hocon::config\_long, 139
  - hocon::config\_null, 165
  - hocon::config\_number, 174
  - hocon::config\_object, 184
  - hocon::config\_reference, 203
  - hocon::config\_string, 220
  - hocon::config\_value, 228
  - hocon::simple\_config\_list, 299
  - hocon::simple\_config\_object, 311
- unmerged\_values
  - hocon::config\_concatenation, 68
  - hocon::config\_delayed\_merge, 79
  - hocon::config\_delayed\_merge\_object, 92
  - hocon::config\_reference, 203
- unresolved\_substitution\_exception
  - hocon::unresolved\_substitution\_exception, 331
- unwrapped
  - hocon::config\_boolean, 59
  - hocon::config\_concatenation, 69
  - hocon::config\_delayed\_merge, 79
  - hocon::config\_delayed\_merge\_object, 92
  - hocon::config\_double, 105
  - hocon::config\_int, 121
  - hocon::config\_list, 130
  - hocon::config\_long, 139
  - hocon::config\_null, 165
  - hocon::config\_reference, 203
  - hocon::config\_string, 220
  - hocon::simple\_config\_list, 299
  - hocon::simple\_config\_object, 312



- unwrapped\_value
  - hocon, [22](#)
- validation\_failed\_exception
  - hocon::validation\_failed\_exception, [333](#)
- validation\_problem
  - hocon::validation\_problem, [334](#)
- value
  - hocon::config\_value, [232](#)
  - hocon::resolve\_result< V >, [284](#)
- value\_set
  - hocon::simple\_config\_object, [312](#)
- value\_type
  - hocon::config\_boolean, [59](#)
  - hocon::config\_concatenation, [69](#)
  - hocon::config\_delayed\_merge, [79](#)
  - hocon::config\_delayed\_merge\_object, [92](#)
  - hocon::config\_double, [105](#)
  - hocon::config\_int, [121](#)
  - hocon::config\_list, [130](#)
  - hocon::config\_long, [139](#)
  - hocon::config\_null, [166](#)
  - hocon::config\_number, [174](#)
  - hocon::config\_object, [184](#)
  - hocon::config\_reference, [204](#)
  - hocon::config\_string, [220](#)
  - hocon::config\_value, [229](#)
  - hocon::simple\_config\_list, [299](#)
  - hocon::simple\_config\_object, [312](#)
- value\_type\_name
  - hocon::config\_boolean, [60](#)
  - hocon::config\_concatenation, [69](#)
  - hocon::config\_delayed\_merge, [80](#)
  - hocon::config\_delayed\_merge\_object, [92](#)
  - hocon::config\_double, [105](#)
  - hocon::config\_int, [121](#)
  - hocon::config\_list, [130](#)
  - hocon::config\_long, [139](#)
  - hocon::config\_null, [166](#)
  - hocon::config\_number, [175](#)
  - hocon::config\_object, [184](#)
  - hocon::config\_reference, [204](#)
  - hocon::config\_string, [220](#)
  - hocon::config\_value, [229](#)
  - hocon::simple\_config\_list, [300](#)
  - hocon::simple\_config\_object, [312](#)
- version.h
  - CPP\_HOCON\_VERSION, [358](#)
  - CPP\_HOCON\_VERSION\_MAJOR, [358](#)
  - CPP\_HOCON\_VERSION\_MINOR, [358](#)
  - CPP\_HOCON\_VERSION\_PATCH, [358](#)
  - CPP\_HOCON\_VERSION\_WITH\_COMMIT, [358](#)
- with\_comments
  - hocon::config\_origin, [189](#)
  - hocon::simple\_config\_origin, [317](#)
- with\_fallback
  - hocon::config, [49](#)
  - hocon::config\_boolean, [60](#)
  - hocon::config\_concatenation, [69](#)
  - hocon::config\_delayed\_merge, [80](#)
  - hocon::config\_delayed\_merge\_object, [93](#)
  - hocon::config\_double, [106](#)
  - hocon::config\_includer, [113](#)
  - hocon::config\_int, [122](#)
  - hocon::config\_list, [130](#)
  - hocon::config\_long, [140](#)
  - hocon::config\_mergeable, [143](#)
  - hocon::config\_null, [166](#)
  - hocon::config\_number, [175](#)
  - hocon::config\_object, [184](#)
  - hocon::config\_reference, [204](#)
  - hocon::config\_string, [220](#)
  - hocon::config\_value, [229](#)
  - hocon::full\_includer, [240](#)
  - hocon::simple\_config\_list, [300](#)
  - hocon::simple\_config\_object, [312](#)
  - hocon::simple\_includer, [322](#)
- with\_fallbacks\_ignored
  - hocon::simple\_config\_object, [313](#)
- with\_line\_number
  - hocon::config\_origin, [189](#)
  - hocon::simple\_config\_origin, [318](#)
- with\_only\_path
  - hocon::config, [50](#)
  - hocon::config\_delayed\_merge\_object, [94](#)
  - hocon::simple\_config\_object, [313](#)
- with\_only\_path\_or\_null
  - hocon::config\_delayed\_merge\_object, [94](#)
  - hocon::config\_object, [185](#)
  - hocon::simple\_config\_object, [314](#)
- with\_origin
  - hocon::config\_boolean, [61](#)
  - hocon::config\_concatenation, [70](#)
  - hocon::config\_delayed\_merge, [81](#)
  - hocon::config\_delayed\_merge\_object, [94](#)
  - hocon::config\_double, [107](#)
  - hocon::config\_int, [123](#)
  - hocon::config\_list, [131](#)
  - hocon::config\_long, [141](#)
  - hocon::config\_null, [167](#)
  - hocon::config\_number, [176](#)
  - hocon::config\_object, [185](#)
  - hocon::config\_reference, [205](#)
  - hocon::config\_string, [221](#)
  - hocon::config\_value, [230](#)
  - hocon::simple\_config\_list, [301](#)
  - hocon::simple\_config\_object, [314](#)
- with\_value
  - hocon::config, [52](#)
  - hocon::config\_delayed\_merge\_object, [94, 95](#)
  - hocon::config\_document, [97](#)
  - hocon::simple\_config\_document, [287](#)
  - hocon::simple\_config\_object, [314](#)
- with\_value\_text
  - hocon::config\_document, [97](#)
  - hocon::simple\_config\_document, [288](#)

without\_path  
    hocon::config, [52](#)  
    hocon::config\_delayed\_merge\_object, [95](#)  
    hocon::config\_document, [98](#)  
    hocon::simple\_config\_document, [288](#)  
    hocon::simple\_config\_object, [315](#)  
wrong\_type\_exception  
    hocon::wrong\_type\_exception, [337](#)